

### Professionale pentru echipamente profesionale





### heating elements

### heating elements for ovens








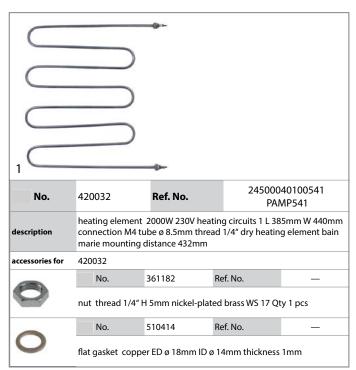



### heating elements for crepes makers




### heating elements for bain maries

connection male faston 6.3mm






### heating elements for fryers

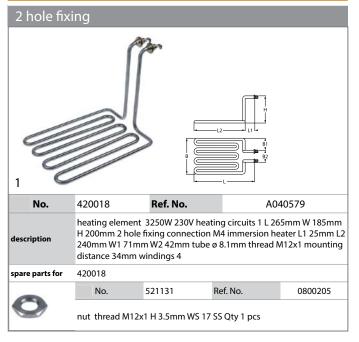






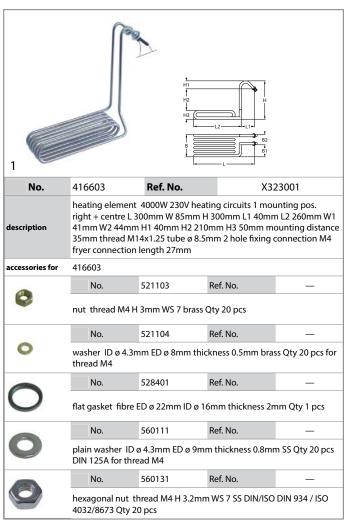




DIN 125A for thread M4

accessories for	416548			
	No.	560131	Ref. No.	_
	hexagonal nut thread M4 H 3.2mm WS 7 SS DIN/ISO DIN 934 / ISO 4032/8673 Qty 20 pcs			

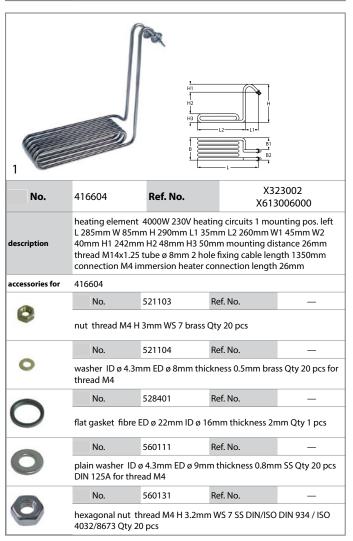



### heating elements for hot counters

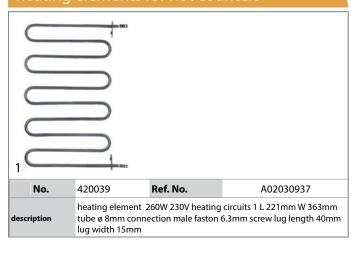






### heating elements for refrigeration















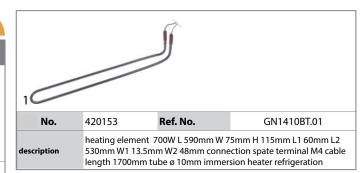

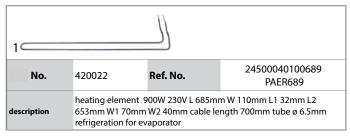





### heating elements for tilting bratt pan

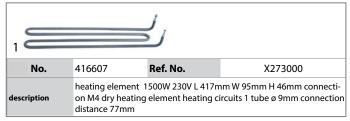



### heating elements for contact grills

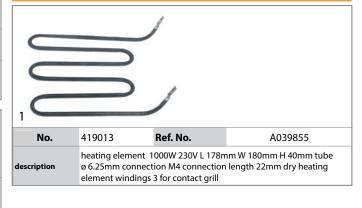












M4 mounting pos. upper dry heating element for contact grill


### heating elements for pizza ovens




### heating elements for pizza presses

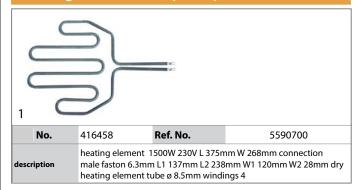

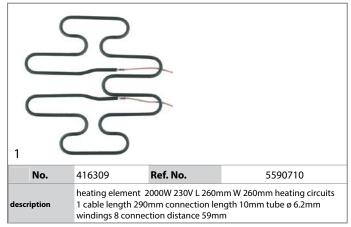


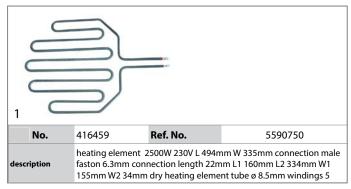


### heating elements for salamanders/toast-






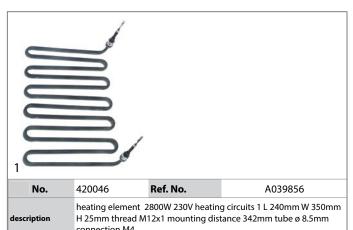


### heating elements for heating bridges

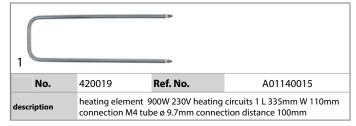



### heating elements for heated cabinets






### heating cables

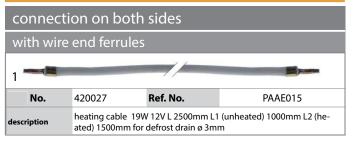




### heating plates




### quartz heating elements





1=			
No.	420047	Ref. No.	A041032
description	quartz heating ele eye for model A15		. 385mm ø 11mm connection


### immersion heating elements











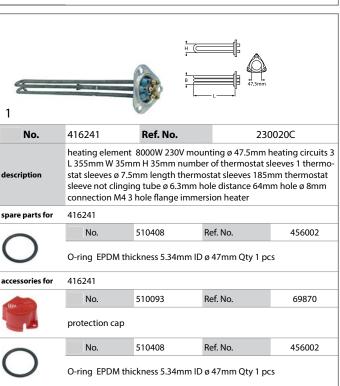

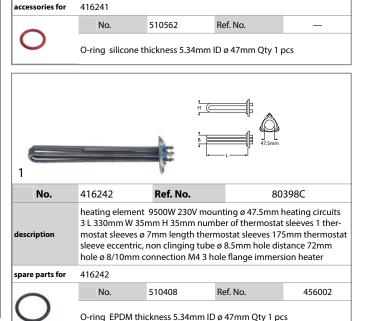















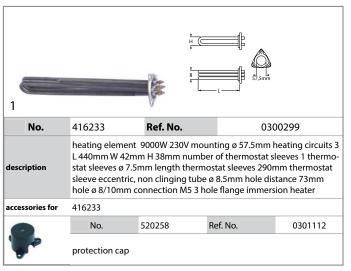

















1				
No.	417197	Ref. No.	T323	006000
description	35mm hole dista 105mm flange w	ince 48mm hole ø vidth 60mm imme	ting circuits 3 L 28 6mm tube ø 8.5m rsion heater therm ves 1 length thern	m flange length nostat sleeves
accessories for	417197			
0	No.	550994	Ref. No.	T323007000
	gasket L 105mm	n W 60mm thickne	ss 3mm for heatin	g element

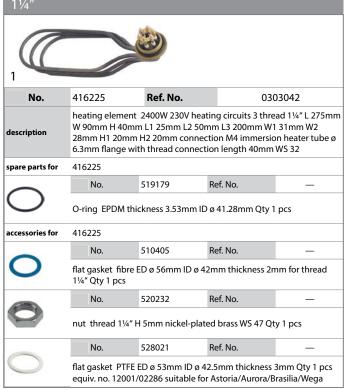

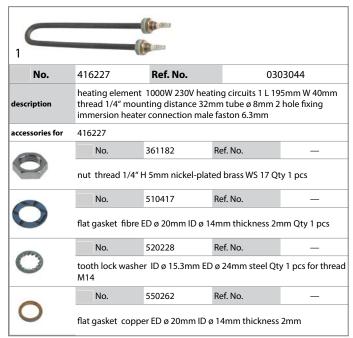





### heating elements for convection






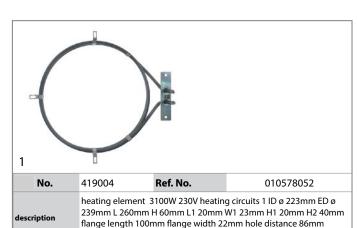

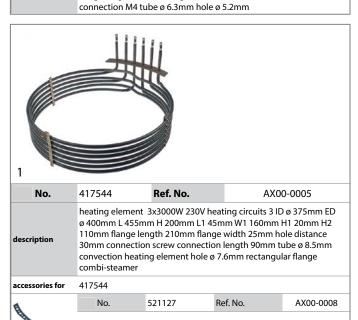

gasket L 210mm W 24mm thickness 2mm for heating element



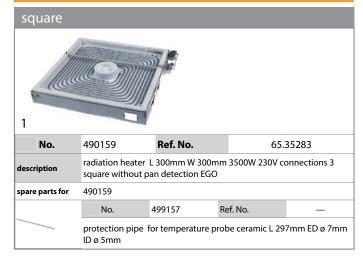





### hot plates

### round












### energy regulators

### FGO

# 1-circuit No. 380016 Ref. No. 65.35287 description energy regulator 230V 12A dual circuit turn direction right with operation switch 1-pole

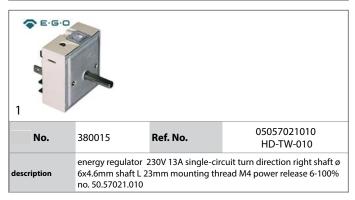


### DIAMOND




### thermostats


### bi-metal thermostats

## No. 390708 Ref. No. A039889 bi-metal safety thermostat hole distance 23.5mm switch-off temp. 180°C 1NC 1-pole 16A connection M3 mounting ø 15mm

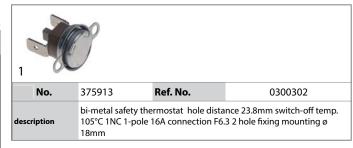











1	C				
No.	390451	Ref. No.	R2	13004	
description	bi-metal safety thermostat hole distancemm switch-off temp. 115°C 1NC 1-pole 16A connection F6.3				
accessories for	390451				
	No.	505093	Ref. No.	_	
0	gasket for therm no. N503017	ostat ED ø 35mm	ID ø 24mm thickr	ness 7mm equiv.	




### bi-metal thermostats No. 390301 Ref. No. 236035 bi-metal thermostat hole distance 23.8mm switch-off temp. 60°C 1NC 1-pole 16A connection F6.3 2 hole fixing

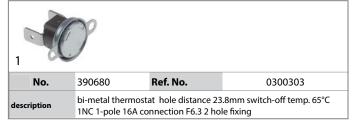







### control and safety thermostats

### EGO

### control thermostats

### 55.10/19 series



No.	375273	Ref. No.	5320400			
description	16A probe ø 6mm	probe L 74mm cap	e range 60-200°C 1-pole 1NO illary pipe 1500mm capillary mm shaft position upper			



No.	375270	Ref. No.	GH400-016
description	16A probe ø 4mm	probe L 100mm ca	e range 45-295°C 1-pole 1NO pillary pipe 900mm capillary L 23mm shaft position upper





position upper rotation 270°













16A probe ø 3.03m	nm probe L 160mm 103mm gland nut	erange 50-300°C 1-pole 1CO capillary pipe 1130mm capil- shaft L 23mm shaft position









knob thermostat t.max. 85°C ø 50mm shaft ø 6x4.6mm shaft flat

upper black temperature range 30-85°C











55.33\_ series


































# PRODIGY / FIRT control thermostats No. 390733 Ref. No. 0300270 thermostat t.max. 90°C temperature range 30-90°C 1-pole 16A probe Ø 6.5mm probe L 85mm capillary pipe 1350mm capillary pipe isolated 1325mm shaft Ø 6x4.6mm shaft L 5mm rotation 270° 230V

# safety thermostats No. 375523 Ref. No. A039891 safety thermostat switch-off temp. 230°C 1-pole 1NC 16A probe ø 4mm probe L 100mm capillary pipe 900mm capillary pipe isolated 410mm gland nut probe

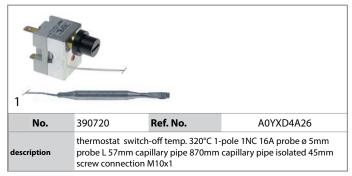

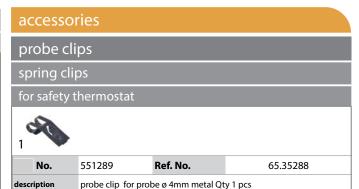






### switches and momentary switches

### rocker/momentary rocker switches

### 30x11mm No. 345382 Ref. No. INTER001 rocker switch mounting measurements 30x11mm green 1NO/ indicator light 250V 16A 0-I connection male faston 6.3mm ambient temperature max. 85°C protection IP40






1			
No.	301038	Ref. No.	SHELSWAYA100
description	rocker switch mou tor light 250V 16A		nts 30x11mm green 1NO/indica- iston 6.3mm

1			
No.	301039	Ref. No.	24500040100295 PDOF295
description	rocker switch mou light 250V 16A con	•	nts 30x11mm red 1NO/indicator n 6.3mm

1			
No.	301035	Ref. No.	PC187B-036 PC188B-036 PC190B-036
description	protective cover r	mounting measuren	nents 30x11mm


30x22mm


1			
No.	347791	Ref. No.	A040573 HD-TW-008 S900.01 SL0621
description		l connection male f	nts 30x22mm green 2NO 230V faston 6.3mm ambient tempera- ith rubber collar



1				
No.	301001	Ref. No.	PDN	ИО290
description		onnection male fa	nents 30x22mm re ston 6.3mm ambie	
accessories for	301001			
1	No.	301036	Ref. No.	_
	protective cover internal size 30x22mm for rocker switch mounting measurementsmm			

1					
No.	345491	Ref. No.	Z2°	13033	
description	momentary rocker switch mounting measurements 30x22mm orange 1NO/indicator light 250V 16A connection male faston 6.3mm ambient temperature max. 100/55°C protection IP40				
accessories for	345491				
1	No.	301036	Ref. No.	_	
	protective cover internal size 30x22mm for rocker switch mounting measurementsmm				






### push/momentary push switches

## 1 No. 347167 Ref. No. 0301009 Momentary push switch mounting measurements 19x13mm black 1NO 250V 16A non-illuminated connection male faston 4.8mm 1-pole







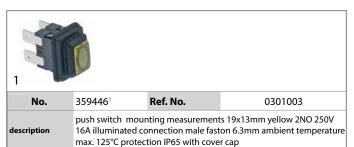


### illuminated


### 28.5x28.5mm No. 345498 Ref. No. 0301101 momentary push switch mounting measurements 28.5x28.5mm green 2NO 250V 16A connection male faston 6.3mm ambient temperature max. 150°C protection IP40

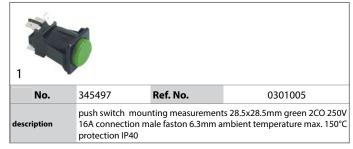





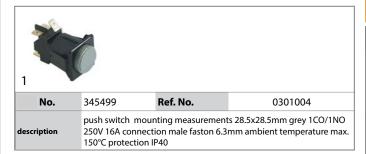

30x22mm					
1					
No.	345712	Ref. No.		2	96
description	push switch mounting measurements 30x22mm red/green 2CO 250V 16A Stop / I connection male faston 6.3mm ambient tempera- ture max. 85°C protection IP40 with indicator				
accessories for	345712				
-	No.	301127	Ref. No.		285
(50)	protective cover internal size 30x55mm tra				








### accessories

fitting parts				
1				
No.	401785	Ref. No.	S322613	
description	mounting pla	ate for switch		

### toggle switches

description

### M12x0.75 No. 346526 Ref. No. 24500040100960 PDOF960 toggle switch thread M12x0.75 1CO 250V 15A ON-ON male faston

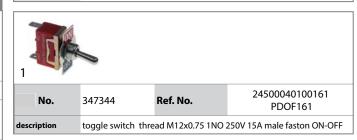





No. 346842 Ref. No. 5320050

description toggle switch thread M12x0.75 2NO 250V 15A male faston ON-OFF

### M12x1 No. 347340 Ref. No. A01140013

toggle switch thread M12x1 1NO 250V 15A ON-OFF screw

### microswitches

description

### lever actuated



No.	345125	Ref. No.	5400250 927246
description		ure max. 85°C mou	O connection male faston 6.3mm nting distance 25mm type gth 63.5mm

1	0		
No.	347346	Ref. No.	PTDR503
description	microswitch with lever 250V 16A 1CO connection screw ambient temperature max. 125°C lever length 147mm		

### pin-plunger actuated

### M10



No.	347341	Ref. No.	A040031
description	10A 1NO connection	on male faston 6.3n . 41mm ambient tei	0x1 thread L 16mm 250V nm stroke 5mm moun- mperature max. 85°C type

## M12 No. 345138 Ref. No. 010578032 microswitch with plunger mounting distance 25mm thread M12x1 thread L 12mm 250V 20A 1CO connection screw stroke 7mm L1 13mm ambient temperature max. 85°C type Z15G1307 actuating force: 250g

### with push button

### switches with snap-fit



No.	346772	Ref. No.	GN650TN.48
			5A 1CO connection male faston ture max. 85°C actuating force:



NO.	34/34/	Ket. No.	PTDR/29	
description			5A 1NO connection male faston	
	4 8mm   20v25mm ambient temperature may 85°C			

### roller actuated

### roller 0°



No.	345639	Ref. No.	5400100				
description	screw connection	L1 49mm ambient	16A 1CO connection solder/ temperature max. 125°C thread ce 25mm actuating force: 300g				

### roller 90°




No.	347434	Ref. No.	8301380
description	microswitch with 85°C thread M12x1		O ambient temperature max.

### system switches (ROLD)





No.	345537	Ref. No.	0301051
	element holder me for push buttons 1		ents 20.6x16.4mm grey arched








1			
No.	345606	Ref. No.	226071
description	momentary switch 6.3mm	n unit 2CO 250V 16	A connection male faston

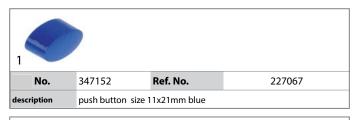







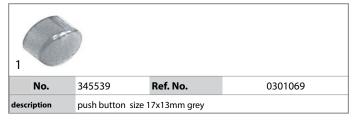




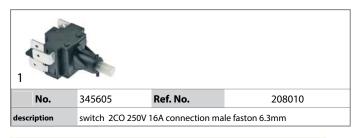











No.	347366	Ref. No.	A040081
description	shaft ø 6x4.6mm s	J 1	NO sequence 0-1-2-3 16A ection male faston 6.3mm 250V oven

### operation switches



No.	300209	Ref. No.	65.52194		
description	0-1-2-3-4 shaft ø 6	x4.6mm shaft L 23n	eration switch 16A sequence mm connection male faston		
	ceramic 3-pole am	ceramic 3-pole ambient temperature max, 330°C			



No.	300200	Ref. No.	65.28979
description			ns 2NO 16A sequence 0-1 shaft male faston 6.3mm operation

### rotary switches

### BREMAS

### A1200 series



No.	345274	Ref. No.	5320010
		of contacts 4 2 0-1 3mm shaft square o	type CA0120004 380V 12A shaf connection screw

### GIOVENZANA

### rotary switches



No.	347634	Ref. No.	5320080
			type A87AZ69004 690V 20A ar-shaped connection screw

### KRAUS & NAIMER

### rotary switches



No.	345431	Ref. No.	8301310
description			type 9A003PL-2V 400V 2A shaft ed connection screw

### LOVATO



1					
No.	347429 <sup>1</sup>	Ref. No.	(	301022	
description	rotary switch 3 0-1-2 sets of contacts 3 type GN209773U20 690V 20A shaft ø 6x6mm shaft L 15mm shaft square connection screw				
spare parts for	347429	347429			
	No.	112633	Ref. No.	0300352	
	knob ø 33mr	n shaft ø 6x6mm	grey		


incl. knob



1				
No.	345799	Ref. No.		0300206 0301025
description	rotary switch 41-2-3-4 sets of contacts 7 type GN20 9779 U20 690V 20A shaft ø 6x6mm shaft L 13.5mm shaft square connection screw			
accessories for	345799	345799		
	No.	112633	Ref. No.	0300352
	knob ø 33mm shaft ø 6x6mm grey			






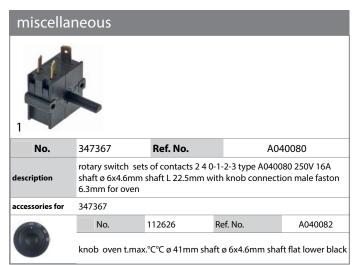


### levers No. 347168 Ref. No. 0301084 description lever 0-1 lever length 118mm L 90mm W 90mm shaft 8x8mm mounting distance 68x68mm

magnetic switches


# 23x14mm 1 No. 347995 Ref. No. EA01-0015 magnetic switch L 23mm W 14mm 1NO 180V 0.5A P max. 10W connection cable cable length 500mm

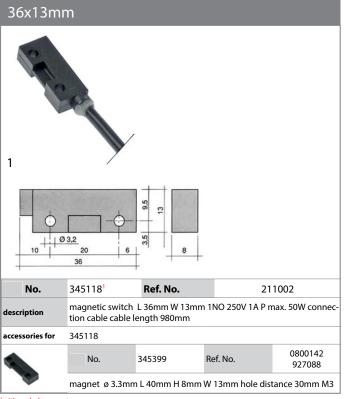



<sup>1</sup>with coded connector

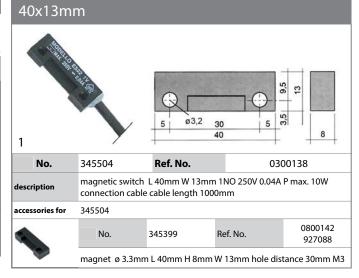



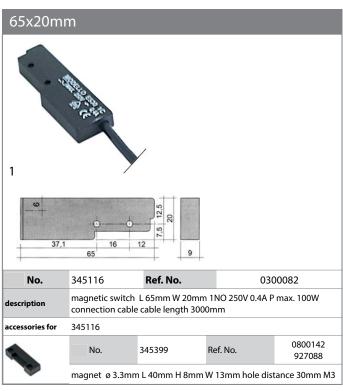












### control equipment


### **SIEMENS**

### 3SB series ø22mm new

### switches (complete)



No.	347942	Ref. No.	030	01010	
description	momentary push switch mounting measurements ø22mm blue 1NO non-illuminated				
spare parts for	347942				
	No.	346630	Ref. No.	_	
	contact block SIEMENS 3SB3400-0B 1NO max 400V 10A black				





### electric components

### **TELEMECANIQUE (EFA)**

### XA2 series


### switches (complete)




No.	345435	Ref. No.	8301060
description	momentary push s	switch mounting m	neasurements ø22mm 1NO


No.	345461	Ref. No.	830	01050	
description	mushroom switch mounting measurements ø22mm 1NC EMERGEN- CY SHUT-DOWN				
spare parts for	345461				
-	No.	345221	Ref. No.	_	
	contact block EFA ZB2BE102 1NC max 230V 10(6)A black				
40	No.	346660	Ref. No.	_	
P	contact block holder				
accessories for	345461				
	No.	345220	Ref. No.	_	
3.16	contact block E	FA ZB2BE101 1NO	max 230V 10(6)A	black	

### miscellaneous

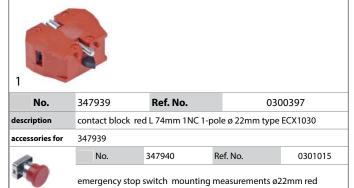


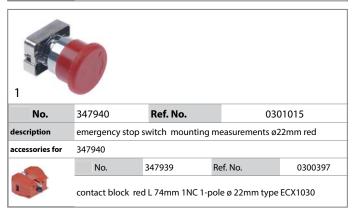

### lamps

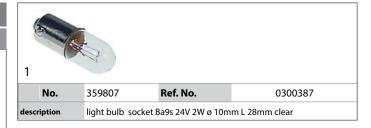

### encoders and potentiometers



### lamps

### indicator lights

indicator lights 2-piece (lens and indicator lamp)

indicator lamps for socket type SA / SC / SD / SF / SR



No.	359520	Ref. No.	LAMPA002
escription	indicator lamp 400 silicone Qty 1 pcs	OV green connection	n cable 400mm cable material


### indicator lights 3-piece (housing, lens and bulb)

### lamps

### light bulbs




<u>'</u>				
No.	359807	Ref. No.	0300387	
description	light bulb socket Ba9s 24V 2W ø 10mm L 28mm clear			






### indicator lights (complete) Ø 6mm No. 359005 Ref. No. 216025 description indicator light Ø 6mm 230V yellow cable length 400mm

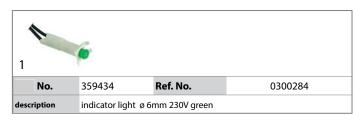


ø 9mm	ø 9mm					
1	•					
No.	359135	Ref. No.	65.37606			
description	indicator light ø 9mm 230V red connection male faston 6.3mm tempresist. 120°C with lens					

	1	•		
	No.	359137	Ref. No.	65.37607
description indicator light ø 9mm 230V yellow connection male faston 6.3 tempresist. 120°C with lens			onnection male faston 6.3mm	

### 




1			
No.	360578	Ref. No.	0301907
description	indicator light ø 10mm white 24V connection cable cable length 200mm		





1	0		
No.	360481	Ref. No.	SHELSLYSA100
description	indicator light ø 1 screw base	0mm 250V green ca	able length 300mm socket

with plug-in socket					
1					
No.	359040	Ref. No.	YFKO-019		
description	indicator light ø 10mm red 230V connection male faston 2.8mm Qty 1 pcs				

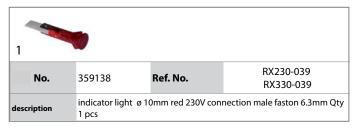


1/	-		
No.	359263	Ref. No.	5371120
description indicator light ø 10mm			













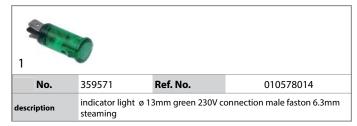













1	10		
No.	360661	Ref. No.	65.40107
description	indicator light ø 12mm yellow 400V connection cable 700mm		

ø13mm					
with screw	socket				
1					
No.	359146	Ref. No.	65.	40106	
description	indicator light ø	13mm 230V yello	w		
accessories for	359146				
	No.	510302	Ref. No.	0200103	
$\circ$	O-ring EPDM ID ø 12.42mm thickness 1.78mm Qty 1 pcs				
	No.	511505	Ref. No.	_	
O	O-ring EPDM thi	ckness 1.78mm ID	ø 12.42mm Qty 1	0 pcs	







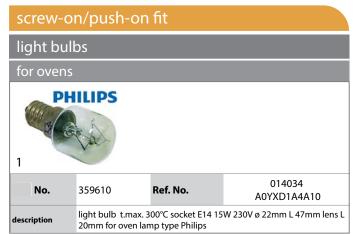








### halogen lamp for socket G4 / G6.35 / G9 No. 359599 Ref. No. EA13-0100 description halogen lamp socket G4 12V 20W temp.-resist. 500°C



### linear lamps

halogen lamps					
1 *	10 <u>-</u> 10-0	- CE			
No.	359313	Ref. No.	24500040100040 PLH040		
description	halogen lamp	halogen lamp socket R7s L 117.6mm 230V 150W IMPORT			

### sockets for linear lamps R7s



<sup>1</sup>only suitable for linear halogen lamps up to max. 160W

### fluorescent lamps

### fluorescent lamps

complete with holder

1

 No.
 357115
 Ref. No.
 SHELAR36A100

 description
 fluorescent lamp L 1224mm W 23mm 28W 220/240V type TCH128 1xTL5-28W/830 HF

### accessories

### starter



No.	380464	Ref. No.	24500040100166 PSTR166
description	starter 4-65W		

### pallasts



No.	402563	Ref. No.	24500040100153 PML153		
description	electrical ballast 40W 230V for fluorescent lamps				

### oven lamps

### universal oven lamps


### mounting diameter 35.5mm



577	30				
No.	359718	Ref. No.		A0YXD1A4A12	
description		oven lamp mounting ø 35.5mm 230V 15W socket E14 tempresist. 300°C connection male faston 6.3mm hard glas			
spare parts for	359718	359718			
4	No.	359701	Ref. No.	_	
The state of the s	lamp socket socket E14 220-230V mounting ø 35.5mm connection male faston 6.3mm 15W				
Maria	No.	359740	Ref. No.	_	
BE	_	nax. 300°C socket en lamp IMPORT	E14 15W 230\	V ø 22mm L 48mm	lens L




lamps

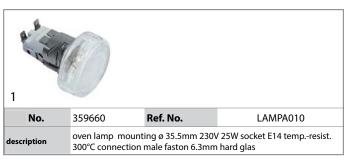




### PHILIPS No. 359610 Ref. No. 014034 A0YXD1A4A10 description light bulb t.max. 300°C socket E14 15W 230V ø 22mm L 47mm lens L 20mm for oven lamp type Philips

halogen lamps					
for socket	for socket G4 / G6.35 / G9				
1 500°C	1 500°C				
<b>No.</b> 359599 <b>Ref. No.</b> EA13-0100					
description	halogen lamp socket G4 12V 20W tempresist. 500°C				



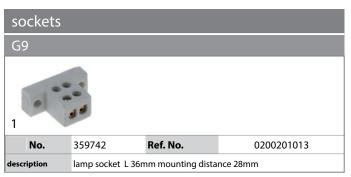

### timers

### programme timer




No.	402949	Ref. No.	0300829
description	electronic timer 9.		hambers operation time 230V








No.	360257	Ref. No.	030	00117
description	timer CDC 4904F engines 1 chambers 4 operation time 6min 230V shaft ømm shaft Lmm manuf. no. 4904F3 / 360257 motor type M48L ATS			
spare parts for	360257			
	No.	360083	Ref. No.	_
<b>9</b>	motor CDC pinion ø 4.9mm teeth 10 230V turn direction left motor ø 47mm H 19.3mm motor type M48L ATS for timer			



description	shaft ømm sl	naft Lmm			
spare parts for	360393				
	No.	360118	Ref. No.	_	
	motor CDC pinion ø 4.9mm teeth 10 230V voltage AC 50/60Hz turn direction right motor ø 47mm H 19.3mm motor type M48R ATS for timer cable length 260mm 1.9/2.5W				

0300803

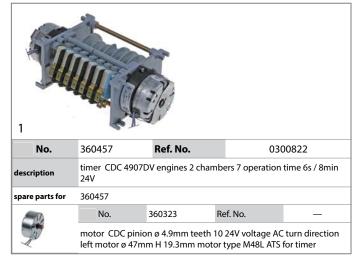



No.	360255	Ref. No.		00806 00807	
description	timer CDC 7003F engines 1 chambers 3 operation time 6min 230V shaft ø 6x4.6mm shaft L 20mm manuf. no. 7003F3 / 360255 motor type M37LN				
spare parts for	360255				
	No.	360131	Ref. No.	_	
	motor CDC pinion ø 5.4mm teeth 12 230V turn direction left motor ø 37mm motor type M37LN for timer				
accessories for	360255				
	No.	110905	Ref. No.	0300049	
	knob switch zero	mark ø 42mm sh	aft ø 6x4.6mm sha	aft flat right black	



I				
No.	360254	Ref. No.		0300085
description	timer CDC 7802 engines 1 chambers 2 operation time 60s 230V manuf. no. 7802M1 / 0300085 motor type M37RN			
spare parts for	360254			
60	No.	360119	Ref. No.	_
	motor CDC pinion ø 5.4mm teeth 12 230V turn direction right motor ø 37mm motor type M37RN for timer			





1	100	1		
No.	360256	Ref. No.	(	0300143
description	timer CDC 7804F engines 1 chambers 4 operation time 120s 230V shaft ømm shaft Lmm manuf. no. 7804F1 / 360256 motor type M37RN			
spare parts for	360256	360256		
F0	No.	360119	Ref. No.	_
	motor CDC p	oinion ø 5.4mm tee	eth 12 230V turn di	rection right motor


ø 37mm motor type M37RN for timer





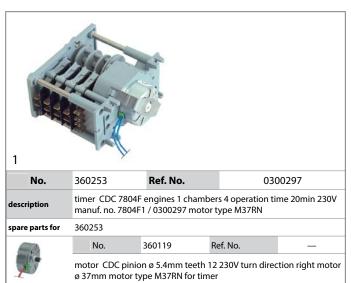









### mechanical timers





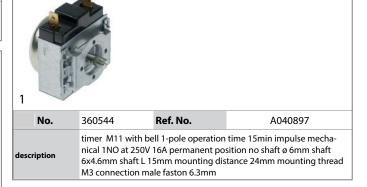








### incl. knob

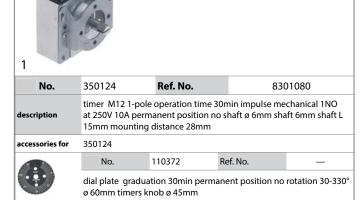

shaft ø 6mm shaft L 15mm connection male faston 6.3mm

### audible timers



### alarm devices

### loudspeakers



### contactors

### **GENERAL ELECTRIC (AEG)**

# No. 381345 Ref. No. 65.223002 | Description | Provided Head of the Content of th




No.	380237	Ref. No.	0300392
description		liary contacts 1NC o	BOVAC (AC3/400V) 6A/3kW main connection male faston 6.3mm













type AEG LS4K 10A type GE CL00A 310

power contactor resistive load 25A 230VAC (AC3/400V) 9A/4kW main

contacts 3NO auxiliary contacts 1NO connection screw connection

### SIEMENS

description

### power contactors



No.	380390	Ref. No.	80351
description	'	auxiliary contacts	80VAC (AC3/400V) 12A/5.5kW connection screw connection

# notor protection circuit breakers No. 380541 Ref. No. DEI35 description motor protection circuit breaker type 3RV1011-0JA10 setting range 0.7-1A (AC3/400V) 0.25kW

### **TELEMECANIQUE** (Schneider Electric)

### power contactors



1			
No.	380479	Ref. No.	0300050
description	power contactor resistive load 25A 230VAC (AC3/400V) 9A/4kl main contacts 3NO auxiliary contacts 1NO/1NC connection scr connection type LC1D09P7		



No.	380979	Ref. No.	EA02-0004
escription		auxiliary contacts	BOVAC (AC3/400V) 25A/11kW 1NO/1NC connection screw



### miscellaneous

### power contactors



I			
No.	380915	Ref. No.	010578021
description	power contactor 230V resistive load 32A main contacts 3NO auxiliary contacts 1NO connection screw type CJX2-1810 SHAPU		

### solid state relays


### CELDUC





### relays


### power relays



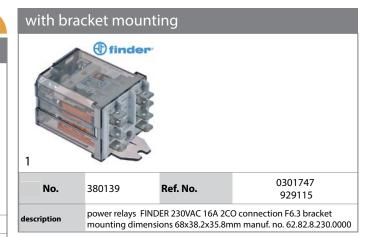






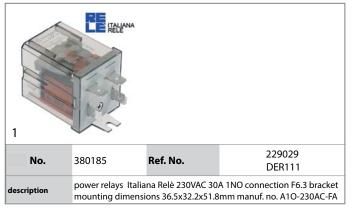





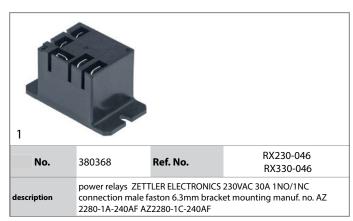


### accessories




### transformers

### open transformers

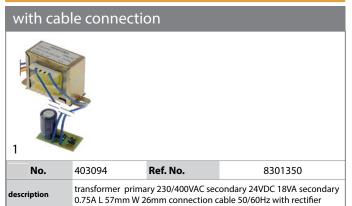

### toroidal core transformers



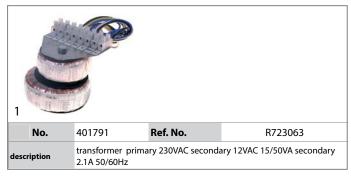

### encapsulated transformers







### electronic controllers

### DIXELL

### refrigeration controllers



No.	378256	Ref. No.	S900.02
ription	ments 71x29mm b	uilt-in depth 56mn ) NTC protection IP	5N0C0 mounting measure- n 230V voltage AC NTC relay 54 defrosting function/time ligit

spare parts for 378256

desc

			RC0321
No.	379161	Ref. No.	S900.32
			3900.32

temperature probe NTC 10kOhm cable thermoplastic probe -40 up to  $+110^{\circ}$ C cable -40 up to  $+110^{\circ}$ C probe ø6x14mm cable length 3m without screw connection 2-wire

|--|

No.	378194	Ref. No.	_
	00°C probe ø		obe -20 up to +80°C length 1.5m without

379057 Ref. No. temperature probe  $\,$  NTC 10kOhm cable PVC probe -20 up to +80°C  $\,$ 

cable -10 up to  $100^{\circ}$ C probe ø6x25mm cable length 3m 2-wire

379160 Ref. No. temperature probe NTC 10kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x14mm cable length 1.5m without screw connection 2-wire

379161 Ref. No.

temperature probe NTC 10kOhm cable thermoplastic probe -40 up to  $+110^{\circ}\text{C}$  cable -40 up to  $+110^{\circ}\text{C}$  probe ø6x14mm cable length 3m without screw connection 2-wire

379343 Ref. No.

temperature probe NTC 10kOhm cable silicone probe -40 up to +110°C cable -50 up to +180°C probe ø6x40mm cable length 3m

379458

without screw connection 2-wire

temperature probe NTC 10kOhm cable silicone probe -40 up to  $+110^{\circ}\text{C}$  cable -50 up to  $+180^{\circ}\text{C}$  probe ø6x40mm cable length 1.5m

Ref. No.

71 x 29mm

No.	378267	Ref. No.	PR-C153-082 PR-C200-082
escription	ments 71x29mm b	ouilt-in depth 56mn (8) NTC DI protectio	5N0C1 mounting measure- n 230V voltage AC NTC relay on IP54 defrosting function/time ligit

accessories for 378267

N-	270161	D-f N-	RC0321
No.	379161	Ref. No.	S900.32

PR-C153-082

temperature probe NTC 10kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x14mm cable length 3m without screw connection 2-wire Ref. No. 381249

temperature probe NTC 10kOhm cable PVC probe -40 up to +110°C cable -10 up to 100°C connection 2-wire thread probe ø6x14mm cable length 3m



No.	378273	Ref. No.	GN650BT.16
scription	ments 71x29mm 2		5N0C1 mounting measure- C -40 up to +110°C display 2½ essor relay 20A

### **EKTRON**

des

### refrigeration controllers



1				
No.	378034	Ref. No.		SL0531
description	electronic controller EKTRON type REK31ED-0021 mounting measurements 71x29mm 230V voltage AC NTC/PTC relay outputs 1 CO-8A(4) NTC/PTC NTC/PTC built-in depth 71mm defr. funct. yes -50 up to +95°C display 3 digits			
accessories for	378034			
	No.	379053	Ref. No.	_
	temperature probe PTC 1kOhm cable PVC probe -50 up to +150°C cable -10 up to 100°C probe ø6x30mm cable length 3m without screw connection 2-wire			

Table continues overleaf





accessories for	378034					
	No.	379782	Ref. No.	_		
	temperature probe PTC 1kOhm cable thermoplastic probe -50 u to +150°C cable -40 up to +110°C probe ø6x14mm cable length : 2-wire resistor 1kOhm					

# **EVCO - EVERY CONTROL**

# universal controllers

### huilt-in version



No.	379590	Ref. No.	531	10060		
description	electronic controller EVERY CONTROL mounting measurements 71x29mm 12V voltage AC TC/J protection IP65 0-500°C type FK400A front measurements 33x75mm					
accessories for	379590					
	No.	379051	Ref. No.	_		

temperature probe thermocouple J (Fe-CuNi) cable Vetrotex probe -50 up to +750°C cable -50 up to +350°C probe ø6x100mm cable length 3m without screw connection cable colours red/blue 2-wire

# **KIOUR**

# universal controllers

# built-in version



I						
No.	379491	Ref. No.	24500040100696 PKBM696			
description	electronic controller KIOUR mounting measurements 71x29mm 230V voltage AC PTC relay outputs 2 -19 up to +99°C display 2 digit REF-BERI-SM V2 12A 30A					

# refrigeration controllers

### built-in version



· •						
No.	379494	Ref. No.	PKU	JR714		
description	electronic controller KIOUR type REF-DF-SM V4.2 mounting measurements 71x29mm 230V voltage AC PTC relay outputs 3 NO-25A NO-5A NO-5A PTC level sonsor front measurementsmm built-in depth 76mm protection IP44 accuracy 1% built-in version defr. funct19 up to +99°C display 2½ digit					
accessories for	379494					
	No.	378067	Ref. No.	_		
		up to +180°C pro	ble silicone probe be ø6x40mm cabl			
	No.	378068	Ref. No.	_		
	temperature probe PTC 1kOhm cable silicone probe -50 up to +150°C cable -50 up to +180°C probe ø6x40mm cable length 7m without screw connection 2-wire					
	No.	378069	Ref. No.	_		
	temperature probe PTC 1kOhm cable silicone probe -50 up to +150°C cable -50 up to +180°C probe ø6x40mm cable length 15m without screw connection 2-wire					
	No.	378070	Ref. No.	_		
		up to +180°C pro	ble silicone probe be ø6x40mm cabl			
	No.	379052	Ref. No.	_		
	temperature probe PTC 1kOhm cable silicone probe -50 up to +150°C cable -50 up to +180°C probe ø6x40mm cable length 1.5m without screw connection 2-wire					
	No.	379064	Ref. No.	_		
			ble silicone probe be ø6x40mm cabl			



without screw connection 2-wire


incl. 1x PTC probe









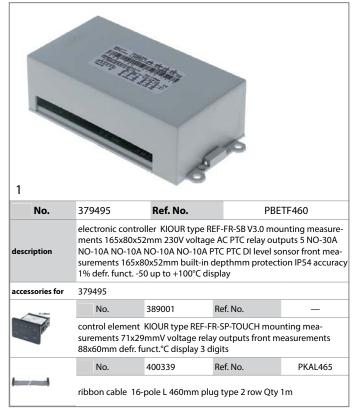



# LAE


# refrigeration controllers



'							
No.	379484	379484 <b>Ref. No.</b> PBETF649					
description	electronic controller LAE type SSD90B35E-C mounting measurements 165x125mm 230V voltage AC PTC relay outputs 6 NO-20A(6) CO-12A(4) NO-8A(3) NO-8A(3) CO-8A(3) NO-7A(2) PTC PTC DI front measurementsmm built-in depthmm protection IP30 yes -50 up to +150°C display						
accessories for	379484						
	No.	378414	Ref. No.	_			
	surface probe PTC 1kOhm cable silicone probe -50 up to +200°C ca- ble -50 up to +180°C connection coded plug thread probe ø6x35mm cable length 2m						





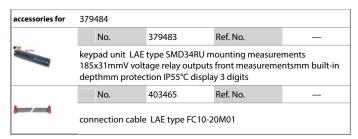




# **SHANGFANG**




# miscellaneous




# probes


# universal probes




1						
No.	379161	Ref. No.	RC0321 S900.32			
description	temperature probe NTC 10kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x14mm cable length 3m without screw connection 2-wire					


# producer-specific probes






1	17.	1/		
No.	402560	Ref. No.	24500040100168 PPRB168	
description	temperature probe PTC cable silicone probe -50 up to +150°C cable -50 up to +180°C connection 2-wire thread probe ø6.5x30mm cable length 1.1m			








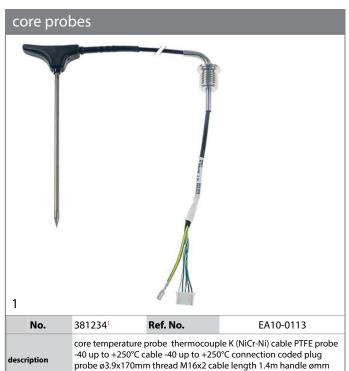


### multipoint probe

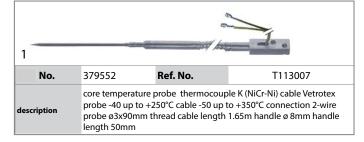

# electronics

# frequency converters


handle length 50mm

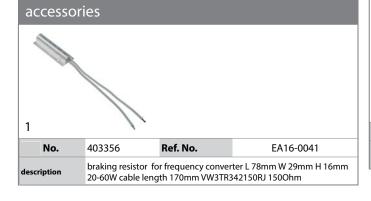


# **PCBs**













































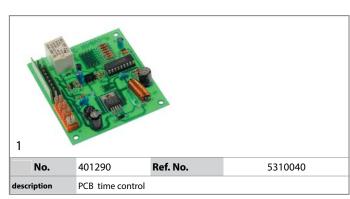



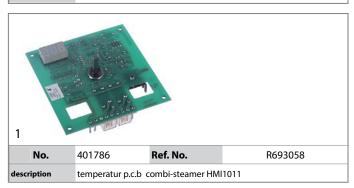

# central units

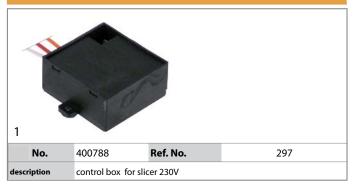


# keypads


# front foils



1					
No.	506152	Ref. No.	0500230		
description	keypad foil dishwasher S200/240				




# control panel




# solenoid valves

# solenoid valves (water)









# ROBERTS HAW/INVENSYS

medium temperature:  $90^{\circ}\text{C}$   $90^{\circ}\text{C}$   $60^{\circ}\text{C}$  ambient temperature:  $60^{\circ}\text{C}$   $25^{\circ}\text{C}$   $60^{\circ}\text{C}$  duty cycle:  $40^{\circ}\text{M}$   $100^{\circ}\text{M}$ 



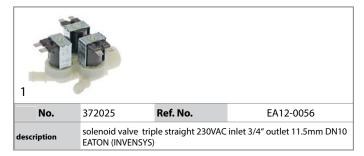


RPE						
reducers	reducers					
outlet side	2					
1						
No.	371247	Ref. No.	EA12-0303			
description	reducer RPE flow rate 1-1.25I/min white					







accessories for	370017					
	No.	371237	Ref. No.	_		
	reducer TP flow	rate 2.5l/min yello	w tolerance ±25%	)		
	No.	371238	Ref. No.	_		
	reducer TP flow rate 3.4l/min dark green tolerance ±25%					
	No.	371239	Ref. No.	_		
	reducer TP flow	rate 5l/min black t	olerance ±25%			
	No.	371240	Ref. No.	_		
	reducer TP flow	rate 8l/min blue to	olerance ±20%			

various			
1			
No.	370241	Ref. No.	0301149
description	solenoid valve 2-fo Lamber	old, with reducer st	raight 230VAC suitable for





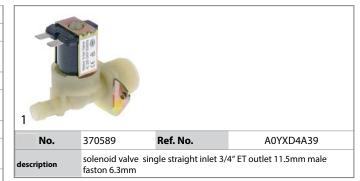

# metal

# BÜRKERT

#### solenoid valves (various)



No.	370544	Ref. No.	0300173
	solenoid valve 2-w BÜRKERT membrai		2" outlet 1/2" L 65mm DN 13mm

# SIRAI

### 2-wav

# L180-B series



description	solenoid valve 2-ways 24VAC connection 3/4" L 79mm DN 18mm -10 up to +90°C coil type Z610A membranes NBR (water) p max 12bar p min 0.35bar				
accessories for	370391				
	No.	371091	Ref. No.	_	
	power socket plug type DIN 43650B cable lengthmm small				

0300070

Ref. No.





# solenoid valves (refrigeration)

# CASTEL



No.	370588	Ref. No.	PELV457
lescription		, ·	V connection 1/4" soldering refrigeration straight



'		1.2	
No.	371142	Ref. No.	133009
description	reducer for solen	oid valve ø 8.2mm	


# pressure switches

# ø 58mm with male faston 6.3mm

# with connection horizontal



No.	541842	Ref. No.	0301503
description		9	40mbar connection 6mm ø Il warewashing pressure con-

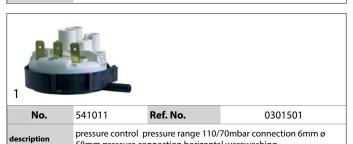



58mm pressure connection horizontal warewashing





connection ø 6mm

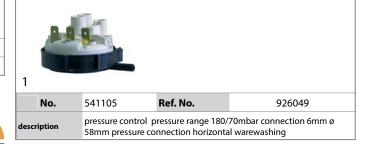

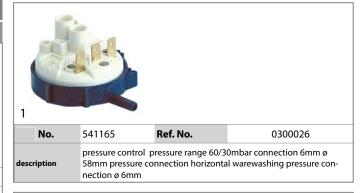





# for steam control



tion 1/4" 250V 8A p max 1bar pressure connection 1/4"

pressure control ø 45mm kettle pressure range up to 1.0bar connec-

# electrodes

description



# compressors

# ACC/ZEL

# R134A

description

## LBP monophase

Lower evaporation temperature below -20°C

183mmWWWWWWWWW ZEL



LBPkg 1/4HP power input 158W cylinder capacity 7.5cm<sup>3</sup> RSIR H

# EMBRACO / ASPERA

# R134A

# LBP monophase

Lower evaporation temperature below -20°C



# HMBP monophase

description

High/Medium evaporation temperature above -20/-15 ℃

compressor coolant R134a type FF 8.5HBK 220-240V 50Hz LMBP



cylinder capacity 7.95cm<sup>3</sup>

No.	605244	Ref. No.	GN1410TN.11
description	10.8kg 1/3HP cylin	der capacity 11.150	2HBK 220-240V 50Hz HMBP m³ CSIR H 180mm 223W 304W W 1471W test method EN



# L'UNITE HERMETIQUE / TECUMSEH

# R134A

# HMBP monophase

High/Medium evaporation temperature above -20/-15 ℃



No.	605159	Ref. No.	PCOM529
description	9.7kg 1/4HP powe		130Y-FZ1A 220-240V 50Hz HMBP apacity 8cm <sup>3</sup> CSIR H 200mmWW 1127W



No.	605188	Ref. No.	PCOM424
description		er capacity 10.33cn	140Y-FZ 220-240V 50Hz HMBP n <sup>3</sup> CSIR H 200mmWWW 399W



# R404A

# LBP monophase

Lower evaporation temperature below -20°C



# evaporation and condensing trays

# evaporation trays heated



# fans

# axial fans

# import

No.	601909¹	Ref. No.	ZA21-0007
escription		W 119mm H 38mr	m 220-240 50/60Hz 31/29W

with ball bearings





No.	601604 <sup>1</sup>	Ref. No.	PR-C153-057 PR-C200-057 RC0011 S900.34
description	bearing slide beari	ng manuf. no. AA1. ø 110mm tempre	m 230VAC 50/60Hz 17/15W 282HS-AT connection cable sist. 70°C input current 0.1A

## with slide bearings



No.	601510 <sup>1</sup>	Ref. No.	PFC523 PFC524
description			n 230VAC 50/60Hz 22/21W beaton 6.3mm SUNON tempresist.

### with ball bearings



No.	601055¹	Ref. No.	GN21	00TN.35
description	axial fan L 92mm W 92mm H 25mm 230VAC 50/60Hz 14.5/14W bearing ball bearing connection male faston 2.8mm metal ADDA fan wheel ø 85mm tempresist. 70°C			
accessories for	601055			
	No.	550898	Ref. No.	_
	connecting cable cable length 2000mm connection F 2.8 connection distance 7.9mm for axial flow fan			
<b>*</b>	No.	691103	Ref. No.	_
	guard ø 90mm	mounting distance	83mm for axial fa	ın 92mm

<sup>1</sup>with ball bearings

# refrigeration fans

# refrigeration motors universal

### ebm-papst

#### miscellaneou:



No.	601783	Ref. No.		50TN.34 00.37
description	fan motor 10W 230V 50/60Hz L3 87mm W 67mm cable length 400mm 1300rpm ebm-papst M4Q045-CA03-51/C18 3 mounting options bearing slide bearing for refrigerated counters			
pare parts for	601783			
	No.	601413	Ref. No.	_
9	fixing plate suitable for fanwheel ED ø 32mm shaft ø 7 mounting distance 26mm			
ccessories for	601783			
K	No.	601385	Ref. No.	_
	fan wheel sucking ø 172mm fan wheel mounting 25.4mm blade angle 34° W 42mm aluminium			

# ELCO

### N series - standard



No.	601966¹	Ref. No.	PR-C1	153-068
description	fan motor ELCO 18W 230V 50/60Hz bearing slide bearing L1 91mm L2 83mm L3mm W 83mm cable lengthmm 1300/1550rpm 5 moun- ting options VNT18-30/517			
accessories for	601966			
	No.	601892	Ref. No.	_
0	connector cable ELCO cable length 1500mm 0.75mm <sup>2</sup> protection IP42 for Plug-In			

¹with coded connector





# IMPORT multi fit fan motors W WEIGURAG HOTOIS A FARS


No. 601022 Ref. No. PEM406


fan motor 10W 230V 50-60Hz L1 44mm L2 54mm L3 85mm W 84mm cable length 500mm 1300rpm YZF10-20-18/26 5 mounting options bearing slide bearing



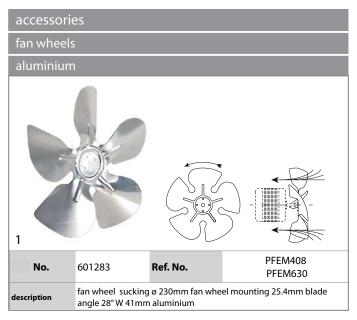

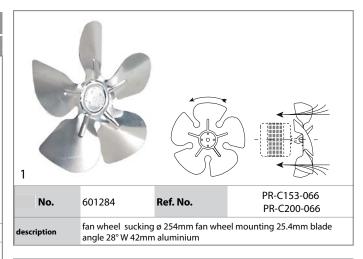

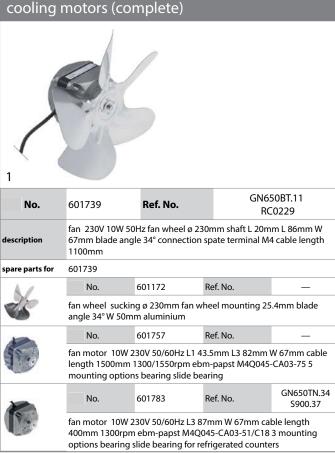







## hot air motors



No.	601690	Ref. No.	010578043
description	fan motor 230V 50	0Hz 0.09kW 2450rp	m L1 80mm L2 20mm L3 35mm
aescription	14 20mm D1 ø 12r	nm D2 ø 8x6mm M	5

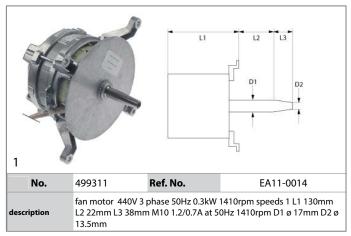








### hot air fan

# miscellaneous





No.	601125	Ref. No.	(	A036410	
description	hot air fan 220-240V 45W 50/60Hz L1 70mm L2 11mm L3 25mm L4 87mm fan wheel ø 150mm FIME type C30R0479CLF				
accessories for	601125	601125			
	No.	550879	Ref. No.	_	
	insulation ø 1	insulation ø 130mm thickness 3mm hole ø 20mm for hot air fan			





# speed controllers



length external size 145mm width external size 115mm D 125mm

# motors

description

# gear motors

# for ovens

# for flues




wall-mounted version

EA11-0012 gear motor FIBER type P245J01C128 230V voltage AC 50Hz shaft ø description 6.3mm L 71.5mm W 56.5mm H 46.5mm motor type M51BJ0L0000/

# for dishwashers 601861 No. Ref. No. 927105 gear motor FIR type 71-B5 180W 400V voltage AC 50/60Hz 3 phase 900/1100rpm shaft ø 14mm L 227mm for transport system without description

# motors

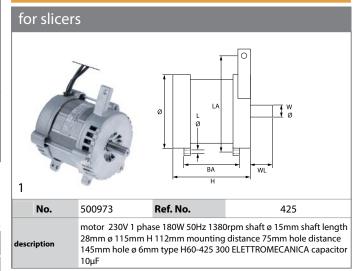






# Universal No. 500471 Ref. No. 8300530 motor 1100W 400V 50/60Hz 3 phase shaft ø 19mm flange ø 120mm 1370/1700rpm type AT80C4 ø 160mm H 200mm L 250mm Lafert











# pumps



532490

O-ring EPDM thickness 2.62mm ID ø 72.69mm Qty 1 pcs

Ref. No.



# **EBARA** pumps 499007 Ref. No. 0301249 No. pump inlet ø 63mm outlet ø 63mm type DWO150 230/400V 50Hz 3 description phase 1.1kW 1.5HP L 360mm EBARA

1					
No.	500357	Ref. No.	030	01254	
description	pump inlet ø 63mm outlet ø 63mm type DWO150 230/400V 50Hz 3 phase 1.1kW 1.5HP L 360mm rotation direction left EBARA inlet ø 63mm outlet ø 63mm				
spare parts for	500357				
	No.	503147	Ref. No.	_	
	pump cover gask	et thickness 3.53	mm ID ø 148.8mm	Qty 1 pcs	
	No.	503148	Ref. No.	_	
80	mechanical shaft seal for shaft ø 18mm height counter ring 12.5mm ID ø 18.5mm ED ø 32mm H 31mm mounting ø 33mm int. ø 1 19mm				
( 100	No.	521270	Ref. No.	_	
		impellor ø 88mm H 24mm with flute shaft intake ø 13mm rotation direction left blades 6 stainless steel			









No.	500570	Ref. No.	75	5175	
description		pump inlet ø 63mm outlet ø 47mm type 422512725 230/400V 50Hz 3 phase 1.1kW 1.5HP L 285mm rotation direction right FIR			
spare parts for	500570				
	No.	510693	Ref. No.	141002 80121	
90	mechanical shaft seal for shaft ø 12mm slide ringext. ø 24mm slide ring H 15.5mm slide ring int. ø 11mm counter ring mounting ø 24n height counter ring 8mm counter ring int. ø 13.5mm				
	No.	521082	Ref. No.	80881	
	impellor ø 96mm H 32mm rotation direction right thread M8L				
	No.	521513	Ref. No.	_	
	pump cover FIR inlet ø 63mm outlet ø 47mm turn direction right ID 150mm inner hight 32mm				
	No.	524416	Ref. No.	80120	
	pump cover gasket thickness 4x4mm Qty 1 pcs				



description	pump inlet ø 63mm outlet ø 47mm type 5295.5050 230/400V 50Hz 3 phase 1.5kW L 300mm rotation direction right FIR			
spare parts for	499280			
-	No.	502277	Ref. No.	80119
	impellor ø 111mm H 31mm thread M8L			
	No.	510693	Ref. No.	141002 80121
90	mechanical shaft	seal for shaft ø 1	2mm slide ringext	. ø 24mm slide

height counter ring 8mm counter ring int. ø 13.5mm

spare parts for	499280				
	No.	521022	Ref. No.	_	
	fanwheel cover ID ø 137mm ED ø 142mm H 70mm for wash pump				
	No.	524416	Ref. No.	80120	
$\bigcirc$	pump cover gasket thickness 4x4mm Qty 1 pcs				
and an	No.	698773	Ref. No.	_	
	pump cover inlet ø 63mm outlet ø 47mm turn direction right ø 194mm ID ø 158mm				









threaded ring LGB pump type LA50 ø 120mm ID ø 70mm








1		PH		
No.	500361	Ref. No.	80	)112
description			n type ZF400SX 23 tion right capacite	
spare parts for	500361			
	No.	365021	Ref. No.	_
6	operating capacitor capacity 16µF 425V tolerance 5% 50/60Hz amb ent temperature max25 to +85°C Ø 35mm L 73mm single M8 plast connection male faston 6.3mm 416.10.99 protection			single M8 plastic
	No.	509020	Ref. No.	124031
	impellor ø 104mm H 25mm M8L			
	No.	510703	Ref. No.	_
90	mechanical shaft counter ring 5.5n		3mm slide ring H	13mm height
	No.	521547	Ref. No.	116013
	pump cover LGB inlet ø 60mm outlet ø 50mm supporting pressu M8 turn direction right ø 160mm ID ø 127mm inner hight 36mm			J 1
	No.	532623	Ref. No.	80844
	O-ring EPDM thi	ckness 2.62mm ID	ø 120.32mm Qty	1 pcs



No.	499282	Ref. No.	77	7553	
description	pump inlet ø 60mm outlet ø 49mm type ZF400VSX 220-230/380- 400V 50Hz 3 phase 0.7kW L 270mm rotation direction right LGB				
spare parts for	499282	499282			
	No.	502279	Ref. No.	_	
	impellor H 31mm ED ø 100mm blades 6				
	No.	510702	Ref. No.	_	
9	mechanical shaft seal height counter ring 5 5 mm ID 4 12 mm				

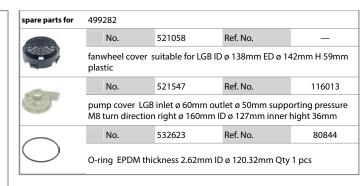

# booster pumps I









# drain pumps








# booster pumps II






# condensators & interference suppression filters

# operating capacitors


















# interference suppression filters

No. 365046 Ref. No. 0300900


interference suppression filter type 1057E-G1474253105-Q 115/250V 50/60Hz conductor 2 with E connection male faston 6.3mm L 40mm ø 40mm Hmm Wmm M8 plastic Qty 1 pcs

line filte	rs				
with hou	with housing				
No.	403358	Ref. No.	EA13-0057		
description	line filter type FC61113 400V 50-60Hz three-phase connection cable cable length 500mm mounting DIN rail				



# fuses


# The fuses No. 358677 Ref. No. 228004 228010 description fine fuse size ø5x20mm 4A fast-acting rated 250V Qty 10 pcs





description






# fine fuse holders No. 551234 Ref. No. 210010


fuse holder suitable fuse ø5x20mm 1-pole 6.3A rated 600V L 52mm


W 8mm H 51mm connection screw clamp cross section 4mm<sup>2</sup>





1			
No.	550519	Ref. No.	H.228048
description	cover plate suitable fuseA ratedV connection for fuse holder		

# line circuit breakers

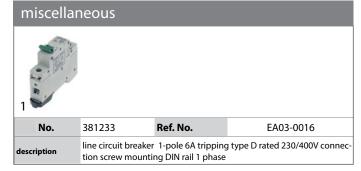



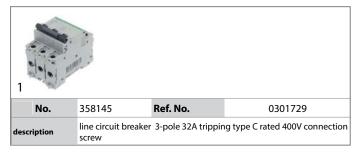





# electric accessories

# cables

power supply cables				
		//		
No.	551085	Ref. No.	9171	
description		cable CEE7/7 type E+F 3-pole contacts P+N+E 1.5mm <sup>2</sup> max. 16A max 230V 2m with plug H05VV-F 3G1.5		







# ribbon cables group 1 No. 403250 Ref. No. 80933 description ribbon cable 10-pole L 3000mm plug type coded 2 row plug: number of poles 10

1			
No.	400902	Ref. No.	80934
description	ribbon cable 10-p	ole L 750mm plug t	type FC-10P raster size 2.54mm

1				
No.	400339	Ref. No.	PKAL465	
description	ribbon cable 16-pole L 460mm plug type 2 row Qty 1m			

# No. 550774 Ref. No. T113075 description cable harness

miscellaneous				
1				
No.	550773	Ref. No.	T113036	
description	connecting cabl	e L 1.9m		

## terminals

# connection terminals with screw/faston connections




No.	550411	Ref. No.	220011 65.51785		
description	power terminal block 6-pole max. 40A max 450V connection ø6mm / F6.3 tempresist. 150°C cross section 6mm²				


# connection terminals with screw connection



No.	551109	Ref. No.	A01506752
description	connecting cable tempresist. 150°C	ax 500V connection screw	

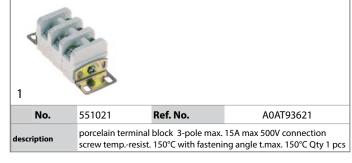













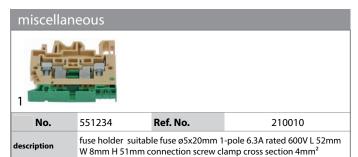

# terminal boxes




# DIN rails



# gas taps

# **COPRECI**

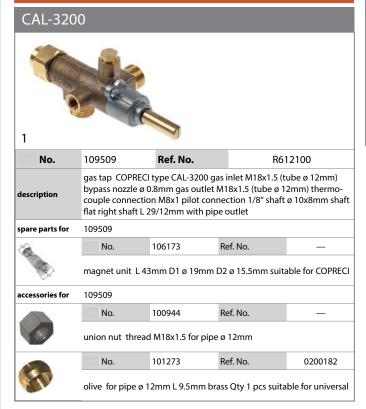







# gas thermostats

# 710 Minisit series



No.	101435	Ref. No.	U134316
description	1/2" gas outlet 3/8 M10x1 probe ø 4m	" thermocouple co nm probe L 72mm c	t.max. 340°C 100-340°C gas inlet nnection M9x1 pilot connection apillary pipe 1050mm probe ressure regulatormbar gland nut
spare parts for	101435		

101053

spare parts for	101433
6	No.

6					
7	ij	2	8		
	1	η	Ž	ĝ	
		-	-		

magnet unit T1: M9x1 T2: M24x1 L 45mm ø 17mm suitable for Minisit

Ref. No.

U264399

102107 Ref. No.

No. probe 100-340°C probe ø 4mm probe L 72mm capillary pipe 1050mm t.max. 340°C oven/grill probe type type C1 suitable for

101435 accessories for



100809 Ref. No. No.

O-ring EPDM thickness 2mm ID ø 21mm Qty 1 pcs



No. 100904 Ref. No.

locking screw M10x1 for pipe ø 4mm Qty 1 pcs



100905 Ref. No.



locking screw M10x1 for pipe ø 6mm Qty 1 pcs



101054 Ref. No. magnet unit T1: M10x1 T2: M24x1 L 45mm ø 17mm suitable for



Minisit No. 101136 Ref. No.



piezoelectric igniter suitable for Minisit with cover cap ømm connec-



101137 U134318

Ref. No.



cover cap without piezoelectric igniter

101267



reducer IT 3/8" ET 1/2" L 21mm



101268 Ref. No. U264300



gas connection thread 3/8" angled with O-ring MINISIT 710



101269 Ref. No. gas connection thread 1/2" angled with O-ring MINISIT 710



No. 101270 Ref. No.

Ref. No.




screw connection IT 3/8" ET 3/8" L 28mm 101272



screw connection IT 1/2" ET 3/8" L 57mm

MAG-PRO	
---------	--

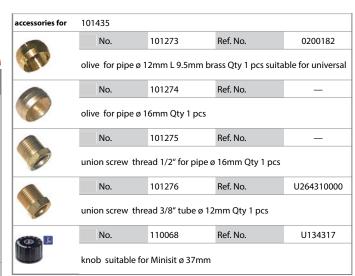



100905

101054

Minisit

locking screw M10x1 for pipe ø 6mm Qty 1 pcs

Ref. No.

Ref. No.


magnet unit T1: M10x1 T2: M24x1 L 45mm ø 17mm suitable for





accessorie	es		
probes			
1		_//	
No.	102102	Ref. No.	U264398
description			e L 68mm capillary pipe be type type B1 suitable for

## COPRECI

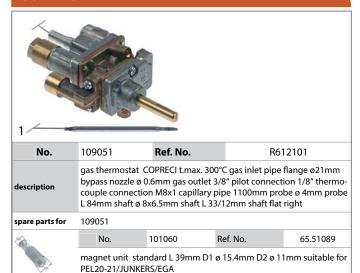



101537

No.

Ref. No.

accessories for	109051			
0	No.	101376	Ref. No.	_
	gasket ID ø 8mm ED ø 12mm H 3/5mm			
	No.	101538	Ref. No.	_
No.	clamp			

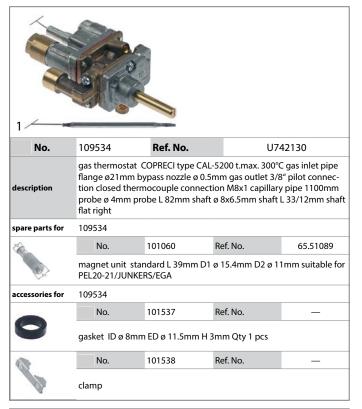

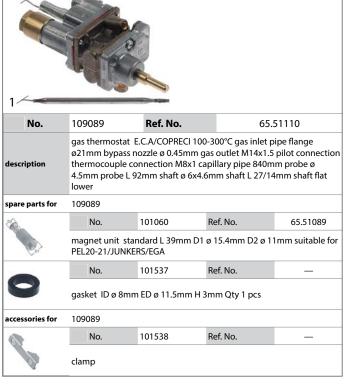





# gas valves and ignition boxes

# gas control valves

# SIT

# **NOVASIT**



1/2" thermocouple ignition pressurem	e connection M9x1 Boar pressure regula ut pilot burner M10	50Hz gas inlet 1/2" gas outle pilot connection M10x1 ator connection blind equiv. 0x1 input pressure max. 60ba	

spare parts for 101908

N	a	A	_		
	Ŋ	6			
	1	0		7	
		7	-	7	
		40	_	-	

101065 Ref. No. magnet unit with cable L 44mm D1 ø 30mm D2 ø 20mm suitable for NOVASIT



101313 Ref. No.

solenoid coil 230V 50Hz

101908

No.



100006 Ref. No. No. piezoelectric igniter suitable for ELETTROSIT body plastic blowing connection ø2.4mm ø 14mm

Ref. No.

Ref. No.

Ref. No.

No.



gas connection straight 1/2" flange 45x45mm ELETTROSIT/ V4400/4600/4605 suitable for SIT/HONEYWELL hole distance 36x36mm

No. 101306

101305

X153004

X163000000



gas connection angled flange 45x45mm hole distance 36x36mm 1/2" ELETTROSIT/V4400/4600/4605 screw with O-ring suitable for SIT/ HONEYWELL



gas connection straight flange 45x45mm hole distance 36x36mm 3/4" ELETTROSIT/V4400/4600/4605 screw with O-ring suitable for SIT/ HONEYWELL



101308 Ref. No.

101307

gas connection angled flange 45x45mm hole distance 36x36mm



3/4" ELETTROSIT/V4400/4600/4605 screw with O-ring suitable for SIT/ HONEYWELL



101312 R275027000 No. Ref. No.

Ref. No.



101314 No.

solenoid coil 24V 50Hz

microswitch



101317 Ref. No. X163008000





plug with cable L 1000mm suitable for NOVASIT




No.


cover cap for solenoid coil suitable for NOVASIT

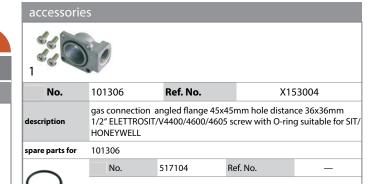



O-ring EPDM thickness 2.62mm ID ø 31.42mm Qty 1 pcs

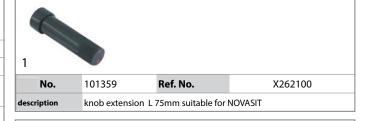







description





# ignition parts

# pilot burners SIT 100 series accessories pilot burner caps 1 No. 100837 Ref. No. X012117000


# pilot burner brackets universal No. 100887 Ref. No. X012114000 description opposite support for pilot burner suitable for 100 series


pilot burner cap 3 flames H 24mm L 48mm Qty 1 pcs

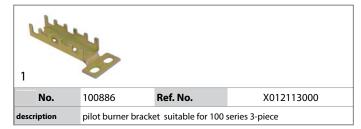

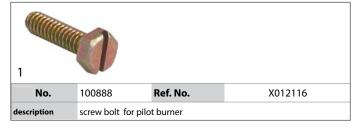

# electrodes

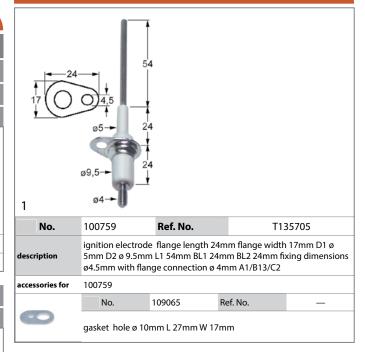




ignition cable cable length 985mm connection ø2.4mm

# ignition units

description








# thermocouples


# plug-in thermocouples

plug-in thermocouples standard

# thermocouples SIT





# plug-in thermocouples with interruption




# threaded thermocouples

threaded thermocouples standard







# gas burners

# hob burners

# accessories

# pan supports





# bar burners

# bar burners




	No.	109020	Ref. No.	T035700
desc	ription	bar burner 2 row L 530mm W 200mm ømm H 45mm chargrill		ømm H 45mm chargrill










gas components






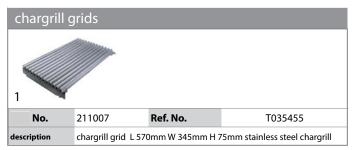







# tube burners



# ring burners



# accessories





No.	109048	Ref. No.	R725052	
description	gasket L 110mm W 110mm H 3.3mm hole ø 81mm graphite			


# nozzle holders



1			
No.	104724	Ref. No.	65.30915
description	nozzle holder		







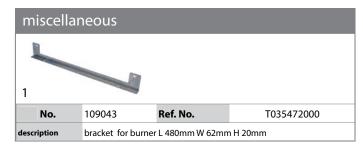

# gas nozzles




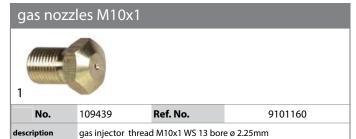


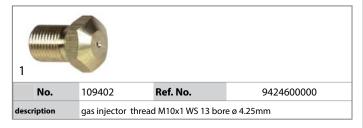


# auxiliary gas parts


# screw connections









# gas lines





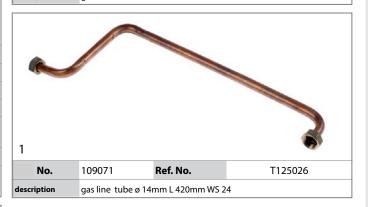



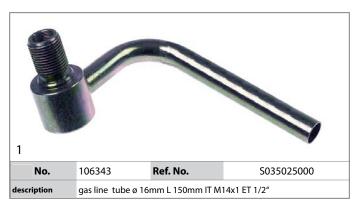



# equipment-specific units









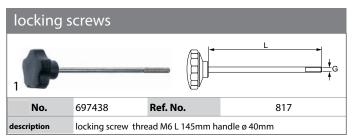





























hand g	uard		
1			
No.	697754	Ref. No.	784
description	hand protection for knife ø 300mm H 125mm W 60mm thickness 1.2mm hole ø 6.5mm mounting distance 84mm stainless steel		























# handles No. 697431 Ref. No. 327 description cone handle thread M6 ø 26mm plastic L 70mm black thread L 10mm






















































## grindstones with hub No. 697421 Ref. No. 641 description grindstone Ø 45mm thickness 8mm bore Ø 6mm grained coarse with bevel, with hub







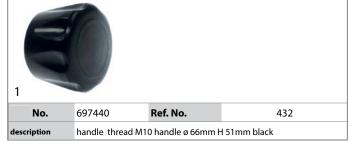







accessories				
1				
No.	698631	Ref. No.	895	
description	spindle for c	spindle for carriage thread M6 L 170mm ø 12mm		















### for vegetable slicers





### for cheese graters



### for dough mixers

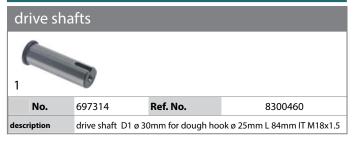

















# roller chains 06B-1 single No. 697127 Ref. No. 8300870 description roller chain DIN/ISO 06 B-1 splitting 3/8" / 9.525mm links 42 internal width 5.72mm rollerø 6.35mm single

### No. 697126 Ref. No. 8300210 description roller chain DIN/ISO 06 B-1 splitting 3/8" / 9.525mm links 63 internal width 5.72mm rollerø 6.35mm

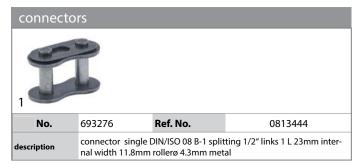


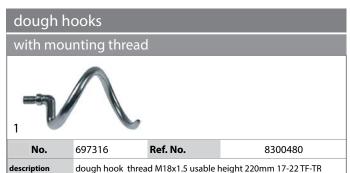










































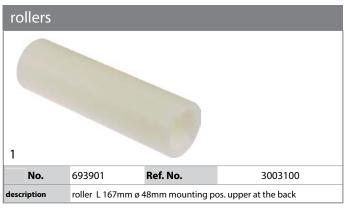

























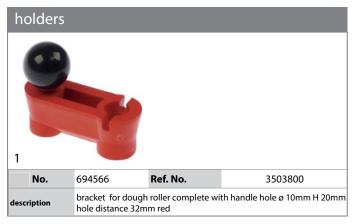











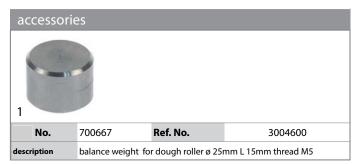

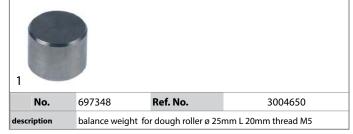



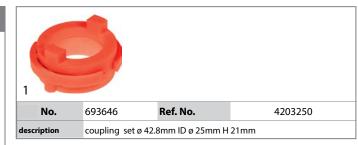












¹double











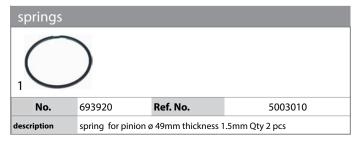

































































1=	-		
No.	697345	Ref. No.	3003700
description	screw for lever L 37mm		


































for espre	for espresso machines				
brewing	brewing units				
filter hold	filter holder gaskets				
O-rings					
No.	510409	Ref. No.	0200041		
description	O-ring EPDM thic	kness 5.34mm ID ø	56.52mm Qty 1 pcs		

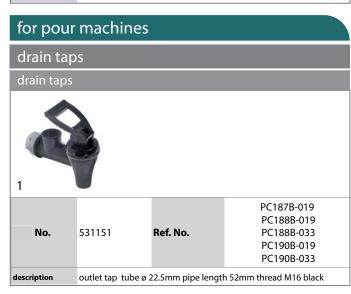







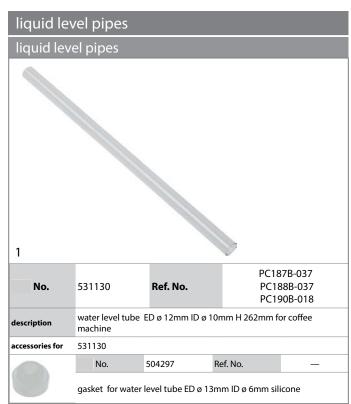


















### for griddles
















### front panels




'						
No.	694702 <b>Ref. No.</b> AC21-1205/S/CH1					
description	front panel for combi-steamer L 700mm W 190mm H 60mm SS with accessories RETIGO for touch screen					
accessories for	694702	694702				
	No.	360594	Ref. No.	EA05-0052		
	USB cable A	USB cable A mounting screw mounting bush 1.5m				
100	No.	360607	Ref. No.	SP21-0001		
400	USB cover plastic A mounting screw mounting bush grey					
	No.	404013	Ref. No.	XC10-2000		
1		oi-steamer Blue Fr ETIGO model XC1		0mm W 130mm ntrol H 50mm type		

# cleaning system nozzles No. 694682 Ref. No. AT32-0052 description nozzle hole Ø 6.45mm H 17.8mm metal ED Ø 52mm ID Ø 44.6mm

# door mechanics accessories No. 694683 Ref. No. AX03-0076 description stop ø 14mm rubber ID ø 7.5mm H 14mm






















water pipe L 860mm

description

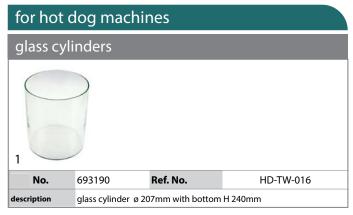







mechanical components, equipment accessories
























1				
No.	700962	Ref. No.	VET	RO005
description	glass panel L 41	5mm W 108mm th	nickness 5mm rect	angular for door
accessories for	700962			
	No.	901400	Ref. No.	GUARN003

window gasket suitable for GGF L 416mm external weith 113mm Qty 1m thickness 2.5mm





### for dishwashers










### **EQUIPMENT-SPECIFIC UNITS AMATIS**




1		1				
No.	510929	Ref. No.	020	00149		
description	salt tank ø 120mm H 117mm hose ø 10mm mounting ø 70mm overall height 157mm					
spare parts for	510929					
	No.	506015	Ref. No.	0200056 456052		
	O-ring EPDM thi	ckness 3.53mm ID	ø 39.69mm Qty 1	pcs		
	No.	510018	Ref. No.	429011		
Q	nut ø 92mm H 1	nut ø 92mm H 10.5mm for salt tank ID ø 64mm				
	No.	524177	Ref. No.	480005		
	lid ø 69mm H 20mm for salt tank ID ø 50mm					
accessories for	510929					
	No.	510071	Ref. No.	437034		
$\circ$	flat gasket rubber ED ø 81mm ID ø 68mm thickness 3mm for salt tank Qty 1 pcs					
	No.	510654	Ref. No.	_		
$\circ$	gasket H 6mm D1 ø 82mm D2 ø 68mm					
	No.	510883	Ref. No.	_		
$\circ$	gasket rubber El Qty 1 pcs	gasket rubber ED ø 86mm ID ø 66mm thickness 2mm for salt tank				



spare parts for	510032			
	No.	510071	Ref. No.	437034
$\circ$	flat gasket $$ rubber ED ø 81 mm ID ø 68 mm thickness 3 mm for salt tank Qty 1 pcs			
	No.	524177	Ref. No.	480005
	lid ø 69mm H 20mm for salt tank ID ø 50mm			

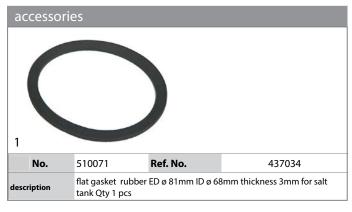









































mechanical components, equipment accessories

# bushes No. 506190 Ref. No. 0800497 description bush for grab handle hood mechanics













1			
No.	506436	Ref. No.	0800116
description	guide bar L 1	115mm ø 31.5mm	


1			
No.	513724	Ref. No.	80068
description	guide bar L 590mm hood mechanics		




























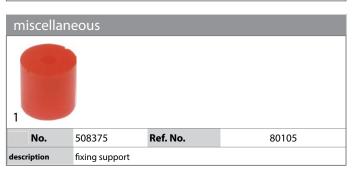










































air traps					
air traps					
1					
No.	506221	Ref. No.		020	1455
description	air trap L 40m	m W 40mm H 8	5mm th	read M12x1.75	ABS plastic
accessories for	506221				
	No.	506063	Re	ef. No.	0200295
0	gasket suitable for Lamber equiv. no. 0200295 air trap ED ø 15.5mm ID ø 11.5mm Nyltite				
	No.	506076	Re	ef. No.	0200638
	hose connecto	or thread M12x1	1.75 hos	se ø 6mm	
	No.	506220	Re	ef. No.	0200196
8	gasket ø 4mm	H 2.5mm nylor	1		
	No.	560227	Re	ef. No.	0800652
	hexagonal nut	thread M3 H 4	mm SS \	WS 5.5 Qty 1 pc	s self-locking




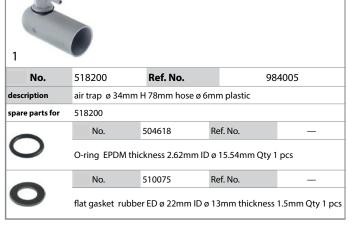












1			
No.	506220	Ref. No.	0200196
description	gasket ø 4mm H 2.5mm nylon		
















1			
No.	506076	Ref. No.	0200638
description	hose connect	hose connector, thread M12x1 75 hose ø 6mm	

mechanics for flight type dishwashers						
1						
No.	524826	Ref. No.	0802051			
description	bush for ratchet	t L 21mm ID ø 8mm I	ED ø 10mm suitable for Lamber			
F-10-20 - 201						
(3)						


1					
No.	524789	Ref. No.	0800492		
description	cable clamp wire gauge ø 5mm SS				



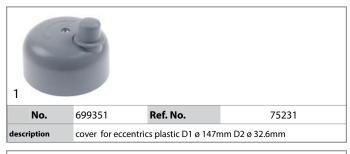


1			
No.	524790	Ref. No.	0802048
description	distance washers for drive shaft H 10mm ID ø 12.4mm ED ø 22mm		






1			
No.	524787	Ref. No.	0802046
description	thread bolt for drive shaft L 62mm ø 12mm suitable for Lamber thread M8x1.25		
















accessories					
1					
No.	511997	Ref. No.	476008		
description	ball for back	ball for back flow restrictor ø 8mm plastic			







1			
No.	698871	Ref. No.	419036
description	spacer for PCB L 18mm W 6mm D1 ø 6mm D2 ø 3mm		


















1		O	
No.	519494	Ref. No.	0800714
description	tension spring ø 9mm wire gauge ø 1.5mm total length 168mm for door		

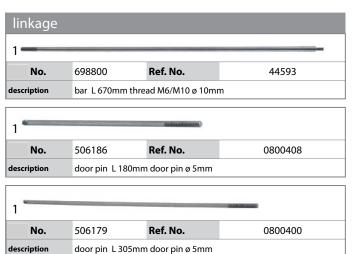

























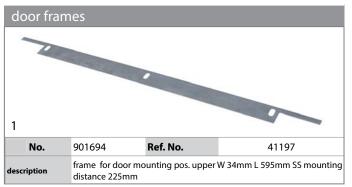







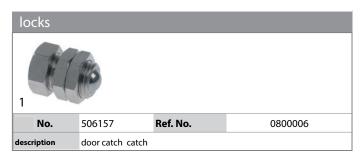




























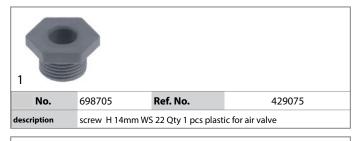


1	The state of the s				
No.	698876	Ref. No.	486078		
description	screw thread	screw thread M6x30mm Qty 1 pcs SS			
















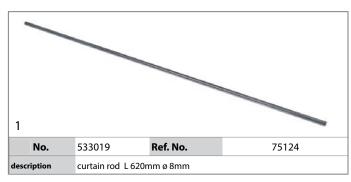


















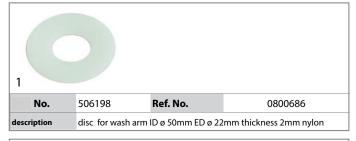














No.	518240	Ref. No.	437078
description	flat gasket rubber ED ø 33mm ID ø 17mm thickness 1.5mm Qty 1 pcs		

	)		
No.	507541	Ref. No.	437102
description	flat gasket rubber FD ø 74mm ID ø 57mm thickness 2mm Oty 1 pcs		

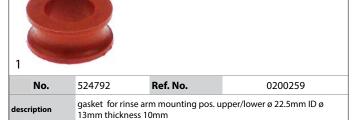









1				
	No.	524258	Ref. No.	0201504
	ption	gasket suitable for Lamber for wash arm support L 100mm W 100mm Qty 1m ID ø 61mm		




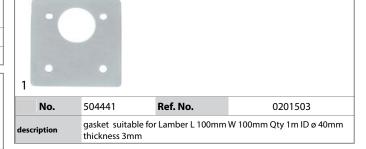



























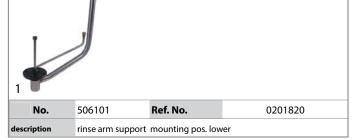














1	- Constitution of the Cons				
No.	506200	Ref. No.	0800712		
description	spring SS for	spring SS for rinse pipe			

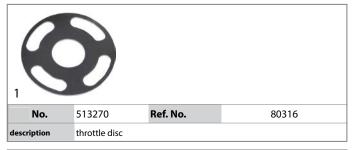





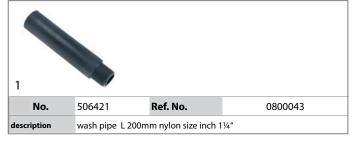

















### knobs


### universal knobs

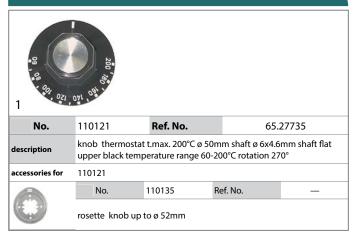

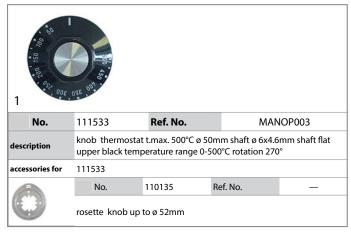








### handles and hand wheels

### cylindrical handles







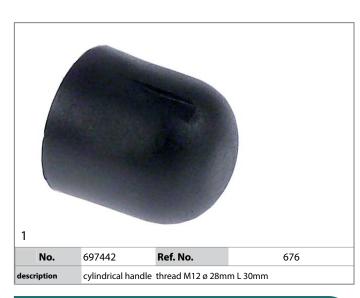

### cone handles











### ball handles







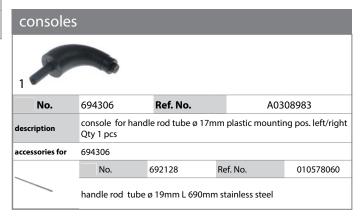





### handle rails No. 508399 Ref. No. 0500017 description Oty 1 pcs

### bracket handles









### folding grill handles




### hinges

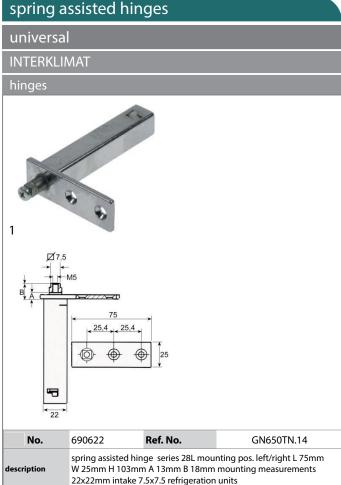










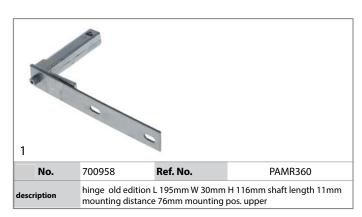



# No. 701380 Ref. No. 0A0YXD4A42 hinge mounting distance 142mm lever length 116mm groove distance 7mm spring thickness 3.5mm mounting ear position L 155mm W 19mm







L 155mm mounting pos. W 22mm

thickness 4mm mounting ear position left/right spring length 55mm

description

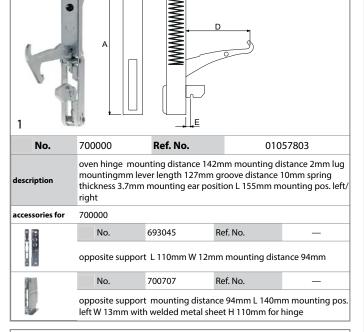










### 1 No. 700975 Ref. No. HF600.19 description bolt L 20mm mounting pos. upper/lower thread M5 ø 7mm for hinge

description	bolt L 20mm	mounting pos. upper/l	ower thread M5 ø 7mm for hing
106			
No.	701257	Ref. No.	\$900.06
description	bolt L 25mm mounting pos. upper thread M5 ø 7mm complete for door hinge Qty 1 pcs		

















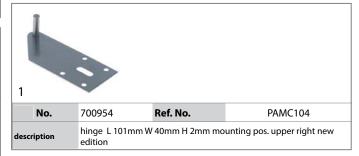



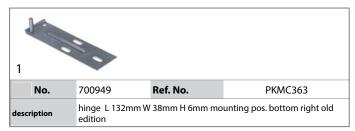


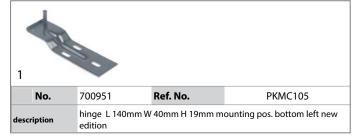

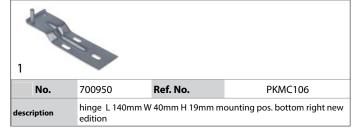
























### miscellaneous



### pullouts




### fittings for catering equipment

# outlet taps universal No. 697834 Ref. No. A040576 description cone handle thread M6x1 ø 13mm plastic L 53mm black thread L 6mm






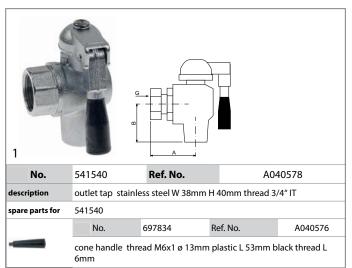





### aerators and air bleeders

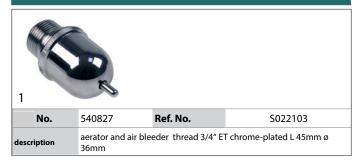



### filters




### equipment feet and end caps

### equipment feet


### with screw mounting




No.	701309	Ref. No.	AA00-0026
description	equipment foot tu SS size 2" Qty 1 pcs		M10 thread Lmm H 86-110mm












### screw-in feet





No.	700966	Ref. No.	A038973	
description	equipment foot thread L 20mm ø 37mm H 20mm Qty 1 pcs			






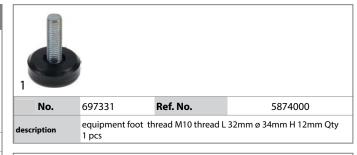





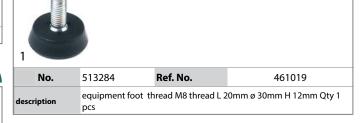

### bolting feet

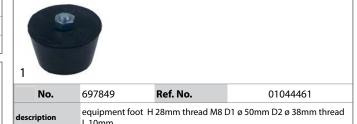

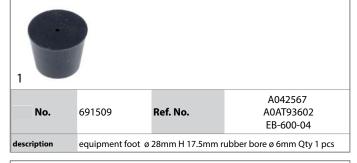






### 0

### **EQUIPMENT FEET AND END CAPS AMATIS**

### equipment feet with stem



### miscellaneous

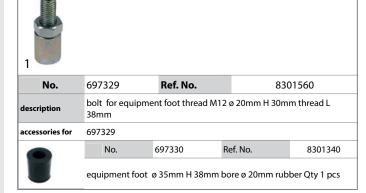


### miscellaneous

### with fixing plate

### ø100mm




No.	700960	Ref. No.	PRRW609
description	plate size 105x85m	nm hole distance 79	ousing chrome-plated steel Omm capacity 80kg bearing VC H 125mm wheel width





with swivel brake



with spig	with spigot						
ø75mm	ø75mm						
1							
No.	700206	Ref. No.	8301580				
description	thread L 30mm thr	read ø M12x1.5mm ly polyamide tread	lt housing chrome-plated steel capacity 100kg bearing ball PVC H 100mm wheel width				




<sup>1</sup>with swivel brake





### 0

### baskets


### crumb screens









### shelves and shelf rails

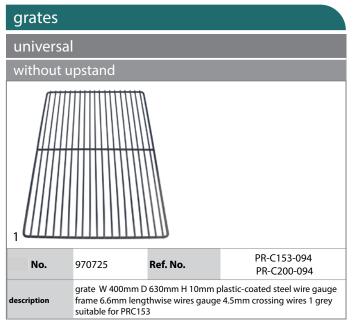





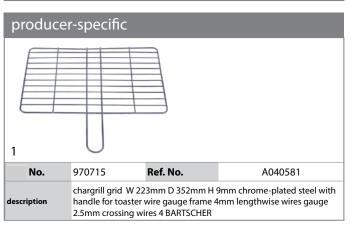






### grid attachments






## 1 No. 700937 Ref. No. 3400000090074 PPXM074 description guide U-shape L 508mm W 12mm mounting pos. right/left inner hight 19mm






### shelf rails and supports






### gaskets








### profile 9796


### We offer custom-made gaskets for this profile




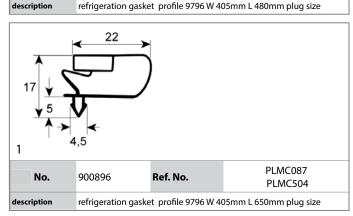















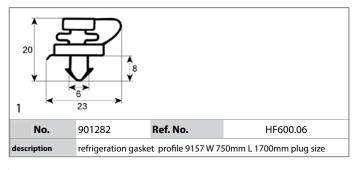

















# door seals with fixing hook No. 901178 Ref. No. 010578049 description door seal L 330mm W 680mm with 12 holes type series until 03/2013




<sup>&</sup>lt;sup>1</sup>3-sided, long side open




1	4	)	
No.	901961	Ref. No.	65.111008
description oven gasket L		L 220mm Wmm with 2	mounting clips
















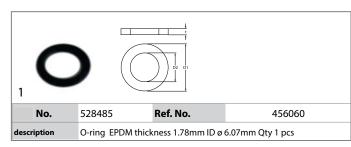





































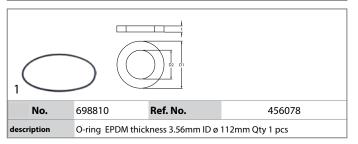

















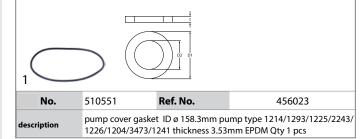


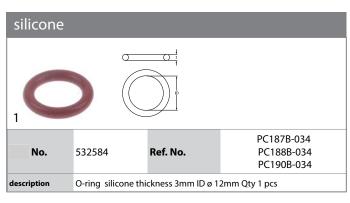






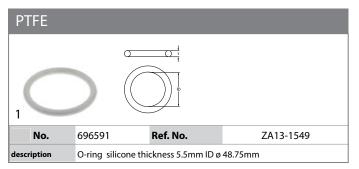













No.	510164	Ref. No.	Q306052000
description	flat gasket fib	re ED ø 24mm ID ø 16m	ım thickness 3mm Qty 1 pcs






rubber gaskets						
No.	519547	Ref. No.	437041			
description flat gasket rubber ED ø 14.4mm ID ø 15.5mm thickness 2mm Qty pcs size 3/4"						





No.	505397	Ref. No.	437083	
description	flat gasket rubber ED ø 32mm ID ø 19.5mm thickness 1.5mm Qty 1 pcs			















No.	506121	Ref. No.	0201524
description	I mm thickness 2mm Qty 1 pcs		
























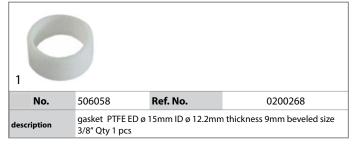


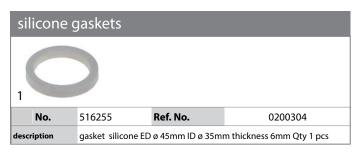






























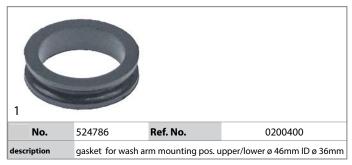

















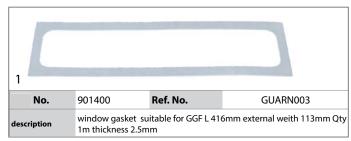







### refrigeration cycle components













1					
No.	750291	Ref. No.	PFLR419		
description	dryer size 50g 3: 6.4	dryer size 50g ø 24mm L 373mm connection 2.4/4.8mm connection 3: 6.4			



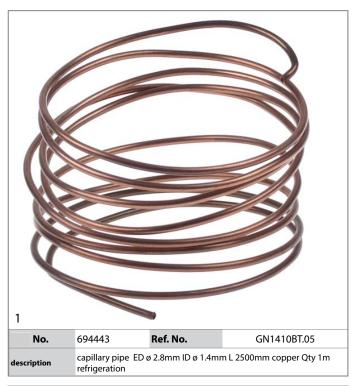













### evaporators

### for fridges














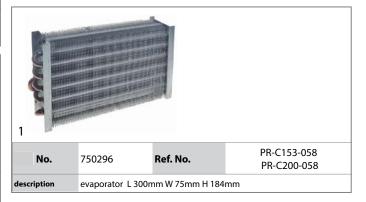













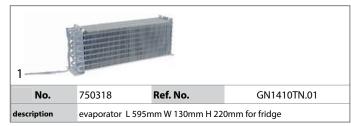





### for saladettes

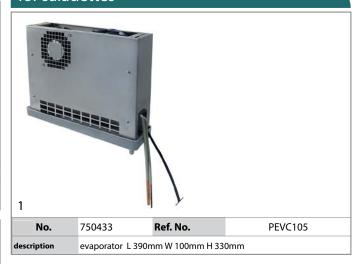





### accessories




### condensors









### condensors

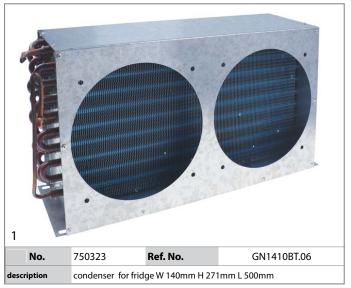

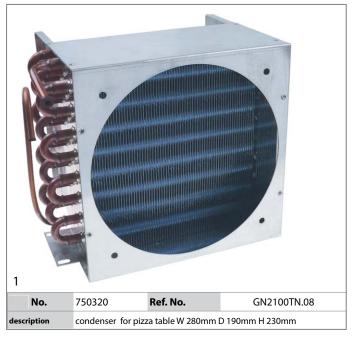




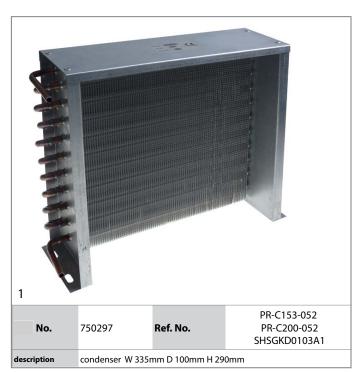

### transmission technology and ball bearings

### ball bearings





No.	523551	Ref. No.	0802500	
description	deep-groove ball bearing type 6003-2RS shaft ø 17mm ED ø 35mm W 10mm with sealing discs deep-groove ball bearing DIN 625-1			


















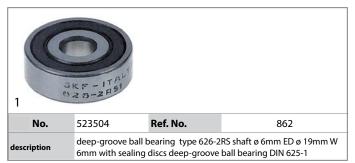


## No. 523508 Ref. No. 5093000 description deep-groove ball bearing shaft ø 10mm ED ø 30mm W 9mm type 6200-2Z DIN 625-1


















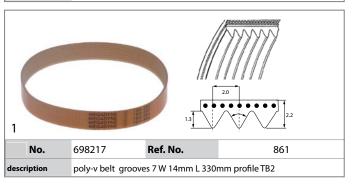








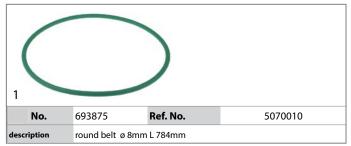



### chains

roller cha	roller chains 04B-1 single					
1 600000	10000000					
No.	A039870					
description	chain DIN/ISO 04 B-1 splitting 6mm links 58 L 365mm internal width 2.8mm rollerø 4mm single					

roller chains 06B-1 single						
	1 ADDRESS OF THE PROPERTY					
No.	697127	Ref. No.	8300870			
description roller chain DIN/ISO 06 B-1 splitting 3/8" / 9.525mm links 42 internal width 5.72mm roller ø 6.35mm single						

/		7	
No.	697126	Ref. No.	8300210
description		IN/ISO 06 B-1 splitting n rollerø 6.35mm	3/8" / 9.525mm links 63 internal


roller chains 08B-1 single					
1 Фоловонализация					
No.	697854 <b>Ref. No.</b> 0800081				
description	roller chain DIN/ISO 08 B-1 splitting 1/2" / 12.7mm links 90 L 226mm internal width 7.75mm rollerø 8.51mm single				
accessories for	697854				
	No.	693276	Ref. No.	0813444	
	connector single DIN/ISO 08 B-1 splitting 1/2" links 1 L 23mm internal width 11.8mm rollerø 4.3mm metal				





### springs


### No. 693789 Ref. No. 4000500 spring Ø 12mm L2 70mm mounting pos. in the front/at the back wire gauge Ø 1.5mm P30-P40 L1 3mm L3mm Qty 1 pcs

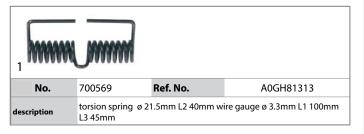







### Tho. 696750 Ref. No. CMT13 description compression spring Ø 20mm L 89.5mm wire gauge Ø 2mm windings 14 zinc-coated steel



### spring compressors





### gas tension springs

gas tension springs					
1-	_	•			
No.	701299	Ref. No.	35070		
description		pring 50N hub 150mm [	D1 ø 15mm D2 ø 6mm hole		

### roller springs






### tension springs

1	(40)Heects (10)			
No.	701154	Ref. No.	449063	
description	tension spring ø 10.5mm total length 200mm wire gauge ø 1.3mm for door mechanism			



1 -			
No.	697349	Ref. No.	PF08650
description tension spring ø 20mm wire gauge ø 3mm L1 125mm L2 55mm			






1			
No.	517451	Ref. No.	35020
description	tension sprin	g ø8mm total length 1.	50mm wire gauge ø 1mm Qty


### kitchen accessories

### gastronorm






### manometers



### hose reels and spray guns





spray gun for appliances 3/8" IT L 135mm



### dosing pumps

### peristaltic dosing pumps

### **SEKO**

description

### built-in version

### with frequency control



No.	361767 <sup>1</sup>	Ref. No.	20	9021		
description	dosing pump SEKO 3I/h 230VAC detergent hose ø 4x6mm hose type K hose Santoprene suction level 1.5m type NBR 3 8W built-in version peristaltic pump					
spare parts for	361767					
	No.	361815	Ref. No.	_		
-	pump hose detergent hose ø 6x10mm hose ø 4x6mm hose type K hose Santoprene type SEKO					

incl. inlet and conveyor hose





### piston pumps

### spare parts



1			
No.	510298	Ref. No.	0200425
description	lip valve dosing p	oump suitable for Di	B2/DS5

### membrane dosing pumps

### self-priming

### LANG



1						
No.	361221	Ref. No.		0500057		
description		dosing pump type N6 rinse aid pressure connection ø 4x6mm suction connection ø 6x8mm LANG				
spare parts for	361221	361221				
On	No.	361079	Ref. No.	_		
spring for type N5/N6 for ball						
	No.	361080	Ref. No.	_		
O-ring EPDM thickness 2mm ID ø 16mm Qty 1 pcs						

Table continues overleaf








	361221					
	No.	361085	Ref. No.	_		
O	O-ring EPDN	A thickness 2mm	ID ø 8mm Qty 1 pcs			
	No.	361309	Ref. No.	_		
	ball for type	N5/N6				
<u> </u>	No.	361310	Ref. No.	_		
	bracket for t	ype N6 ball guide				
	No.	361311	Ref. No.	_		
0	O-ring EPDM thickness 2mm ID ø 6mm Qty 1 pcs for type N6					
	No.	361314	Ref. No.	_		
	valve ring for type N6 holder for O-ring					
	No.	361317	Ref. No.	_		
	sealing disc for type N6					
	No.	361886	Ref. No.	_		
90	non-return valve inletmm outletmm outlet ø 12.4mm L 12.7mm					
	No.	505228	Ref. No.	_		

SEKO					
1					
No.	361364 <sup>1</sup>	Ref. No.	20	9025	
description		onnection ø 4x6n	ing rinse aid pum nm suction connec		
spare parts for	361364				
	No.	361301	Ref. No.	_	
	hose connector for type DIB3E/DIB5E				
	No.	361302	Ref. No.	_	
0	valve bush for type DIB3E/DIB5E				
	No.	361304	Ref. No.	_	
$\circ$	O-ring EPDM ID DIB3E/DIB5E	ø 11.11mm thickr	ness 1.78mm Qty 1	pcs for type	
	No.	361305	Ref. No.	_	
	valve disc for typ	oe DIB3E/DIB5E DI	B3P/DIB5P		
	No.	361306	Ref. No.	_	
	membrane for ty	/pe DIB3E/DIB5E @	9 49mm hole ø 5m	ım	
	No.	361307	Ref. No.	_	
	membrane dosi	ng pump ø 68mm	n hole ø 6mm for t	ype DIB3P/DIB5P	

spare parts for 361364 361459 Ref. No. No. hose connector  $\,\emptyset\,6mm$  for dosing pump No. 361481 Ref. No. lip valve for type DIB3P/DIB5P DIB3E/DIB5E 361364 accessories for 361240 Ref. No. No. hose connector 1-way hose ø 6mm plastic connection M10x1 361241 Ref. No. No. hose connector 1-way hose ø 9mm plastic connection M10x1

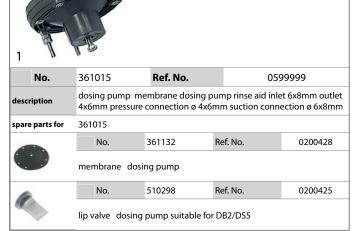






¹auxiliary pressure connection closed








## self-priming with supporting pressure ELETTROBAR 1 No. 510298 Ref. No. 0200425 description lip valve dosing pump suitable for DB2/DS5

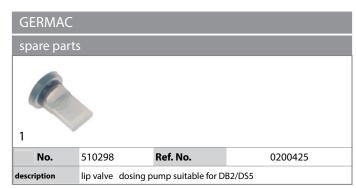







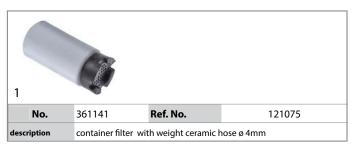
















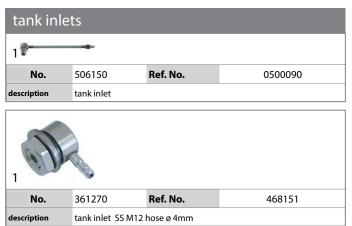



### hoses






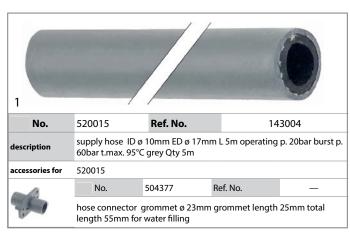

































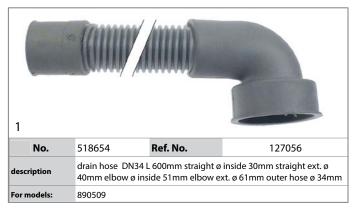






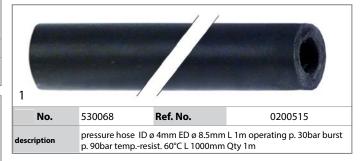





Table continues overleaf













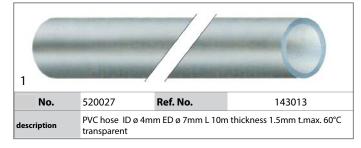

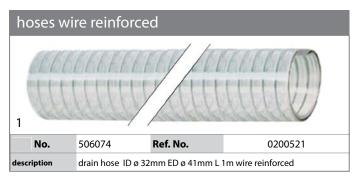



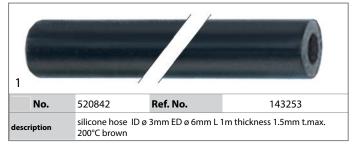























form L			
1	and the same of th		
No.	513299	Ref. No.	127090
description		piece A ext. ø 18mn ce B 10mm L 435mi	n end piece A int. ø 10mm AD2 m






















































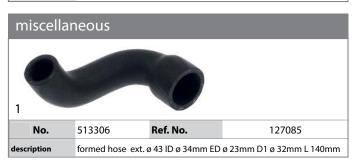











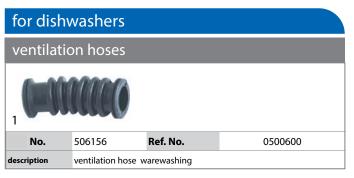





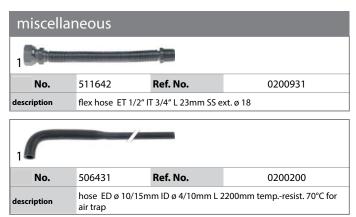

### fittings, hose and pipe connectors














### hose connectors









### **AMATIS** FITTINGS, HOSE AND PIPE CONNECTORS/VALVES AND TANK INLETS







## nickel-plated brass No. 520202 Ref. No. 927015 description hose connector nickel-plated brass straight thread 3/8" hose ø 12mm Qty 1 pcs







### producer-specific No. 506082 Ref. No. 0200906 description hose connector angled brass ø 1/2"mm










### valves and tank inlets









### drain systems and wash basins

### **U-bends**









### water cycle components

### pressure reduction valves

### pressure reduction valves

### universa



No. 520881 Ref. No. 0301151

pressure reduction valve DESBORDES series DN15 connection 1/2" default setting 3bar setting range 1-5.5bar EN1567 p max 25bar t.max. 80°C brass WRAS/ACS



### ancillary products

### clamps

### hose clamps

### DIN 3017 - W2



1				
N	lo.	520114	Ref. No.	Q881304000
descrip	tion	hose clamp ø 20-3	2mm width 9mm (	Qty 10 pcs DIN 3017












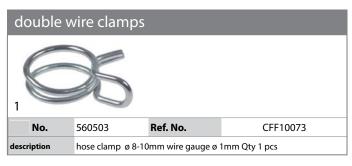


### pipes

### miscellaneous




### tools




### measuring equipment

### thermometers











tools, fastening materials, consumables

## No. 541900 Ref. No. TERMOM001 thermometer mounting ø 60mm t.max. 500°C 0 up to +500°C probe ø 8mm probe L 145mm capillary pipe 450mm

### fastening material


### screws






hexagoi	nal screws	5	
1			
No.	560202	Ref. No.	8300610
description	hexagonal scr 933 / ISO 4013		L 25mm SS WS 17 Qty 1 pcs DIN


1			
No.	506445	Ref. No.	0800228
description	hexagonal sc 933 / ISO 401		L 35mm SS WS 17 Qty 1 pcs DIN

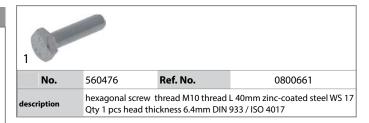


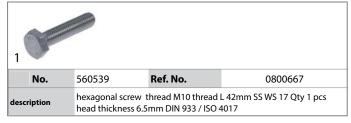






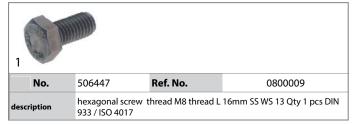



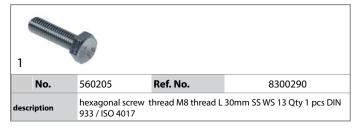











cylinde	head bolts		
DIN 912/	/ISO 4762		
1	-		
No.	560225	Ref. No.	8301260
description		cylinder head bolt thread M4 L 30mm thread L 20mm WS 3 intake hexagonal SS Qty 1 pcs head ø 7mm head thickness 4mm DIN 912/ ISO 4762	
side bol	ts		

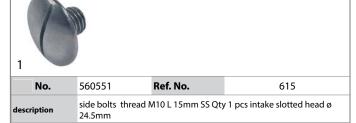


### grub screws DIN 914/ISO 4027 No. 560175 Ref. No. 0800682 description grub screw thread M8 L 16mm DIN 914/ISO 4027 intake internal hexagon WS 4 Qty 1 pcs


DIN 916/I	SO 4029		
1			
No.	560207	Ref. No.	8300280
description	grub screw thre hexagon WS 4 Q		DIN 916/ISO 4029 intake internal






ucscription	mamb serew time	aa mo tiireaa E ziii	III Ø ZZIIIII III OIIIII 55
nuts			
hexagon	al nuts		
DIN 934 /	ISO 4032/86	73	
1			
No.	560199	Ref. No.	0800082
description	hexagonal nut thr 4032/8673 Qty 10		S 17 SS DIN/ISO DIN 934 / ISO














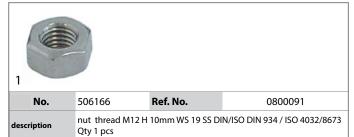

### No. 560227 Ref. No. 0800652 description hexagonal nut thread M3 H 4mm SS WS 5.5 Qty 1 pcs self-locking


1			
No.	560141	Ref. No.	0800653
description	hexagonal nut thread M5 H 5.4mm SS WS 8 Qty 20 pcs DIN/ISO DIN 985 self-locking		








### DIN 982 (self-locking, tall version) No. 560475 Ref. No. 0800144 description hexagonal nut thread M10 H 11.5mm zinc-coated steel WS 17 Qty 1 pcs DIN/ISO DIN 982


hexagona	al nuts m	etric (without n	orm)
1			
No.	506162	Ref. No.	0800045
description	nut		













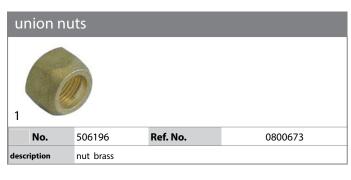







## washers spring rings No. 560209 Ref. No. 8300620 description lock washer ID Ø 10.3mm ED Ø 17.2mm SS Qty 1 pcs for thread M10

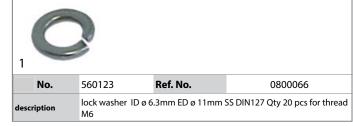





### No. 697478 Ref. No. 671 description spring washer ID Ø 19mm ED Ø 26mm Qty 1 pcs

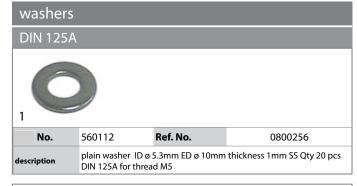




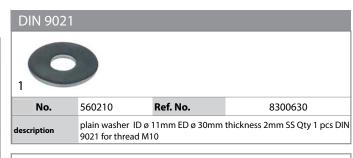



miscella	ineous		
No.	506160	Ref. No.	0800028
description	plain washer	ID ø 8.6mm ED ø 16mn	n thickness 1.5mm SS Qty 1 pcs



tooth loc	:k washe	rs	
DIN 6798	Ą		
No.	560125	Ref. No.	0800101
description	tooth lock wa 20 pcs for thr		mm SS DIN/ISO DIN 6798A Qty

slot nut	ts		
1 No.	560287	Ref. No.	8301530
description	slot nut W 6mm H 6mm L 20mm		


slot nut W 8mm H 7mm L 35mm




description





### 









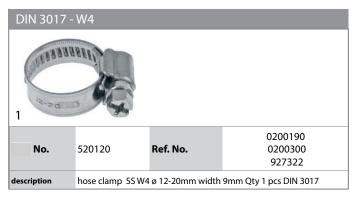


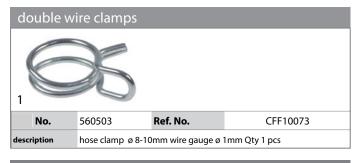
















### consumables

