
# Professionale pentru echipamente profesionale




COFFEEQUEEN


#### heating elements


#### heating elements for coffee machine





1		(jav	
No.	417493	Ref. No.	160104
description	30mm mounting	distance 50mm tub	g circuits 1 L 215mm W 50mm H e ø 8.5mm thread M14x1.5 win- 2 hole fixing immersion heater

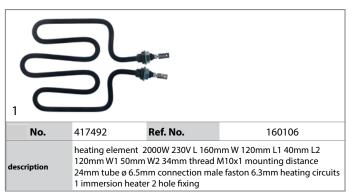


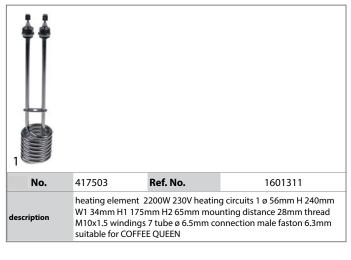



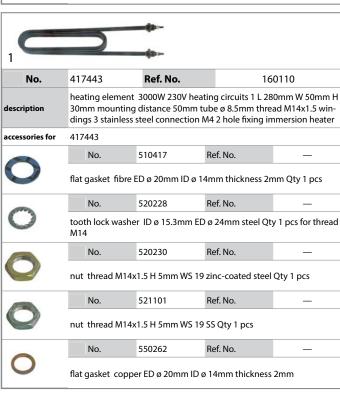









No.	417483	Ref. No.	120811
description			L 160mm W 150mm H 15mm ngth 200mm suitable for




#### flow heaters



#### thermostats

#### bi-metal thermostats

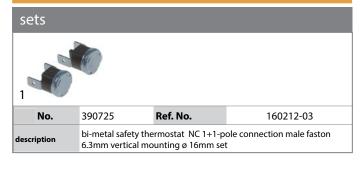

# control and safety thermostats

#### . .


#### 55.13\_ series

EGO




/==	7/5				
No.	375007	Ref. No.	16	0214	
scription	thermostat t.max. 110°C temperature range 30-110°C 1-pole 1NO 16A probe ø 6mm probe L 113mm capillary pipe 870mm capillary pipe isolatedmm gland nut M9x1 shaft L 25mm shaft position upper rotation 270°				
cessories for	375007				
	No.	110119	Ref. No.	_	
	knob thermostat t.max. 110°C ø 50mm shaft ø 6x4.6mm shaft flat upper black temperature range 30-110°C rotation 270°				

No. 110241 Ref. No. — knob thermostat t.max. 110°C ø 50mm shaft ø 6x4.6mm shaft flat upper black temperature range 30-110°C









# switches and momentary switches


#### rocker/momentary rocker switches


30x22mm

# No. 301014 Ref. No. 160819-02 160819-03 momentary rocker switch mounting measurements 30x11mm black 1NO 250V 16A connection male faston 6.3mm ambient temperature max. 85/125°C protection IP40 mounting ømm male faston 6.3mm

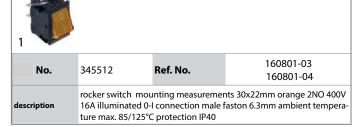


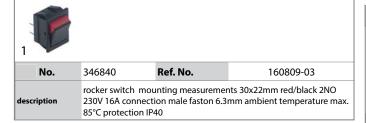






#### microswitches



pin-plunger actuated					
1					
No.	347411	Ref. No.	160821		
description	6.3mm L1 29.6mm	n ambient temperat	ICO connection male faston cure max. 125°C mounting ctuating force: 46g grey		






#### float switches



#### magnetic switches



#### lamps


#### indicator lights


#### indicator lights (complete)

#### 30x22mm



No.	359157	Ref. No.		160818-02
description	indicator light mounting measurements 30x22mm 230V green connection male faston 6.3mm tempresist. 125/55°C type RL2			
accessories for	359157			
_	No.	301036	Ref. No.	_
	protective cov		30x22mm for rock	er switch mounting

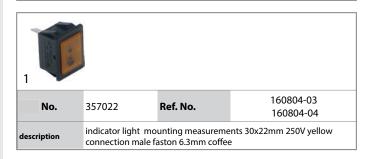

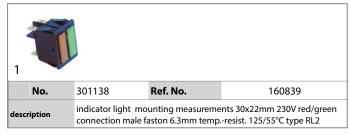

#### contactors

#### **ALLEN BRADLEY**

#### power contactors



No.	380930	Ref. No.	160225
description		auxiliary contacts	30VAC (AC3/400V) 5.3A/2.2kW 1NO connection screw connec-



No.	380931	Ref. No.	160222-01 1602221
description		auxiliary contacts	80VAC (AC3/400V) 23A/11kW 1NO connection screw connec-



No.	380523	Ref. No.	160223-02 1602231
description		liary contacts 1NO	30VAC (AC3/400V) 9A/4kW main connection screw connection



# relays

#### power relays

#### with male contacts

#### bullet connectors, 11 contact



No.	380132	Ref. No.	160207	
description	power relays Italiana Relè 230VAC 10A 3CO connection plug-in connection round 11-pole manuf. no. C43-230AC ZVE11 250V 11-pole			
accessories for	380132			

ccessories for 380132

The state of the s

relay socket 11-pole connection plug-in connection round 11-pole dimensions 65x28x40mm 250V voltage AC 10A Italiana Relè manuf. no. ZVE11

#### female contact 4.8mm

No.



No.	380475	Ref. No.	160245 160245-01
description	' '	connection manuf	A 2CO connection F4.8 raster . no. 56.32.8.230.0040 250V


accessories for 380475



No. 380476 Ref. No. 160246-01

relay socket dimensions 78x27x33.5mm 250V voltage AC 10A FIN-DER manuf. no. 96.72

#### relay sockets

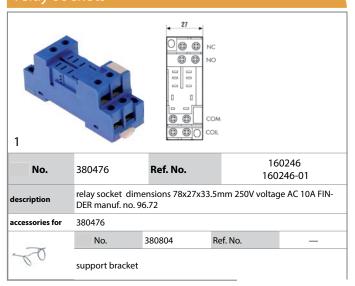

#### accessories



#### time relays

#### time relays



No.	381163	Ref. No.	1602491
description	,	ET EMER8-8882919 ng measurements D	8 time range 0.1s-20h 12-240V DIN railmm 1CO



No.	380692	Ref. No.	1602491
description	time relay CROUZI 24-240VAC/24VDC		time range 0.1s-10h








#### probes

#### producer-specific probes



#### accessories

#### miscellaneous




No.	531063	Ref. No.	1605361
description	gasket ø 24mm ID	ø 9mm H 19mm m	nounting ø 20mm silicone


#### electronics

#### **PCBs**











# keypads


#### front foils








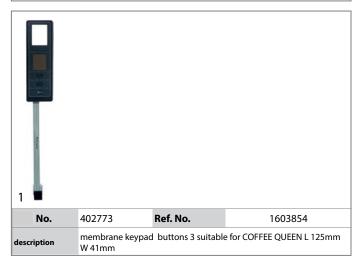

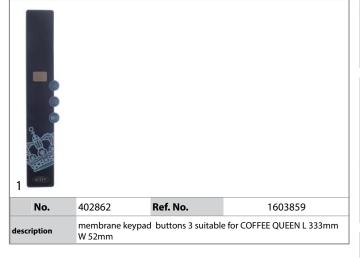



#### solenoid valves

#### solenoid valves (water)

#### ROBERTSHAW/INVENSYS

medium temperature:  $90^{\circ}\text{C}$   $90^{\circ}\text{C}$   $60^{\circ}\text{C}$  ambient temperature:  $60^{\circ}\text{C}$   $25^{\circ}\text{C}$   $60^{\circ}\text{C}$  duty cycle:  $40^{\circ}\text{M}$   $100^{\circ}\text{M}$   $100^{\circ}\text{M}$ 

#### solenoid valves with reducers

#### single



No.	370613	Ref. No.	120624-01
lescription		I/min EATON (INVE	inlet 3/4" outlet 11.5mm input NSYS) plastic flow regulating Ive inlet white



	solenoid valve sing	gle straight 230VAC	inlet 3/4" outlet 11.5mm input	
description	9l/min output 0.95	I/min EATON (INVE	NSYS) flow regulating valve	
	outlet stainless stee	el flow regulating v	alve inlet blue	

120620-01




No.	370624	Ref. No.	120634
description	9l/min output 5l/n		Cinlet 3/4" outlet 11.5mm input YS) plastic flow regulating valve



description

# 2-fold 120625 No. 370614 Ref. No. 120625-01

solenoid valve double straight 230VAC inlet 3/4" outlet 11.5mm input 9l/min EATON (INVENSYS) plastic flow regulating valve inlet blue description output A 0.95l/min output B 2.5l/min flow regulating valve outlet A stainless steel flow regulating valve outlet B brown




solenoid valve double straight 230VAC inlet 3/4" outlet 11.5mm input 9l/min flow regulating valve inlet blue output A 0.95l/min output B 0.95I/min flow regulating valve outlet A stainless steel flow regulating valve outlet B stainless steel




9l/min t.max. 90°C EATON (INVENSYS) plastic flow regulating valve inlet light blue output B 2.5I/min flow regulating valve outlet B brown output A with adapter


#### 3-fold No. Ref. No. 120622-01 solenoid valve triple straight 230VAC inlet 3/4" outlet 11.5mm input 9I/min EATON (INVENSYS) plastic flow regulating valve inlet blue outdescription put A 0.95l/min output B 2.5l/min output C 0.95l/min flow regulating valve outlet A stainless steel flow regulating valve outlet B brown flow regulating valve outlet C stainless steel


various				
1				
No.	371141	Ref. No.	160230 160230-05	
description	solenoid valve si	ngle angled 240VAC	outlet 11.5mm inlet 15mm	






#### electrodes









1			
No.	402837	Ref. No.	1205302
description			mm probe L 38mm insulated thread M3 suitable for COFFEE

#### fans


#### axial fans



with ball bearings

#### fuses

#### fine fuses



fine fuse holders					
No. 358832 Ref. No. 160432-01 160432-02					
description fuse holder suitable fuse ø5x20mm 6.3A rated 250V					

#### line circuit breakers

#### miscellaneous



No.	380927	Ref. No.	160429-02
description	power contactor i	nominal 6A 1-pole o	:haracteristic B

#### electric accessories

#### plugs - couplings - power sockets

# protective contact power sockets

producer-specific power sockets

#### BONAMAT



No.	551035	Ref. No.	160700
description		n lid max. 16A coun mm 1 phase L/N/PE	tries DE 240V H 60mm moun-

#### appliance sockets/plugs

#### low temperature appliances 70°C



No.	550704	Ref. No.	160570
description			male faston 6.3mm max
	10A/250V T70 moι	unting distance 40n	nm hole ø 3.5mm thermoplastic

#### cables


#### power supply cables



No.	551116	Ref. No.	160565
description		m² max. 10A max 25	ble CEE7/7 - C13 3-pole con- 50V 1.4m H05VVF T70 2-pole +





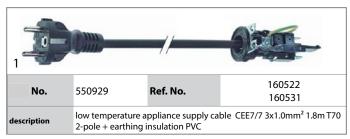


#### terminals

# connection terminals with screw/faston connections



No.	550411	Ref. No.	160549-01
description	power terminal blo / F6.3 tempresist.		A max 450V connection ø6mm <sup>2</sup> n 6mm <sup>2</sup>

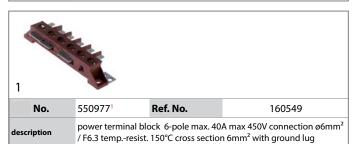

#### with ground lug


#### connection terminals with faston connections



No.	519304	Ref. No.	160351
description	distribution terminal block 3-pole max. 15A max 450V connection male faston 6.3mm tempresist. 110°C Qty 1 pcs		

# ignition parts

#### ignition switches

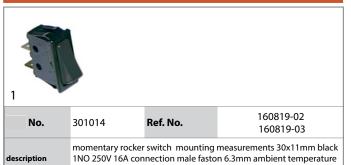

max. 85/125°C protection IP40 mounting ømm male faston 6.3mm

# equipment-specific units

#### for espresso machines

#### filter holders

filter holders standard

filter holder without spout



hight 10mm wedge position horizontal number of wedges 2 lever

#### for pour machines

#### coffee pots



No.	960014	Ref. No.	110001 110303
escription (	coffee pot 1.8l glas	suitable for COFFE	EE QUEEN

#### coffee filters

#### paper filters

#### basket filters



•			
No.	960017	Ref. No.	110102-02
description	paper filter D1 ø 1 COFFEE QUEEN	10mm D2 ø 400mn	n Qty 500 pcs suitable for






























#### **EQUIPMENT-SPECIFIC UNITS COFFEEQUEEN**





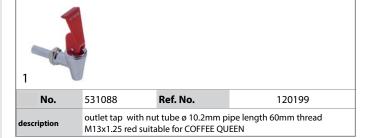





components				
1				
No.	525469	Ref. No.	150111	
description	gasket for tap H 2	1mm ø 20mm suita	able for COFFEE QUEEN	
9				

Ref. No.


gasket for tap H 29mm ø 31mm

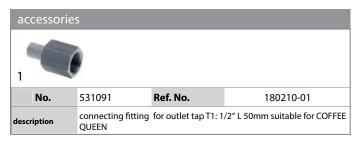



drain pipes						
No.	527558	Ref. No.	180242			
description	spout IT 1/4"	ET 3/8"				

brew units						
brewing units						
1						
No.	527559	Ref. No.	180	1803-04		
description	rotating joint fo	r brewarm suitable	e for COFFEE QUE	EN EVENT		
accessories for	cessories for 527559					
	No.	527560	Ref. No.	1801805		
$\circ$	slide bearing ID ø 25mm ED ø 30.5mm					
	No.	527561	Ref. No.	1206502		
$\circ$	O-ring EPDM thickness 3mm ID ø 22mm Qty 1 pcs					
	No.	527562	Ref. No.	1801806		
	slide bearing ID ø 25mm ED ø 27.2mm					
	No.	527563	Ref. No.	120647-01		
0	O-ring EPDM thi	ickness 2.4mm ID	ø 16.3mm Qty 1 p	ocs		






150110

No.

description

525433

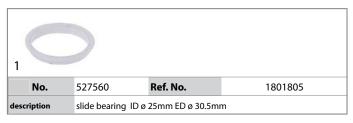














liquid level pipes					
liquid level pipes					
1					
No.	525487	Ref. No.	120213		
description	water level tube ED ø 15.5mm ID ø 11.5mm H 240mm for COFFEE QUEEN				

1					
No.	525474	Ref. No.	120227		
description	water level tube ED ø 15.5mm ID ø 11.5mm H 280mm QUEEN				


10			0
No.	525488	Ref. No.	120215
description	water level tub QUEEN	e ED ø 15.5mm ID ø 11	1.5mm H 316mm for COFFEE






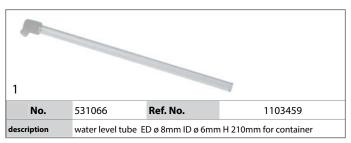

1			•
No.	531092	Ref. No.	1103359
description	water level tube E QUEEN	D ø 8mm ID ø 6mm	H 240mm with ball for COFFEE

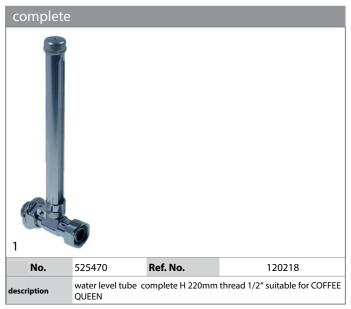












### **COFFEEQUEEN** EQUIPMENT-SPECIFIC UNITS/FITTINGS FOR CATERING EQUIPMENT




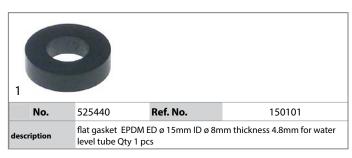














# fittings for catering equipment








# equipment feet and end caps


# screw-in feet




#### gaskets







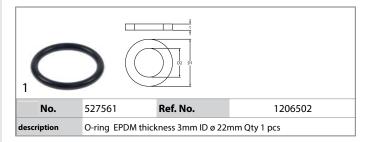


#### sealing washers

#### rubber gaskets




No.	525440	Ref. No.	150101
description	flat gasket EPDM E level tube Qty 1 pc		nm thickness 4.8mm for water

#### hoses

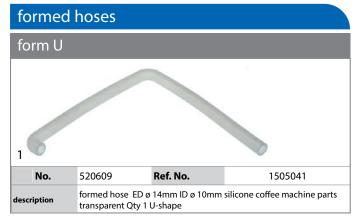

#### tools



#### consumables

#### coffee filters



paper filters



•			
No.	960015	Ref. No.	110110
description	paper filter for coffee makers D1 ø 110mm D2 ø 250mm Qty 100		
description	paper filter for cof	fee makers D1 ø 11	0mm D2 ø 250mm Qty 1000





