

Professionall

Solutii profesionale pentru echipamente profesionale



GAS COMPONENTS



ELECTRIC COMPONENTS



WATER TECHNOLOGY



MECHANICAL COMPONENTS




TOOLS


Spare parts suitable for

COVEN


heating elements


heating elements for proofing cabinets


			
No.	419234	Ref. No.	EMRSA025
description	heating element 2500W 240V heating circuits 2 L 538mm W 430mm flange length 100mm flange width 20mm hole distance 86mm connection length 60mm connection M5 tube ø 6.3mm flange leavening cabinet new edition		

			
No.	418972	Ref. No.	EMRSB033 EMRSB38333
description	heating element 3300W 240V heating circuits 1 ID ø 178mm ED ø 190mm L 205mm H 34mm L1 10mm W1 59mm H1 11mm H2 23mm flange length 100mm flange width 21mm hole distance 86mm connection male faston 6.3mm connection length 34mm tube ø 6.3mm convection heating element		

heating elements for convection

			
No.	420084	Ref. No.	EMR10000
description	heating element 10000W 240V heating circuits 3 ID ø 340mm ED ø 350mm L 375mm H 110mm L1 23mm W1 102mm H1 14mm H2 96mm flange length 142mm flange width 25mm hole distance 63mm connection M4 tube ø 6.2mm hole ø 7mm		


			
No.	417288	Ref. No.	EMRSB160
description	heating element 1600W		

			
No.	418986	Ref. No.	EMRSB030
description	heating element 3000W 240V heating circuits 1 ID ø 180mm ED ø 186mm L 210mm H 31mm L1 11mm W1 60mm H1 7mm H2 24.5mm flange length 100mm flange width 22mm hole distance 86mm connection male faston 6.3mm connection length 34.5mm tube ø 6.25mm convection heating element hole ø 5mm rectangular flange		

energy regulators

EGO

1-circuit

			
No.	380015	Ref. No.	EMPUAH00
description	energy regulator 230V 13A single-circuit turn direction right shaft ø 6x4.6mm shaft L 23mm mounting thread M4 power release 6-100% no. 50.57021.010		

thermostats

control and safety thermostats

EGO

control thermostats

55.10/19_ series


			
No.	375860	Ref. No.	EMTS0300
description	thermostat t.max. 289°C temperature range 57-289°C 1-pole 1NO 16A probe ø 3.1mm probe L 226mm capillary pipe 1780mm capillary pipe isolated 1770mm gland nut shaft ø 6x4.6mm shaft L 23mm shaft position upper° rotation 270° probe material SS		



No.	375654	Ref. No.	EMTS55ME
description	thermostat t.max. 99°C temperature range fixed 99°C 1-pole 1CO 16A probe ø 6mm probe L 74mm capillary pipe 900mm capillary pipe isolated 900mm gland nut		

safety thermostats

55.10/19_ series



No.	375857	Ref. No.	EMTS5350
description	safety thermostat switch-off temp. 350°C 1-pole 16A probe ø 3.1mm probe L 201mm capillary pipe 870mm capillary pipe isolated 870mm gland nut probe SS		

switches and momentary switches

push/momentary push switches

miscellaneous



No.	347501	Ref. No.	EMDEVOL
description	push switch black 2CO 250V 16A connection male faston 6.3mm ambient temperature max. 85°C protection IP40		

microswitches

pin-plunger actuated

M10



No.	346078	Ref. No.	EMMS1600
description	microswitch with plunger thread M10x0.75 250V 16A 1CO connection screw		

cam switches

on/off



No.	300129	Ref. No.	EMIG1600
description	cam switch 2 operating positions 2NO sequence 0-1 16A shaft ø 6x4.6mm shaft L 23mm connection male faston 6.3mm ceramic		

3 operating positions



No.	347498	Ref. No.	EMIGSFMX
description	cam switch sequence 1-0-2 shaft ø 6x4.6mm shaft L 23mm		

4 operating positions




No.	300236	Ref. No.	EMIGSLMX
description	cam switch 25/32A shaft ø 6x4.6mm shaft L 23mm 3-pole		




No.	347500	Ref. No.	EMIGSUMX
description	cam switch shaft ø 6x4.6mm shaft L 23mm connection male faston 6.3mm		

encoders and potentiometers


			
1			
No.	402935	Ref. No.	EMREST01
description	potentiometer for hot air oven 180Ohm L 214mm ø 32mm		


lamps


indicator lights

indicator lights (complete)			
ø12mm			
with screw socket			
			
1			
No.	359027	Ref. No.	EMLSAHRO
description	indicator light ø 12mm 250V green connection male faston 6.3mm		

screw-on/push-on fit


light bulbs			
for ovens			
			
1			
No.	359610	Ref. No.	EMPLLAHO
description	light bulb t.max. 300°C socket E14 15W 230V ø 22mm L 47mm lens L 20mm for oven lamp type Philips		

			
1			
No.	359740	Ref. No.	EMPLLAHO
description	light bulb t.max. 300°C socket E14 15W 230V ø 22mm L 48mm lens L 20mm for oven lamp IMPORT		

			
1			
No.	359612	Ref. No.	EMPLL025
description	light bulb t.max. 300°C socket E14 25W 230V ø 25mm L 56mm lens L 30mm for oven lamp type Philips		

halogen lamp


for socket G4 / G6.35 / G9


			
1			
No.	359945	Ref. No.	EMPLAL25
description	halogen lamp socket G9 230V 25W temp.-resist. 300°C		

oven lamps

universal oven lamps

mounting diameter 35.5mm

			
1			
No.	357170	Ref. No.	EMPLP042
description	oven lamp mounting ø 35.5mm 230V 25W socket G9 temp.-resist. 300°C connection F6.3		

			
1			
No.	359709	Ref. No.	EMPLG042
description	oven lamp glass thr.ø 33.5mm ø 42mm hard glas temp.-resist. 350°C		

			
1			
No.	359705	Ref. No.	EMPLG800
description	oven lamp glass thr.ø 33.5mm ø 52mm hard glas temp.-resist. 350°C		
accessories for	359705		
	No.	359610	Ref. No. EEMPLLAHO
	light bulb t.max. 300°C socket E14 15W 230V ø 22mm L 47mm lens L 20mm for oven lamp type Philips		
	No.	359700	Ref. No. —
	gasket for pizza oven fibre glass ID ø 32.5mm ED ø 55mm thickness 5mm		
	No.	359721	Ref. No. —
	gasket silicone ED ø 48mm ID ø 39.5mm thickness 5mm Qty 1 pcs		
	No.	359837	Ref. No. —
	gasket ID ø 33mm ED ø 46mm thickness 1mm graphite		
	No.	359838	Ref. No. —
	gasket ID ø 33mm ED ø 45mm		

55x70mm



1

No.	359297	Ref. No.	EMPLQU25B
description	frame L 95mm W 81mm mounting distance 68/83mm thickness 6mm		
accessories for	359297		
	No.	359299	Ref. No.
			—
	gasket L 91mm W 77mm hole ø 3mm for oven lamp		

lamps

light bulbs



1

No.	359610	Ref. No.	EMPLLAHO
description	light bulb t.max. 300°C socket E14 15W 230V ø 22mm L 47mm lens L 20mm for oven lamp type Philips		



1

No.	359740	Ref. No.	EMPLLAHO
description	light bulb t.max. 300°C socket E14 15W 230V ø 22mm L 48mm lens L 20mm for oven lamp IMPORT		



1

No.	359612	Ref. No.	EMPLL025
description	light bulb t.max. 300°C socket E14 25W 230V ø 25mm L 56mm lens L 30mm for oven lamp type Philips		

halogen lamps

for socket G4 / G6.35 / G9



1

No.	359945	Ref. No.	EMPLAL25
description	halogen lamp socket G9 230V 25W temp.-resist. 300°C		

timers

programme timers



1

No.	360492	Ref. No.	EMC6003 F33245 EMC6003 F3324S
description	timer CDC 6003F engines 1 chambers 3 operation time 324s 230V shaft ø 5mm shaft L 9mm motor type M48L ATS		

mechanical timers



1

No.	350147	Ref. No.	EMTM0120
description	timer 2-pole operation time 120min impulse mechanical 2NO at 250V 16A shaft ø 6x4.6mm shaft L 23.5mm mounting distance 28mm mounting thread M4 connection male faston 6.3mm		




1

No.	350022	Ref. No.	EMFTC120
description	timer M2 2-pole operation time 120min impulse mechanical 2CO at 250V 16A permanent position yes shaft ø 6x4.6mm shaft 6x4.6mm shaft L 23mm mounting distance 28mm connection lateral		
accessories for	350022		
	No.	110366	Ref. No.
			—
	knob switch zero mark t.max.°C ø 44mm shaft ø 6x4.6mm shaft flat upper black		
	No.	110381	Ref. No.
			—
	dial plate graduation 120min permanent position yes rotation 0-300° ø 60mm timers knob ø 45mm with permanent position		

alarm devices

buzzer boards


			
1			
No.	350146	Ref. No.	EMFTES07
description	buzzer board connection male faston 4.8mm		

contactors


SIEMENS


power contactors

			
1			
No.	380652	Ref. No.	EMCNAH25
description	power contactor resistive load 22A 230VAC (AC3/400V) 9A/4kW main contacts 3NO auxiliary contacts 1NC connection screw connection type 3RT10-16-1AP02		

			
1			
No.	380389	Ref. No.	EMCN1H25
description	power contactor resistive load 22A 230VAC (AC3/400V) 9A/4kW main contacts 3NO auxiliary contacts 1NO connection screw connection type 3RT10-16-1AP01		


auxiliary contacts

			
1			
No.	380947	Ref. No.	EMCNAHA4 EMCNAHAU
description	auxiliary contact contacts 1NO/1NC AC15 3A for contactors 3RT102 3 RT103 connection screw connection type 3RH1921-1FA11		

			
1			
No.	380533	Ref. No.	EMCNAAHUM
description	auxiliary contact contacts 3NO/1NC AC15 3A for contactors 3RT101 connection screw connection type 3RT1911-1FA31 resistive load 10A AC-12 10A		

relays

relay sockets

			
1			
No.	380958	Ref. No.	EMRGLZX4
description	relay socket 8-pole connection plug-in connection round 8-pole 250V voltage AC 10A		


1

No.	380137	Ref. No.	EMRGLZX4
description	relay socket 8-pole connection plug-in connection round 8-pole dimensions 65x28x40mm 380V voltage AC 10A Italiana Relè manuf. no. ZVE8		
accessories for	380137		
	No.	380805	Ref. No.
			—

support bracket


level relays

miscellaneous



1

No.	402994	Ref. No.	EMRGLVX4
description	level controller 50/60Hz 8-pole 230V voltage AC 16A type RL30/1S/8		
accessories for	402994		



No.	380958	Ref. No.	EMRGLZX4
relay socket 8-pole connection plug-in connection round 8-pole 250V voltage AC 10A			



electronic controllers

TECNOLOGIC

universal controllers

built-in version



1

No.	379486	Ref. No.	EMRESC04
description	electronic controller TECNOLOGIC type TLK38FCR---- mounting measurements 71x29mm 12V voltage AC/DC Pt100/TC (J,K) relay outputs 1 CO-16A(8) Pt100/TC (J,K) built-in depth 64mm defr. funct. no dependent on probe°C display 4 digits		

probes

producer-specific probes

probes



1


No.	379756	Ref. No.	EMSONTERTEC
description	probe Pt100 cable PTFE probe -100 up to 450°C cable -40 up to +250°C connection 3-wire thread M12x1 probe ø4x50mm cable length 1.5m		



1

No.	379432	Ref. No.	EMSONTERTE
description	temperature probe Pt100 cable PTFE probe -100 up to 450°C cable -40 up to +250°C connection 3-wire thread 1/4" probe ø4x60mm cable length 1.1m		

core probes

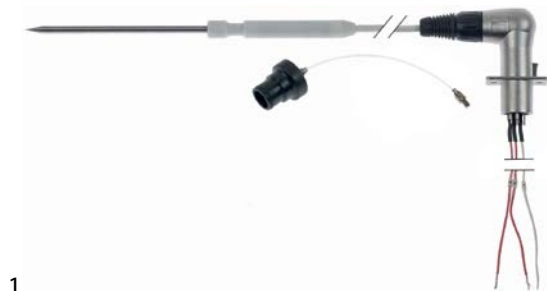

1

No.	379431	Ref. No.	EMSONSPEC
description	core temperature probe Pt100 cable PTFE probe -40 up to +250°C cable -40 up to +250°C connection 3-wire probe ø4x100mm thread 1/4" cable length 3m handle ø 12mm handle length 85mm		

electronics

PCBs



1

No.	403200	Ref. No.	ELSCRO5P
description	keypad PCB combi-steamer 6/10/20EMD L 180mm W 90mm buttons 5		



1

No.	402933	Ref. No.	ELSCAR5P
description	PCB autoreverse L 141mm W 63mm		

keypads

front foils



1

No.	403015	Ref. No.	CFRPC10X
description	keypad foil L 167mm W 99mm		

solenoid valves


solenoid valves (water)

ROBERTSHAW/INVENSYS


medium temperature: 90°C 90°C 60°C


ambient temperature: 60°C 25°C 60°C

duty cycle: 40% 100% 100%











			
1			
No.	372015	Ref. No.	EMUAASRPE
description	solenoid valve single angled 230VAC inlet 3/4" outlet 11.5mm input 10l/min DN10 EATON (INVENSYS) flow regulating valve inlet white		










TP



componenti per elettromeccanica



1

No.	370025	Ref. No.	EMUA3C04	
description	solenoid valve triple straight 230VAC inlet 3/4" outlet 11.5mm DN10 TP			
spare parts for	370025			
	No.	371013	Ref. No.	—
solenoid coil TP 230VAC 50/60Hz				
accessories for	370025			
	No.	371220	Ref. No.	—
reducer TP flow rate 3l/min red tolerance ±15%				
	No.	371221	Ref. No.	—
reducer TP flow rate 5.5l/min yellow tolerance ±15%				
	No.	371222	Ref. No.	—
reducer TP flow rate 6l/min grey tolerance ±15%				
	No.	371223	Ref. No.	—
reducer TP flow rate 10l/min white tolerance ±15%				
	No.	371224	Ref. No.	—
reducer TP flow rate 12l/min bronze tolerance ±15%				
	No.	371225	Ref. No.	—
reducer TP flow rate 16l/min light brown tolerance ±15%				
	No.	371226	Ref. No.	—
reducer TP flow rate 20l/min red tolerance ±15%				
	No.	371230	Ref. No.	—
reducer TP flow rate 0.25l/min red tolerance ±25%				
	No.	371231	Ref. No.	—
reducer TP flow rate 0.35l/min violet toler				

accessories for	370025			
	No.	371232	Ref. No.	—
reducer TP flow rate 0.5l/min orange tolerance ±25%				
	No.	371233	Ref. No.	—
reducer TP flow rate 0.8l/min white tolerance ±25%				
	No.	371234	Ref. No.	—
reducer TP flow rate 1l/min light blue tolerance ±25%				
	No.	371235	Ref. No.	—
reducer TP flow rate 1.2l/min brown tolerance ±25%				
	No.	371236	Ref. No.	—
reducer TP flow rate 1.5l/min light brown tolerance ±25%				
	No.	371237	Ref. No.	—
reducer TP flow rate 2.5l/min yellow tolerance ±25%				
	No.	371238	Ref. No.	—
reducer TP flow rate 3.4l/min dark green tolerance ±25%				
	No.	371239	Ref. No.	—
reducer TP flow rate 5l/min black tolerance ±25%				
	No.	371240	Ref. No.	—
reducer TP flow rate 8l/min blue tolerance ±20%				



TP
 componenti per elettrodomestici

1








No.	370015	Ref. No.	EMUASRPE
description	solenoid valve single angled 230VAC inlet 3/4" outlet 11.5mm DN10 TP		
accessories for	370015		
	No.	371220	Ref. No. —
reducer TP flow rate 3l/min red tolerance ±15%			
	No.	371221	Ref. No. —
reducer TP flow rate 5.5l/min yellow tolerance ±15%			
	No.	371222	Ref. No. —
reducer TP flow rate 6l/min grey tolerance ±15%			
	No.	371223	Ref. No. —
reducer TP flow rate 10l/min white tolerance ±15%			
	No.	371224	Ref. No. —
reducer TP flow rate 12l/min bronze tolerance ±15%			
	No.	371225	Ref. No. —
reducer TP flow rate 16l/min light brown tolerance ±15%			

Table continues overleaf

accessories for 370015				
	No.	371226	Ref. No.	—
reducer TP flow rate 20l/min red tolerance $\pm 15\%$				
	No.	371230	Ref. No.	—
reducer TP flow rate 0.25l/min red tolerance $\pm 25\%$				
	No.	371231	Ref. No.	—
reducer TP flow rate 0.35l/min violet tolerance $\pm 25\%$				
	No.	371232	Ref. No.	—
reducer TP flow rate 0.5l/min orange tolerance $\pm 25\%$				
	No.	371233	Ref. No.	—
reducer TP flow rate 0.8l/min white tolerance $\pm 25\%$				
	No.	371234	Ref. No.	—
reducer TP flow rate 1l/min light blue tolerance $\pm 25\%$				
	No.	371235	Ref. No.	—
reducer TP flow rate 1.2l/min brown tolerance $\pm 25\%$				
	No.	371236	Ref. No.	—
reducer TP flow rate 1.5l/min light brown tolerance $\pm 25\%$				
	No.	371237	Ref. No.	—
reducer TP flow rate 2.5l/min yellow tolerance $\pm 25\%$				
	No.	371238	Ref. No.	—
reducer TP flow rate 3.4l/min dark green tolerance $\pm 25\%$				
	No.	371239	Ref. No.	—
reducer TP flow rate 5l/min black tolerance $\pm 25\%$				
	No.	371240	Ref. No.	—
reducer TP flow rate 8l/min blue tolerance $\pm 20\%$				

solenoid valves with reducers

1

No.

370437

Ref. No.

EMUA2RPE

description

solenoid valve double angled 230VAC inlet 3/4" input 10l/min output 1.2/1.2l/min DN10 t.max. 90°C TP plastic flow regulating valve inlet white outlet 11.5mm output A 1.2l/min output B 1.2l/min flow regulating valve outlet A dark brown flow regulating valve outlet B dark brown

1

No.	370644	Ref. No.	EMUA2C180
description	solenoid valve double straight 220-240VAC inlet 3/4" input 10l/min DN10 TP flow regulating valve inlet white outlet 11.5mm output A 1.5l/min output B 1.5l/min flow regulating valve outlet A brown flow regulating valve outlet B brown		

1

No.	370670 ¹	Ref. No.	EMUA3C04
description	solenoid valve straight triple 230VAC inlet 3/4" outlet 11.5mm 10 TP plastic with reducer set		

¹with reducer set

fans


axial fans

import

¹with ball bearings




1

No.	601081 ¹	Ref. No.	EMMOAS6	
description	axial fan L 80mm W 80mm H 38mm 230VAC 50/60Hz 14/13.5W bearing ball bearing connection male faston 2.8mm metal ADDA fan wheel ø 75mm temp.-resist. 70°C			
accessories for	601081			
	No.	691102	Ref. No.	—
	guard ø 75mm mounting distance 71 mm for axial fan 80mm			


¹with ball bearings



hot air fans

miscellaneous



1



No.	601011	Ref. No.	EMMVR150	
description	hot air fan 220-240V 40W 50/60Hz L1 65mm L2 15mm L3 25mm L4 87mm fan wheel ø 150mm FIME type C25R8023CLH			
accessories for	601011			
	No.	550879	Ref. No.	—
	insulation ø 130mm thickness 3mm hole ø 20mm for hot air fan			
	No.	601260	Ref. No.	—
	nut thread M6L IT for hot air fan			

pumps

drain pumps

ASKOLL



1

No.	500346	Ref. No.	MCPOMPAMX
description	drain pump inlet ø 30mm outlet ø 22mm 230V 40W 50Hz ASKOLL type M231 XP with holder		

PLASET

1

No.	500514	Ref. No.	MCPOMPAMX
description	drain pump inlet ø 30mm outlet ø 22mm 230V 34W		

electric accessories

terminals

connection terminals with screw/faston connections



1

No.	550278	Ref. No.	EMMR1102
description	power terminal block 3-pole max. 40A max 400V connection ø6mm ² / F6.3 temp.-resist. 150°C cross section 6mm ²		



1


No.	550411	Ref. No.	EMMR1224
description	power terminal block 6-pole max. 40A max 450V connection ø6mm² / F6.3 temp.-resist. 150°C cross section 6mm²		

gas valves and ignition boxes









gas control valves

SIT

NOVASIT



1

No.	101914	Ref. No.	EMSIT822N	
description	gas valve SIT series Novasit 822 230V 50Hz gas inlet 1/2" gas outlet 1/2" thermocouple connection pilot connection closed ignition pressure 3-30mbar pressure range 3-30mbar pressure regulator connection blind equiv. no. 0.822.144			
spare parts for	101914			
	No.	101313	Ref. No.	—
	solenoid coil 230V 50Hz			
	No.	101542	Ref. No.	—
	solenoid coil 50Hz NOVA 822/826/827 suitable for NOVASIT 230V			
accessories for	101914			
	No.	101305	Ref. No.	—
	gas connection straight 1/2" flange 45x45mm ELETTROSIT/V4400/4600/4605 suitable for SIT/HONEYWELL hole distance 36x36mm			
	No.	101306	Ref. No.	—
	gas connection angled flange 45x45mm hole distance 36x36mm 1/2" ELETTROSIT/V4400/4600/4605 screw with O-ring suitable for SIT/HONEYWELL			
	No.	101307	Ref. No.	—
	gas connection straight flange 45x45mm hole distance 36x36mm 3/4" ELETTROSIT/V4400/4600/4605 screw with O-ring suitable for SIT/HONEYWELL			
	No.	101308	Ref. No.	—
	gas connection angled flange 45x45mm hole distance 36x36mm 3/4" ELETTROSIT/V4400/4600/4605 screw with O-ring suitable for SIT/HONEYWELL			
	No.	101503	Ref. No.	—
	O-ring EPDM thickness 2mm ID ø 32mm Qty 1 pcs			
	No.	101924	Ref. No.	—
	plug with cable L 1090mm suitable for NOVA 822/826/827			

ignition boxes

BRAHMA



1

No.	107471	Ref. No.	EMCONFIN6G
description	ignition box BRAHMA type CM11 electrodes 2 waiting time 1.5s safety time 10s 230V 7VA 50-60Hz		

ignition parts










pilot burners









SIT

100 series




1

No.	106906	Ref. No.	EMSITBP0	
description	pilot burner SIT type 100 series 3 flames nozzle ø 0.2mm gas connection 6mm			
spare parts for	106906			
	No.	100245	Ref. No.	—
	pilot burner nozzle LPG code 20 bore ø 0.2mm Qty 1 pcs thread M8x0.75			
	No.	100855	Ref. No.	—
	pilot burner bracket triple			
	No.	100885	Ref. No.	—
	air mixing sleeve for pilot burner Qty 1 pcs			
	No.	100916	Ref. No.	—
	compression spring for pilot burner Qty 1 pcs			
	No.	100917	Ref. No.	—
	gasket for pilot burner Qty 1 pcs aluminium			
	No.	100918	Ref. No.	—
	screw for pilot burner			
	No.	107162	Ref. No.	—
	pilot burner cap SIT 3 flames Hmm Lmm Qty 1 pcs			
	No.	107701	Ref. No.	—
	pilot burner bottom part SIT 100 series nozzle ø 0.2mm			
accessories for	106906			
	No.	100245	Ref. No.	—
	pilot burner nozzle LPG code 20 bore ø 0.2mm Qty 1 pcs thread M8x0.75			

accessories for 106906		No.	100246	Ref. No.	—
	pilot burner nozzle natural gas bore \varnothing 0.35mm Qty 1 pcs thread M8x0.75	No.	100904	Ref. No.	—
	locking screw M10x1 for pipe \varnothing 4mm Qty 1 pcs	No.	100905	Ref. No.	—
	locking screw M10x1 for pipe \varnothing 6mm Qty 1 pcs	No.	102110	Ref. No.	—
	pilot tube copper pipe \varnothing 4mm thickness 1mm L 3000mm	No.	102111	Ref. No.	—
	pilot tube copper pipe \varnothing 6mm thickness 1mm L 3000mm	No.	107171	Ref. No.	—
	pilot burner nozzle SIT natural/liquid gas bore \varnothing 0.25mm Qty 1 pcs	No.	107700	Ref. No.	—
	pilot burner bottom part SIT 100 series nozzle \varnothing 0.25mm	No.	107702	Ref. No.	—
	pilot burner bottom part SIT 100 series nozzle \varnothing 0.35mm				


accessories

ignition electrodes



No.	100706	Ref. No.	EMSITCA0
description	ignition electrode connection M4 Qty 1 pcs		

electrodes



No.	100706	Ref. No.	EMSITCA0
description	ignition electrode connection M4 Qty 1 pcs		

ignition units



1

No.	102485	Ref. No.	EMACA000
description	ignition unit outputs 2 220-240VAC 0.6VA 50-60Hz		



1

No.	101002	Ref. No.	EMACA000
description	ignition unit outputs 2 230VAC dimensions 88x23x34mm mounting distance 73mm inlet F6.3x0.8 outlet F2.8x0.8 0.6VA 50/60Hz		


thermocouples

plug-in thermocouples

plug-in thermocouples standard

with barrel socket \varnothing 6(6.5)mm

thermocouples SIT

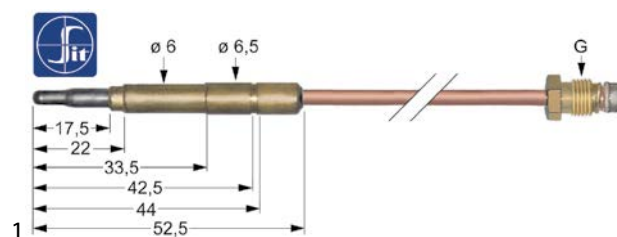

No.	107614	Ref. No.	EMSITT150 EMSITT20
description	thermocouple SIT M9x1 L 1500mm plug connection \varnothing 6.0(6.5)mm		

equipment-specific units

for convection ovens/combi-steamers

glass panels



1

No.	694560	Ref. No.	MCVE0002
description	glass panel L 388mm W 310mm thickness 4mm Qty 1 pcs		



knobs

producer-specific knobs

COVEN



1

No.	111421	Ref. No.	MCMA0M0T
description	knob zero mark ø 48mm shaft ø 6x4.6mm shaft flat upper black		

locks

handle latches






universal

outside fixing

locks



1

No.	694065	Ref. No.	MCCHSAMX
description	door handle for headed units L 145mm W 40mm H 62mm spring length 33mm outer black		
spare parts for	694065		
	No.	514390	Ref. No. —
	spring for door handle ø 6mm L 54mm W 27.5mm		
	No.	694734	Ref. No. —
	door handle L 165mm W 40mm H 25mm black		
	No.	694735	Ref. No. —
	cap ø 32mm black		
accessories for	694065		
	No.	694066	Ref. No. —
	door catch with spigot 2-stage L 28mm W 14mm H 15mm H1 16mm total length 51mm thread M8 thread L 23mm stainless steel		
	No.	694067	Ref. No. MCCHAGMX
	door catch with spigot 1-stage L 26mm total length 51mm thread M8		

producer-specific

COVEN

group 1








1

No.	694850	Ref. No.	MCPR3AMX
description	door catch with spigot 2-stage L 28mm W 14mm H 15mm H1 16mm total length 52mm thread M8		



1

No.	694065	Ref. No.	MCCHSAMX
description	door handle for headed units L 145mm W 40mm H 62mm spring length 33mm outer black		
spare parts for	694065		
	No.	514390	Ref. No. —
	spring for door handle ø 6mm L 54mm W 27.5mm		
	No.	694734	Ref. No. —
	door handle L 165mm W 40mm H 25mm black		
	No.	694735	Ref. No. —
	cap ø 32mm black		
accessories for	694065		
	No.	694066	Ref. No. —
	door catch with spigot 2-stage L 28mm W 14mm H 15mm H1 16mm total length 51mm thread M8 thread L 23mm stainless steel		
	No.	694067	Ref. No. MCCHAGMX
	door catch with spigot 1-stage L 26mm total length 51mm thread M8		

group 2



1









No.	694480	Ref. No.	MCPR2AMX
description	door catch with spigot 2-stage type DL24 L 42mm W 12mm H 18mm total length 62mm thread M8x1.25 thread L 20mm chrome-plated		
accessories for	694480		
	No.	694475	Ref. No. MCCHSAMX/2
	door handle for headed units bright finish type 1625L L 160mm W 39mm H 65mm spring length 30mm inner black plastic mounting distance 25mm flange 42x76mm mounting thread M5		

Table continues overleaf

accessories for 694480				
	No.	694476	Ref. No.	—
door handle for headed units matt finish type 1625 L 160mm W 39mm H 65mm spring length 30mm inner black/chrome plastic mounting distance 25mm flange 42x76mm mounting thread M5				






No.	694475	Ref. No.	MCCHSAMX/2
description door handle for headed units bright finish type 1625L L 160mm W 39mm H 65mm spring length 30mm inner black plastic mounting distance 25mm flange 42x76mm mounting thread M5			
accessories for 694475			
	No.	694477	Ref. No. —
door catch with spigot 1-stage type SL24 L 31.5mm W 12mm H 19.5mm total length 52mm thread M8x1.25 thread L 20.5mm chrome-plated			
	No.	694478	Ref. No. —
door catch with spigot 1-stage type SL42 L 31.5mm W 12mm H 19.5mm total length 67.5mm thread M8x1.25 thread L 36mm chrome-plated			
	No.	694479	Ref. No. —
door catch with spigot 1-stage type SL60 L 31.5mm W 12mm H 19.5mm total length 87mm thread M8x1.25 thread L 55.5mm chrome-plated			
	No.	694480	Ref. No. MCPR2AMX
door catch with spigot 2-stage type DL24 L 42mm W 12mm H 18mm total length 62mm thread M8x1.25 thread L 20mm chrome-plated			
	No.	694481	Ref. No. —
door catch with spigot 2-stage type DL42 L 42mm W 12mm H 18mm total length 78.5mm thread M8x1.25 thread L 36.5mm chrome-plated			
	No.	694482	Ref. No. —
door catch with spigot 2-stage type DL60 L 42mm W 12mm H 18mm total length 98mm thread M8x1.25 thread L 56mm chrome-plated			


edgemoat latches

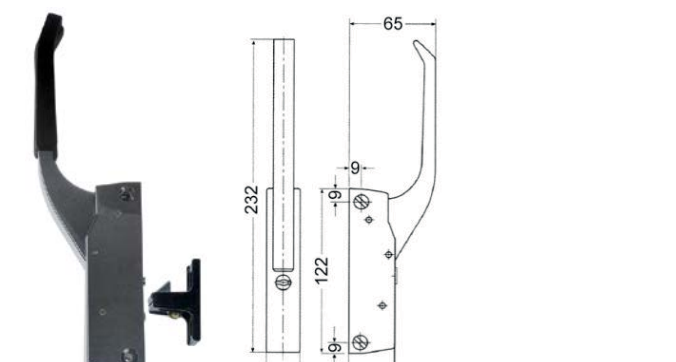

handle latches

CAFF/FERMOD

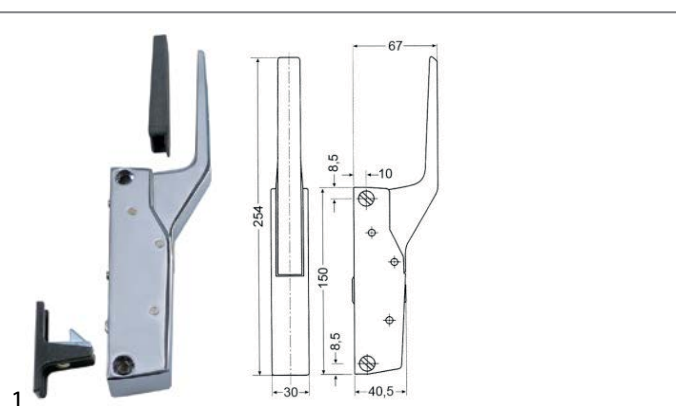

No.	700906	Ref. No.	MCCHIN04P
description catch L 122mm mounting distance 104mm heated units			
spare parts for 700906			
	No.	690419	Ref. No. —
door catch L 52mm W 20mm H 30mm mounting distance 26-37mm zamak for refrigeration units			
	No.	700062	Ref. No. —
handle protection heated units			



No.	701024	Ref. No.	MCCHIN04
description handle latch L 150mm mounting distance 133mm heated units type 790			
spare parts for 701024			
	No.	700061	Ref. No. MCCHINA04 MCCHNA04
door catch L 58mm W 20mm H 35mm mounting distance 42mm chrome-plated brass for headed units			
	No.	700062	Ref. No. —
handle protection heated units			

door catches



No.	700061	Ref. No.	MCCHINA04 MCCHNA04
description	door catch L 58mm W 20mm H 35mm mounting distance 42mm chrome-plated brass for headed units		
accessories for	700061		
No.	690414	Ref. No.	—
description	handle latch L 150mm mounting distance 133mm non lockable refrigeration units G 791		

snap locks

universal



No.	690596	Ref. No.	MCCHPI00
description	snap lock L 60mm W 15mm H 36mm mounting distance 48/28mm spring thickness 1.5mm complete with door catch zamak		

espagnolette locks

universal



No.	690041	Ref. No.	MCCHME10
description	cam L 148mm mounting distance 32mm		

shelves and shelf rails

grid attachments




No.	689001	Ref. No.	MCPR0003
description	bearing rail L 325mm H 15mm mounting pos. cavity W 15mm stainless steel for COVEN delivery pair		


gaskets

gaskets for heated units

window seals




No.	901380	Ref. No.	MCGV0003
description	window gasket profile 1883 Qty supplied by meter		




No.	900782	Ref. No.	MCGV0002
description	window gasket profile 1889 Qty supplied by meter		

door seals



No.	901381	Ref. No.	MCGP3/4P
description	door seal profile 2045 Qty supplied by meter		



No.	900778	Ref. No.	MCGPN004 / 470mm
description	door seal profile 2403 L 470mm Qty 1 mounting pos. vertical		

No.	901382	Ref. No.	MCGPN004 / 490mm
description	door seal profile 2403 L 490mm Qty 1 mounting pos. vertical		

No.	900781	Ref. No.	MCGPN004
description	door seal profile 2403 Qty supplied by meter		

No.	900779	Ref. No.	MCGPN004 / 600mm
description	door seal profile 2403 L 600mm Qty 1 mounting pos. horizontal		

No.	901326	Ref. No.	GUARNIPORTA106 MCGFC06N
description	door seal profile 2785 Qty supplied by meter		

No.	901383	Ref. No.	MCGPN004 / 700mm
description	door seal profile 2403 L 700mm Qty 1 mounting pos. horizontal		

No.	901169	Ref. No.	MCGP0002
description	door seal profile 2948 Qty supplied by meter		

No.	900780	Ref. No.	MCGPN004 / 890mm
description	door seal profile 2403 L 890mm Qty 1		

measuring equipment

thermometers

built-in thermometers

ø60mm

No.	541863	Ref. No.	EMTR0350
description	thermometer mounting ø 60mm 50-350°C probe ø 6mm probe L 19mm capillary pipe 1600mm		

consumables

sealants and adhesives

high temperature silicone



1

No.	890266	Ref. No.	CSR60902
description	high temperature silicone COLLEX RED SILICONE t.max. -40 up to +250°C red tube 80ml		
description	COLLEX RED SILICONE - tube 80ml - red In-situ flat gaskets for transmissions, compressors, pumps, manifolds, etc. Sealing joints for lighting devices and caulking for electric passages. Good resistance to motor oils, water and coolants. Temperature range -40°C to +250°C.		