## Professionale pentru echipamente profesionale






#### switches and momentary switches

#### rocker/momentary rocker switches

# 30x22mm No. 301061 Ref. No. A2100093 rocker switch mounting measurements 30x22mm orange 2NO 250V 16A illuminated connection male faston 6.3mm ambient temperature max. 125/55°C protection IP40



#### push/momentary push switches

#### 30x22mm



l	No.	301036	Ref. No.	A2800052	
l	description	protective cover internal size 30x22mm for rocker switch mounting			
ues	uescription	measurementsmm	1		

#### microswitches


#### pin-plunger actuated



No.	347757	Ref. No.	A2100297	
description		mperature max. 12	ICO connection male faston 5°C mounting distance 22mm	


#### relays


#### power relays



#### electronics


#### **PCBs**

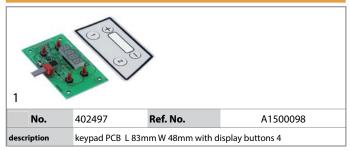

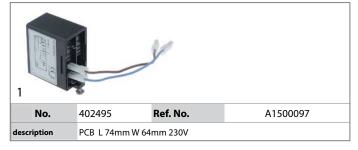

#### keypads

#### front foils








### condensators & interference suppression filters

#### operating capacitors



connection male faston 6.3mm 16.10.25. protection

#### equipment-specific units

#### for coffee grinders

#### grinding burrs

grinding burrs straight

#### standard




No.	527227	Ref. No.	A3200063
description	,	ing 3mm hole ø 5.5	nt D1 ø 63mm ID ø 38mm H mm bore ø 8.5mm mounting ø







springs					
group 1					
1					
No.	525110	Ref. No.	A3200049		
description	tension spring ø 7.5mm total length 42mm wire gauge ø 0.8mm L1 29mm				

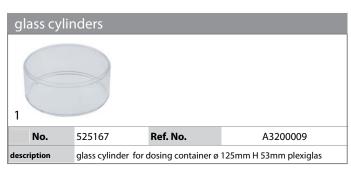


coffee p	coffee presses			
compone	ents			
holders				
No.	525113	Ref. No.	A3200002	
description bracket H 22mm L 65mm plastic				

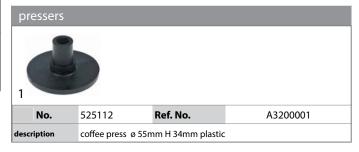










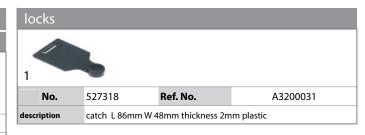

#### springs



