

Professionall

Solutii profesionale pentru echipamente profesionale



GAS COMPONENTS



ELECTRIC COMPONENTS



WATER TECHNOLOGY



MECHANICAL COMPONENTS




TOOLS








Spare parts suitable for






FAGE


heating elements

heating elements for pizza ovens

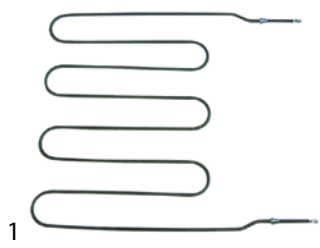			
No.	415959	Ref. No.	RES92
description	heating element 1750W 230V L 860mm W 160mm flange length 220mm flange width 30mm hole distance 200mm connection length 112mm connection M5 L3 810mm W1 25mm W2 110mm tube ø 10mm heating circuits 1 rectangular flange hole ø 4mm dry heating element		

			
No.	415941	Ref. No.	RES50
description	heating element 2000W 230V L 470mm W 506mm L1 30mm L2 50mm L3 390mm W1 18mm W2 470mm thread 1/4" mounting distance 461mm connection length 115mm connection M5 windings 4 tube ø 8.5mm heating circuits 1 dry heating element 2 hole fixing pizza oven		
spare parts for	415941		
	No.	510417	Ref. No. —
	flat gasket fibre ED ø 20mm ID ø 14mm thickness 2mm Qty 1 pcs		
accessories for	415941		
	No.	361182	Ref. No. —
	nut thread 1/4" H 5mm nickel-plated brass WS 17 Qty 1 pcs		
	No.	520228	Ref. No. —
	tooth lock washer ID ø 15.3mm ED ø 24mm steel Qty 1 pcs for thread M14		
	No.	550262	Ref. No. —
	flat gasket copper ED ø 20mm ID ø 14mm thickness 2mm		
	No.	560112	Ref. No. —
	plain washer ID ø 5.3mm ED ø 10mm thickness 1mm SS Qty 20 pcs DIN 125A for thread M5		
	No.	560132	Ref. No. —
	hexagonal nut thread M5 H 4mm WS 8 SS DIN/ISO DIN 934 / ISO 4032/8673 Qty 20 pcs		

			
No.	415942	Ref. No.	RES62
description	heating element 2280W 230V L 600mm W 610mm L1 30mm L2 50mm L3 520mm W1 20mm W2 570mm thread 1/4" mounting distance 561mm connection length 101mm connection M5 windings 4 tube ø 8.6mm heating circuits 1 dry heating element 2 hole fixing		
accessories for	415942		
	No.	361182	Ref. No. —
	nut thread 1/4" H 5mm nickel-plated brass WS 17 Qty 1 pcs		
	No.	510417	Ref. No. —
	flat gasket fibre ED ø 20mm ID ø 14mm thickness 2mm Qty 1 pcs		
	No.	520228	Ref. No. —
	tooth lock washer ID ø 15.3mm ED ø 24mm steel Qty 1 pcs for thread M14		
	No.	550262	Ref. No. —
	flat gasket copper ED ø 20mm ID ø 14mm thickness 2mm		

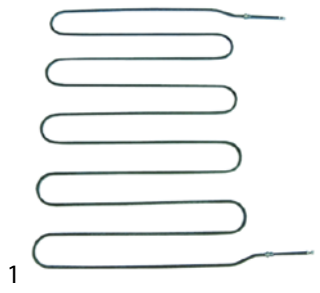			
No.	415947	Ref. No.	RES6292
description	heating element 3500W 230V L 580mm W 720mm L1 30mm L2 60mm L3 490mm W1 18mm W2 680mm thread 1/4" mounting distance 675mm connection length 120mm connection M5 windings 5 tube ø 8.5mm heating circuits 1 dry heating element 2 hole fixing		



thermostats

control and safety thermostats

EGO

control thermostats

55.10/19_ series



1

No.	375247	Ref. No.	EGO50092
description	thermostat t.max. 500°C temperature range 75-500°C 1-pole 1NO 16A probe ø 4mm probe L 228mm capillary pipe 900mm capillary pipe isolatedmm gland nut shaft ø 6x4.6mm shaft L 23mm shaft position upper rotation 270°		
For models:	50/2		

55.34_ series



1

No.	375027	Ref. No.	EGO500
description	thermostat t.max. 470°C temperature range 50-470°C 3-pole 3NO 16A probe ø 3.9mm probe L 308mm capillary pipe 990mm capillary pipe isolated 800mm gland nut shaft ø 6x4.6mm shaft L 23mm shaft position upper rotation 270°		



1

No.	375132	Ref. No.	EGO500
description	thermostat t.max. 500°C temperature range 50-500°C 3-pole 3NO 16A probe ø 4mm probe L 228mm capillary pipe 1200mm capillary pipe isolatedmm gland nut shaft ø 6x4.6mm shaft L 23mm shaft position upper rotation 270°		

switches and momentary switches

rocker/momentary rocker switches

30x11 mm



1

No.	301013	Ref. No.	INTLUCE
description	rocker switch mounting measurements 30x11mm black 1CO 250V 16A connection male faston 6.3mm ambient temperature max. 85/125°C protection IP40		

lamps

indicator lights

indicator lights (complete)

ø10mm

with plug-in socket



1

No.	359019	Ref. No.	LAM10mmR
description	indicator light ø 10mm green 400V connection male faston 6.3mm Qty 1 pcs		



1

No.	359020	Ref. No.	LAM10MMR
description	indicator light ø 10mm red 400V connection male faston 6.3mm Qty 1 pcs		

screw-on/push-on fit

light bulbs

for ovens



1

No.	359614	Ref. No.	LAME27
description	light bulb t.max. 300°C socket E27 230V 40W ø 45mm L 71mm lens L 44mm Qty 1 pcs		

oven lamps

producer-specific oven lamps

FAGE



1

No.	693486	Ref. No.	VETRO85
description	glass panel L 81mm W 81mm square thickness 4mm		

lamps

light bulbs



1

No.	359614	Ref. No.	LAME27
description	light bulb t.max. 300°C socket E27 230V 40W ø 45mm L 71mm lens L 44mm Qty 1 pcs		

contactors

TELEMECANIQUE (Schneider Electric)

power contactors



1

No.	380479	Ref. No.	CONT220V
description	power contactor resistive load 25A 230VAC (AC3/400V) 9A/4kW main contacts 3NO auxiliary contacts 1NO/1NC connection screw connection type LC1D09P7		

gas valves and ignition boxes








gas control valves

SIT

NOVASIT




1

No.	101187	Ref. No.	VALV 820
description	gas valve SIT series Novasit 820 0.17VHz gas inlet 1/2" gas outlet 1/2" thermocouple connection M9x1 pilot connection M10x1 ignition pressure bar pressure range 5-50mbar pressure regulator connection blind equiv. no. 0.820.301 supply Operator millivolt		
spare parts for	101187		
	No.	101065	Ref. No. —
magnet unit with cable L 44mm D1 ø 30mm D2 ø 20mm suitable for NOVASIT			
accessories for	101187		
	No.	100110	Ref. No. GRPILOTA
pilot burner SIT type 190 series 3 flames nozzle ømm gas connectionmm			
	No.	101305	Ref. No. —
gas connection straight 1/2" flange 45x45mm ELETROSIT/V4400/4600/4605 suitable for SIT/HONEYWELL hole distance 36x36mm			
	No.	101306	Ref. No. —
gas connection angled flange 45x45mm hole distance 36x36mm 1/2" ELETROSIT/V4400/4600/4605 screw with O-ring suitable for SIT/HONEYWELL			
	No.	101307	Ref. No. —
gas connection straight flange 45x45mm hole distance 36x36mm 3/4" ELETROSIT/V4400/4600/4605 screw with O-ring suitable for SIT/HONEYWELL			
	No.	101308	Ref. No. —
gas connection angled flange 45x45mm hole distance 36x36mm 3/4" ELETROSIT/V4400/4600/4605 screw with O-ring suitable for SIT/HONEYWELL			
	No.	102116	Ref. No. —
thermopile ROBERTSHAW L 900mm probe ø 9mm probe L 57mm 250-750mV screw connection 7/16"			

accessories



1

No.	100110	Ref. No.	GRPILOTA
description	pilot burner SIT type 190 series 3 flames nozzle ømm gas connectionmm		
accessories for	100110		
	No.	100202	Ref. No. —
pilot burner nozzle natural gas code 41 Qty 1 pcs nozzle ø 0.41mm			



accessories for		100110		
	No.	100203	Ref. No.	—
pilot burner nozzle LPG code 25 Qty 1 pcs nozzle ø 0.25mm				
	No.	100701	Ref. No.	—
ignition electrode connection M4 Qty 1 pcs				
	No.	100906	Ref. No.	—
screw connection thread M10x1 for ignition electrode brass Qty 1 pcs WS 10				
	No.	100907	Ref. No.	—
screw connection thread M10x1 Qty 1 pcs type SEF 1 ømm for thermocouple				
	No.	100908	Ref. No.	—
union screw thread M10x1 for pipe ø 4mm Qty 1 pcs				
	No.	100909	Ref. No.	—
union screw thread M10x1 for pipe ø 6mm Qty 1 pcs				
	No.	101282	Ref. No.	—
olive for pipe ø 4mm L 7.4mm Qty 1 pcs				
	No.	101287	Ref. No.	—
olive for pipe ø 6mm Qty 1 pcs				
	No.	102110	Ref. No.	—
pilot tube copper pipe ø 4mm thickness 1mm L 3000mm				
	No.	102111	Ref. No.	—
pilot tube copper pipe ø 6mm thickness 1mm L 3000mm				
	No.	107650	Ref. No.	—
pilot burner nozzle SIT LPG code 30 Qty 1 pcs				

ignition parts

pilot burners

SIT

100 series

accessories

ignition electrodes



No.	100707	Ref. No.	CANDELA
description ignition electrode D1 ø 7mm D2 ø 9mm connection ø2.4mm L1 14mm L2 6mm BL1 18mm BL2 3mm BL3 23mm to clip Qty 1 pcs			

190 series



1

No.	100110	Ref. No.	GRPILOTA	
description	pilot burner SIT type 190 series 3 flames nozzle ømm gas connecti-onmm			
accessories for	100110			
	No.	100202	Ref. No.	—
pilot burner nozzle natural gas code 41 Qty 1 pcs nozzle ø 0.41mm				
	No.	100203	Ref. No.	—
pilot burner nozzle LPG code 25 Qty 1 pcs nozzle ø 0.25mm				
	No.	100701	Ref. No.	—
ignition electrode connection M4 Qty 1 pcs				
	No.	100906	Ref. No.	—
screw connection thread M10x1 for ignition electrode brass Qty 1 pcs WS 10				
	No.	100907	Ref. No.	—
screw connection thread M10x1 Qty 1 pcs type SEF 1 ømm for thermocouple				
	No.	100908	Ref. No.	—
union screw thread M10x1 for pipe ø 4mm Qty 1 pcs				
	No.	100909	Ref. No.	—
union screw thread M10x1 for pipe ø 6mm Qty 1 pcs				
	No.	101282	Ref. No.	—
olive for pipe ø 4mm L 7.4mm Qty 1 pcs				
	No.	101287	Ref. No.	—
olive for pipe ø 6mm Qty 1 pcs				
	No.	102110	Ref. No.	—
pilot tube copper pipe ø 4mm thickness 1mm L 3000mm				
	No.	102111	Ref. No.	—
pilot tube copper pipe ø 6mm thickness 1mm L 3000mm				
	No.	107650	Ref. No.	—
pilot burner nozzle SIT LPG code 30 Qty 1 pcs				



electrodes



No.	100707	Ref. No.	CANDELA
description	ignition electrode D1 ø 7mm D2 ø 9mm connection ø2.4mm L1 14mm L2 6mm BL1 18mm BL2 3mm BL3 23mm to clip Qty 1 pcs		

ignition cables

pre-assembled cables



No.	102180	Ref. No.	CAVOACC
description	ignition cable cable length 1200mm connection ø2.4mm / ø2.4mm		

piezoelectric igniters

mounting diameter 22mm



No.	100013	Ref. No.	ACCND
description	piezoelectric igniter body plastic blowing mounting ø 22mm connection ø2.4mm cable lengthmm		

accessories for 100013



No.	100023	Ref. No.	—
female bullet size 2.3mm 0.5-1.5mm ² CuZn t.max. 125°C Qty 20 pcs			


thermocouples

plug-in thermocouples

plug-in thermocouples standard

with barrel socket ø6(6.5)mm

thermocouples SIT

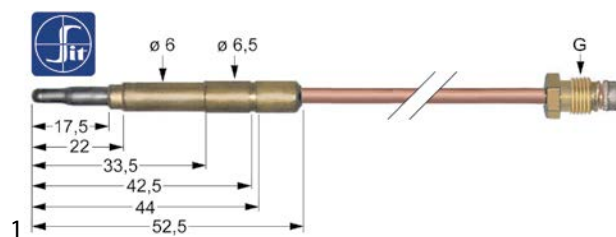

No.	107613	Ref. No.	TC1200MM
description	thermocouple SIT M9x1 L 1200mm plug connection ø6.0(6.5)mm		

gas burners

bar burners

bar burners



No.	105933	Ref. No.	BRUCSX
description	bar burner ø 50mm L 600mm flange length 57mm flange width 57mm Wmm Hmm mounting pos. left flange with bolt M5		

equipment-specific units

for pizza ovens

glass panels



No.	693485	Ref. No.	V25X10X4
description	glass panel L 250mm W 103mm thickness 5mm rectangular		

firebricks



1

No.	850096	Ref. No.	REF62
description	firebrick L 300mm W 300mm H 20mm delivery freight forwarding company only		




1

No.	850101	Ref. No.	RF300600
description	firebrick L 600mm W 300mm H 20mm grooved delivery freight forwarding company only		

knoobs

universal knobs



1

No.	110248	Ref. No.	MANTER
description	knob thermostat t.max. 500°C ø 50mm shaft ø 6x4.6mm shaft flat upper black temperature range 50-500°C rotation 270°		

producer-specific knobs

FAGE



1

No.	111935	Ref. No.	MANTER
description	knob thermostat t.max. 450°C ø 45mm shaft ø 6x4.6mm shaft flat upper black temperature range 65-450°C rotation 270°		



1

No.	110248	Ref. No.	MANTER
description	knob thermostat t.max. 500°C ø 50mm shaft ø 6x4.6mm shaft flat upper black temperature range 50-500°C rotation 270°		

handles and hand wheels

cylindrical handles

fixed



1

No.	540238	Ref. No.	IMPUCIL
description	cylindrical handle thread M10 ø 26mm L 80mm		

ball handles



1

No.	693488	Ref. No.	SFERAS40
description	ball handle thread M10 ø 34mm black		

bracket handles



1

No.	700551	Ref. No.	MANGAS MANMS180
description	pull handle L 200mm H 62mm mounting distance 179mm handle M8		

measuring equipment

thermometers

built-in thermometers

ø60mm



No.	541054	Ref. No.	TER500
description	thermometer mounting ø 60mm t.max. 500°C 0 up to +500°C probe ø 10mm probe L 80mm capillary pipe 700mm		