Professionale pentru echipamente profesionale



Spare parts suitable for

FIORENZATO-C.S.

heating elements


heating elements for coffee machine



No. 417354 **Ref. No.** A2100146

description

heating element 2700W 230V heating circuits 3 mounting ø 42mm hole distance 74mm L 160mm W 34mm H 45mm L1 20mm L2 70mm L3 80mm H1 32mm H2 13mm hole ø 10mm tube ø 8.3mm thermostat sleeves ø 7mm length thermostat sleeves 140mm thermostat sleeve centre number of thermostat sleeves 1 connection male faston 6.3mm immersion heater 2 hole flange

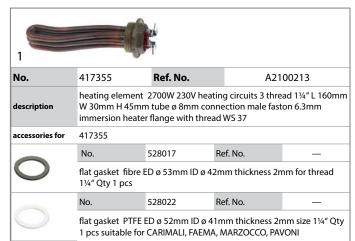

1		- [k			
No.	417353	Ref. No.	A21	00031	
description	heating element 3500W 230/400V heating circuits 3 mounting ø 43mm hole distance 74mm L 295mm W 34mm H 45mm L1 35mm L2 55mm L3 205mm H1 31mm H2 14mm hole ø 9.5mm tube ø 8.3mm thermostat sleeves ø 7mm length thermostat sleeves 210mm thermostat sleeve centre number of thermostat sleeves 1 connection male faston 6.3mm immersion heater 2 hole flange				
accessories for	417353				
0	No.	528021	Ref. No.	A1200015	
	flat gasket PTFE ED ø 53mm ID ø 42.5mm thickness 3mm Qty 1 pcs equiv. no. 12001/02286 suitable for Astoria/Aurora/Brasilia/Wega				


1					
No.	417352	Ref. No.	A2100120		
description	43mm hole diss L2 55mm L3 45 8.3mm thermo thermostat slee	heating element 4000W 230/400V heating circuits 3 mounting ø 43mm hole distance 74mm L 545mm W 34mm H 45mm L1 35mm L2 55mm L3 455mm H1 31mm H2 14mm hole ø 9.5mm tube ø 8.3mm thermostat sleeves ø 7mm length thermostat sleeves 210mm thermostat sleeve centre number of thermostat sleeves 1 connection male faston 6.3mm immersion heater 2 hole flange			

accessories

sealing washers



No.	528021	Ref. No.	A1200015
description	_		mm thickness 3mm Qty 1 pcs



thermostats

bi-metal thermostats

bi-metal thermostats



No.	390328	Ref. No.	A1400035
description	bi-metal thermosta 1-pole 16A connec		n switch-off temp. 152°C 1NC

switches and momentary switches


rocker/momentary rocker switches

30x22mm



No.	301061	Ref. No.	A2100093
description		nnection male fast	nts 30x22mm orange 2NO 250V on 6.3mm ambient temperature





1				
No.	301078	Ref. No.	A21	00038
description	momentary rocker switch mounting measurements 30x22mm black 2NO 250V 16A momentary 0-I connection male faston 6.3mm ambient temperature max. 85/125°C protection IP40			
accessories for	301078			
1	GEV No.	301036	Ref. No.	A2800052
	protective cover internal size 30x22mm for rocker switch mounting measurementsmm			

1				
No.	346144	Ref. No.	34	0226
description	push switch mounting measurements 30x22mm white 2CO 250V 16A illuminated connection male faston 6.3mm ambient temperature max. 100/55°C protection IP65			
accessories for	346144			
	GEV No.	301036	Ref. No.	A2800052
	protective cover internal size 30x22mm for rocker switch mounting measurementsmm			

push/momentary push switches

<u>19x13mm</u>




No.	3472921	Ref. No.	A2100043
description		3	ts 19x13mm red 2NO 250V 16A .3mm ambient temperature
	max 105/55°C protection IP65 with cover cap		


¹illuminated

30x22mm No. 301036 Ref. No. A2800052 description protective cover internal size 30x22mm for rocker switch mounting measurementsmm

No. 347295 Ref. No. A2100041 push button mounting Ø 25mm black 2NO 250V 16A connection male faston 6.3mm ambient temperature max. 85°C protection IP40




¹illuminated

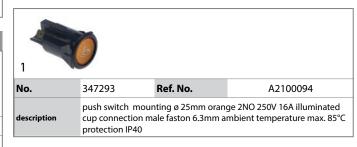


microswitches

pin-plunger actuated No. 346145 Ref. No. 210031 microswitch with plunger 250V 10A 1CO connection male faston 4.8mm ambient temperature max. 125°C mounting distance 22mm black







with plug-in socket 1 No. 359140 Ref. No. A2100046 description indicator light Ø 10mm yellow 230V connection male faston 6.3mm Qty 1 pcs

contactors

ISKRA (FANAL)





No.	380413	Ref. No.	21003F
description		auxiliary contacts	00VAC (AC3/400V) 8.5A/5.5kW 1NC connection screw connec-

rotary switches

1	leous		
No.	347296	Ref. No.	A2100103 A2100316
description	rotary switch 25A	shaft L 15mm with	cable 6-pole shaft 5x5mm

control equipment

MOELLER/EATON

LED signal elements



No.	346487	Ref. No.	A2100319
description	indicator lamp white connection screw LED 85-264VAC		

lamps

indicator lights

indicator lights (complete)					
ø 6mm	ø 6mm				
1					
No.	359568 Ref. No. A2100024				
description	indicator light ø 6mm 230V red connection male faston 2.8mm cable length 250mm				

SIEMENS

power contactors



No.	380526	Ret. No.	A2100154
		auxiliary contacts	30VAC (AC3/400V) 8.4A/4kW connection screw connection





relays

power relays

with bracket mounting



No.	380920	Ref. No.	A3200109
description			O connection male faston

level relays

GICAR



No.	400524	Ref. No.	A1500005
description	level relay 230V vo	oltage AC connection	on F6.3 type RL30 MICRO ST


DTI




No.	402445	Ref. No.	A1500082
description		80V voltage AC 50/6	0Hz 8A connection F6.3 type
u co cp u.o	DCLDD11000		

electronics

PCBs

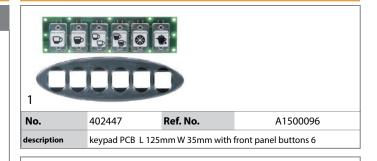



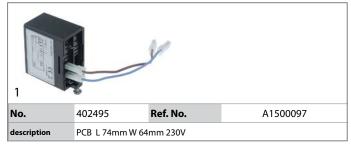

central units







No.	402454	Ref. No.	A1500070	
description	central unit 3-group 230V type SDE3D FI3NAV6			

dosing electronics


miscellaneous




No.		402455	Ref. No.	A1500073
descri	ption	dosing electronics	230V 50/60Hz type	e SDE11

keypads


front foils





No.	402450	Ref. No.	A1500059
description	keypad foil grey L	164mm W 34mm b	outtons 6





keypad units



No.	402448	Ref. No.	A1500092	
description keypad unit buttons 2 L 88mm W 60mm			mm	





ı	No.	402449	Ret. No.	A1500091
	description	keypad unit coffee	e machine FIORENZ	ATO buttons 6 L 88mm W

solenoid valves

solenoid valves (water)

metal

ODE

solenoid valves steam (water


21A series




No.	370573 Ref. No. A1900002			00002
description	solenoid valve brass 2-ways 230VAC inlet 1/8" outlet 1/8" connection 1/8" L 40mm DN 2.5mm -10 up to 140°C type series 21A coil type ADA membranes FKM (water/steam) p max 14bar 50Hz			
accessories for	370573			
No. 371091 Ref. No.		_		
1	power socket pl	ug type DIN 43650	B cable lengthmr	n small












pressure switches






No.	541725	Ref. No.	A2100051
description	pressure control ø 38mm pressure range 0.5-1.2bar 21 nection 1/4" 1CO pressure connection 1/4"		5



electrodes





motors

motors

for coffee grinders

components



No.	500239	Ref. No.	190067 270012
description	motor 230V 50Hz 16mm type T48	1 phase ø 100mm I	D ø 65mm H 195mm shaft ø





condensators & interference suppression filters

operating capacitors



equipment-specific units


for espresso machines

filter holders filter holders standard filter holders (complete) 1 No. 525097 Ref. No. A2200079 description filter holder 2-way complete ID ø 61.8mm outlet distance 55mm mounting ø 82.4















(0)

with upstand No. 528417 Ref. No. A2200031 description shower screen Ø 58mm H 19mm

filter holder gaskets flat with internal notch No. 525105 Ref. No. A1200181 description filter holder gasket with inside notch D1 ø 72mm D2 ø 56mm H 8mm with inside notch Qty 1 pcs



























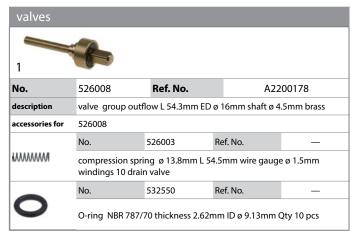






















drain pans drain pans 1 No. 527946 Ref. No. A1600002 description drain pan L 69mm W 79mm H 54mm hose ø 14mm









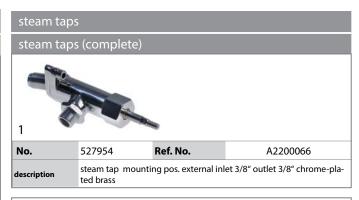




miscellaneous					
1					
GEV No.	526017	Ref. No.	A2200203		
description	gasket support D1 ø 16mm D2 ø 10mm ID ø 7mm L 25mm square brass				




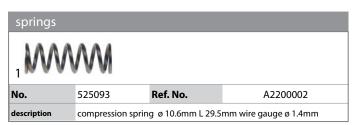


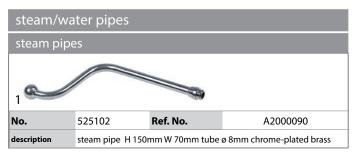















accessories						
gaskets	gaskets					
10	10					
No.	528402	Ref. No.	A1200030			
description	O-ring Viton thickness 2.62mm ID ø 10.78mm Qty 1 pcs					




union nuts					
1					
No.	528826	Ref. No.	A2200036		
description	union nut thread 3/8" L 21mm hole ø 12.5mm chrome-plated brass				

gaskets	5				
flat gaskets					
rubber g	askets				
10					
No.	525107	Ref. No.	A1200155		
description	flat gasket ru	flat gasket rubber ED ø 16mm ID ø 8mm thickness 4mm Qty 1 pcs			





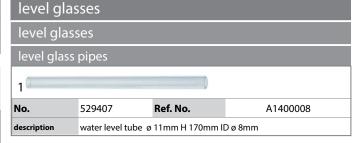






non-return valves pistons No. 526009 Ref. No. A2200215 description piston for non-return valve with O-ring ø 12mm L 20mm

Complete No. 529335 Ref. No. A1300056 description non-return valve inlet 1/8" outlet 1/8" L 30mm




for coffee grinders grinding burrs grinding burrs straight standard

No.	527227	Ref. No.	A3200063
			260001
			260003
description		ing 3mm hole ø 5.5	nt D1 ø 63mm ID ø 38mm H mm bore ø 8.5mm mounting ø


























springs						
group 1						
10	10					
No.	525110	Ref. No.	A3200049			
description	tension spring ø 7.5mm total length 42mm wire gauge ø 0.8mm L1 29mm					
























bottom			
	K		
No.	527503	Ref. No.	340196
description	star mounting pos. centre/bottom		

































protection caps No. 527319 Ref. No. 160067 description protection cap ø 60mm suitable for FIORENZATO plexiglas



locks				
1	6			
No.	527318	Ref. No.	160063 A3200031	
description	catch L 86mm W 48mm thickness 2mm plastic			





knobs

steam/water taps steam/water taps No. 111328 Ref. No. A1600012 description turning handle ø 44mm shaft ø 6x8mm black

handles and hand wheels

cone handles




star handles



equipment feet and end caps


equipment feet with stem

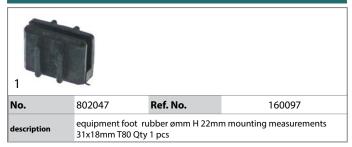






gaskets


description



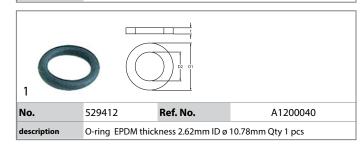











sealing washers


rubber gaskets No. 525107 Ref. No. A1200155 description flat gasket rubber ED ø 16mm ID ø 8mm thickness 4mm Qty 1 pcs



















mechanical components, equipment accessories



springs

compression springs

No.	527504	Ref. No.	230023
description	compression sprin	g ø 10.3mm L 60m	m wire gauge ø 1.3mm

WWW

No.	525093	Ref. No.	A2200002	
description	compression spring ø 10.6mm L 29.5mm wire gauge ø 1.4mm			



No.	525092	Ref. No.	A2200001
description	compression spri	ng ø 12mm L 15mm	n wire gauge ø 1.5mm


No.	526561	Ref. No.	A2200192
description compression spr		a a 1/1 3mm 21m	m wire gauge & 1 8mm


No. 526560 Ref. No. A2200177 description compression spring Ø 14.3mm L 46mm wire gauge Ø 1.5mm


MAAAAA .					
No.	527935	Ref. No.	A2200209		
description	compression	compression spring ø 14.6mm L 33mm wire gauge ø 2mm			




manometers



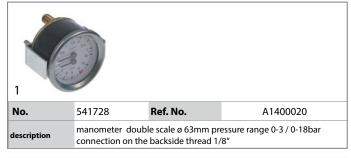







fastening material

screws					
countersunk screws					
1					
No.	560215	Ref. No.	A1100187		
description	countersunk screw thread M5 L 14mm SS DIN 963/ISO 2009 Qty 20 pcs intake slotted head ø 9.2mm				

