
# Professionale pentru echipamente profesionale



# heating elements

#### heating elements for tilting bratt pan



#### thermostats

#### control and safety thermostats

#### EGO

#### safety thermostats



safety thermostat switch-off temp. 650°C 3-pole starting tempera-

#### control thermostats with operation switch

#### 55.34\_ series

description



thermostat t.max. 470°C temperature range 100-470°C 1-pole 1NO 16A probe ø 3.9mm probe L 228mm capillary pipe 1110mm capillary description pipe isolated 600mm gland nut shaft ø ø6x4.6mm shaft L 24mm shaft position upper rotation 270° outer switch 2NO

# lamps

#### indicator lights

#### indicator lights 3-piece (housing, lens and bulb)

#### neon light bulbs



•						
	No.	359585	Ref. No.	302	40300	
description		neon light bulb socket E10 230V green ø 10mm L 28mm				
accessories for		359585				
-		No.	359060	Ref. No.	_	
-		lamp socket mou	unting measurem	ents ø16.2mm soc	ket E10 connec-	
-		No.	359685	Ref. No.	_	

lamp socket mounting measurements ø16.2mm socket E10

#### screw-on/push-on fit

## neon light bulbs



1		
	No.	3595

1				
No.	359585	Ref. No.	302	40300
description	neon light bulb	socket E10 230V g	reen ø 10mm L 28	mm
accessories for	359585			
-	No.	359060	Ref. No.	_
	lamp socket mounting measurements ø16.2mm socket E10 connection screw			
Direct	No.	359685	Ref. No.	_
0	lamp socket moi	inting measurem	ents ø16 2mm soc	ket F10



lamp socket mounting measurements ø16.2mm socket E10

#### universal oven lamps

#### mounting diameter 35.5mm



No.	359723	Ref. No.		5.0002 5.0004	
description	oven lamp glass thr.ø 33.5mm ø 51mm borosilicate glass tempre-sist. 550°C				
accessories for	359723				
	No.	359721	Ref. No.	_	

gasket silicone ED ø 48mm ID ø 39.5mm thickness 5mm Qty 1 pcs





#### electronic controllers

#### **ELIWELL**

#### universal controllers

#### built-in version



No.

No.

No.

No.	378303	Ref. No.	40.01.360		
description	ments 71x29mm 2	controller ELIWELL type IDPlus 902 mounting measure- 29mm 230V voltage AC NTC/Pt1000/PTC relay outputs 8/ 150°C display 3 digits + algebraic sign			
accessories for	378303				

No.	379052	Ref. No.	_
	up to +180°C pro	ble silicone probe be ø6x40mm cabl	

379053

379064

379142

temperature prob	oe PTC 1kOhm ca	ble PVC probe -50	up to +150℃
cable -10 up to 10	00°C probe ø6x30	mm cable length	3m without
screw connection	2-wire		

Ref. No.

Ref. No.

Ref. No.

temperature probe PTC 1kOhm cable silicone probe -50 up to +150°C cable -50 up to +180°C probe ø6x40mm cable length 3m without screw connection 2-wire

temperature probe PTC 1kOhm cable PVC probe -50 up to  $+150^{\circ}$ C cable -10 up to 100°C probe ø6x30mm cable length 1.5m without screw connection 2-wire

379160 Ref. No. Nο temperature probe NTC 10kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x14mm cable length 1.5m without screw connection 2-wire

379161 Ref. No. temperature probe NTC 10kOhm cable thermoplastic probe -40 up

to  $+110^{\circ}$ C cable -40 up to  $+110^{\circ}$ C probe ø6x14mm cable length 3m without screw connection 2-wire 379162 Ref. No.

temperature probe NTC 10kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x14mm cable length 6m

379169 Ref. No. No.

temperature probe NTC 10kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x14mm cable length 2m without screw connection 2-wire

Ref. No. No.

temperature probe PTC 1kOhm cable PVC probe -50 up to +150°C cable -10 up to 100°C probe ø6x30mm cable length 5m without screw connection 2-wire

No. 379343 Ref. No.

temperature probe NTC 10kOhm cable silicone probe -40 up to +110°C cable -50 up to +180°C probe ø6x40mm cable length 3m 2-wire


379458 No. temperature probe NTC 10kOhm cable silicone probe -40 up to +110°C cable -50 up to +180°C probe ø6x40mm cable length 1.5m without screw connection 2-wire

379630 Ref. No. No.

temperature probe NTC 10kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x14mm cable length 2.5m without screw connection 2-wire resistor 10kOhm

#### probes

#### producer-specific probes



1	-			
No.	378279	Ref. No.	40.02.045	
description	core temperature probe thermocouple K (NiCr-Ni) cable PTFE probe -40 up to +250°C cable -40 up to +250°C connection 2-wire probe ø3.5x100mm cable length 2.6m handle ø 10mm handle length 40mm			

#### flow meters and flow sensors



#### fans

#### hot air motors





#### motors




gear motor CROUZET type 82841042 12V voltage DC shaft ø 4mm L

# gas burners



description

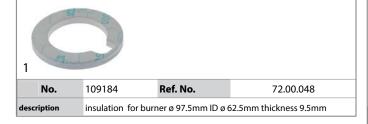

65mm W 50mm H 51mm for oven

# equipment-specific units

## for tilting bratt pans



# gaskets

#### special gaskets



# hose reels and spray guns

#### spray guns









# ancillary products

# clamps

#### double wire clamps



NO.	505351	Ket. No.	2066.0527V
escription	wire clamp ø 11.6 Oty 100 pcs	-12.2mm wire gaug	e ø 1.5mm zinc-coated steel

# fastening material

# fasteners

## clamps

## double wire clamps



No.	505351	Ref. No.	2066.0527V	
description	wire clamp ø 11.6-12.2mm wire gauge ø 1.5mm zinc-coated Qty 100 pcs			

# consumables

# sealants and adhesives

# high temperature silicone



No.	890107	Ref. No.	50060200 50060207	
description	high temperature silicone TOMABOND TB76 -40 up to +250°C red/brown tube 90ml			
description	Special elastic sil with high therma H	I loads. TB 76 is prir IVAC and mechanic	onding & sealing applications marily used in building services,	

