
Professionale pentru echipamente profesionale




heating elements

heating elements for coffee machine




1			
No.	417121	Ref. No.	N/A
description	circuits 1 connections H 40mm immersion	on M6 hole distanc	ing ø 42mm L 406mm heating e 55mm hole ø 10mm W 39mm im 3 hole flange L1 40mm L2 EM, VISACREM


1						
No.	417123	Ref. No.	N/A			
description	circuits 1 connections H 43mm immersion	on M6 hole distanc on heater tube ø 8m	ing ø 42mm L 580mm heating e 56mm hole ø 10mm W 40mm nm 3 hole flange L1 45mm L2 EM, VISACREM H1 8mm H2			





1	#		
No.	526629	Ref. No.	ES9190.297.00A
description	hole distance 51m thermostat sleeves of thermostat sleev	m L 125mm W 35m s 120mm thermosta ves 1 thermostat sle	g circuits 1 mounting ø 40mm ım H 31mm hole ø 9mm length at sleeves ø 6mm number eeve eccentric, clinging/not e faston 6.3mm immersion

1					
No.	417120	Ref. No.	1	N/A	
description	heating element 1500W 230V heating circuits 1 mounting ø 42mm hole distance 56mm L 190mm W 20mm H 40mm hole ø 9mm con- nection M6x1 immersion heater 3 hole flange suitable for ITALCREM, VISACREM				
accessories for	417120				
۵	No.	528008	Ref. No.	N/A	
	gasket ID ø 30mm fibre thickness 3mm hole ø 9mm hole distance 44mm for heating element coffee machine parts				






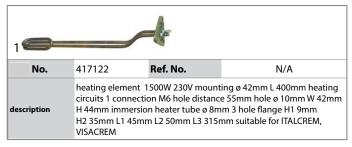









1	- (The same of the sa	
No.	417022	Ref. No.	N/A
description	hole distance 52m	m L 228mm W 36m	g circuits 3 mounting ø 40mm ım H 34mm hole ø 6mm tube nm immersion heater 6 hole


No.	417349	Ref. No.	N/A			
description			g circuits 3 mounting ø 40mm m H 30mm immersion heater			



1						
No.	417124	Ref. No.	N/A			
description	circuits 1 connecti H 42mm immersio	on M6 hole distanc In heater tube ø 8m	ting ø 42mm L 545mm heating e 57mm hole ø 10mm W 40mm nm 3 hole flange L1 45mm L2 EM, VISACREM H2 20mm			


1		#	
No.	417105	Ref. No.	02212538
description	hole distance 74n L3 400mm H1 25n stat sleeves ø 7.5n sleeve eccentric, i	nm L 530mm W 28m mm H2 25mm hole o mm length thermost non clinging numbe	g circuits 2 mounting ø 42mm nm H 50mm L1 30mm L2 75mm ø 9mm tube ø 8.4mm thermo- tat sleeves 185mm thermostat or of thermostat sleeves 1 con- flange suitable for FAEMA

1		(E			
No.	417020	Ref. No.	1	N/A	
description	hole distance 431	mm L 350mm W 3	ting circuits 3 mou 2mm H 30mm ho am immersion hea	le ø 9mm tube ø	
accessories for	417020				
	No.	528007	Ref. No.	N/A	
\bigcirc	flat gasket PTFE ED ø 50mm ID ø 40mm thickness 2.5mm Qty 1 pcs				
	No.	528965	Ref. No.	_	
\circ	flat gasket FIBER	ED ø 50mm ID ø 4	40mm thickness 3	mm Qty 1 pcs	






1		· ·	
No.	526624	Ref. No.	11003363
description	ø 40mm hole dista sleeves ø 7mm len mostat sleeves 1 th	ince 51mm L 405m gth thermostat slee nermostat sleeve ce	10V heating circuits 3 mounting m W 33mm H 33mm thermostat eves 140mm number of ther- entre not clinging tube ø 8mm rsion heater copper

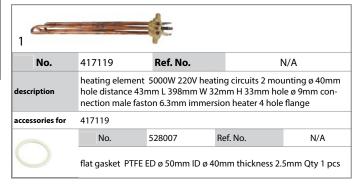










heating cartridges








flow heaters

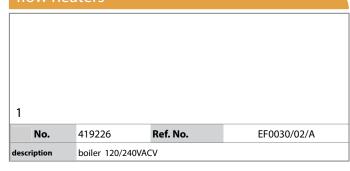

accessories











thermostats


bi-metal thermostats

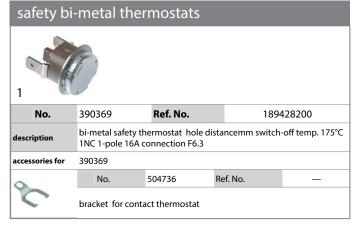







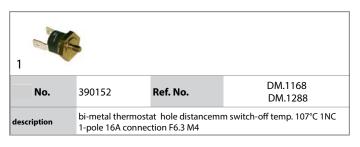

control and safety thermostats

EGO

safety thermostats



No.	390696	Ref. No.	5008006000
description	,	oillary pipe 880mm	53°C 1-pole 1NC probe ø 6mm capillary pipe isolated 880mm

E-6-0 Ref. No. 07476906 No. 390324 safety thermostat switch-off temp. 169°C 3-pole 3NC 20A probe ø



IMIT / TEMPOMATIC / ARTHERMO No. 390339 Ref. No. DM687 thermostat temperature range 30-120°C 1-pole 1CO 15A probe ø description 6.5mm probe L 85mm capillary pipe 900mm capillary pipe isolatedmm gland nut 250V

switches and momentary switches

rocker/momentary rocker switches

30x22mm



1					
No.	301001	Ref. No.		5008	002000
description	illuminated 0-I	mounting measu connection mal protection IP65			ed 2NO 250V 16A ent temperature
accessories for	301001				
0	No.	301036	Ref. No.		_
	protective cover internal size 30x22mm for rocker switch mounting measurementsmm				

1			
No.	347252	Ref. No.	DM1362/RO
description	rocker switch mounting measurements 30x22mm red 2-pole 2NO 250V 10A + lamp cup connection male faston 6.3mm		


push/momentary push switches


19x13mm



No.	347261	Ref. No.	WGA4001080000
description	element holder VA	connection suitab	le for switch 19x13









No. 345162¹ Ref. No. WGADM2104 Bush switch mounting Ø 25mm yellow 2NO 250V 16A illuminated connection male faston 6.3mm ambient temperature max. 85°C protection IP40


illuminated


miscellaneous No. 347417 Ref. No. 12001020 push switch mounting measurements 19x13mm white 2NO 250V 16A connection male faston 6.3mm ambient temperature max. 125/55°C protection IP40

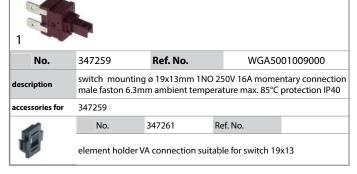



system switches (ROLD)






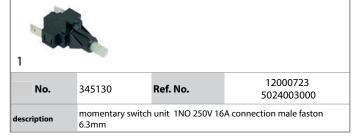












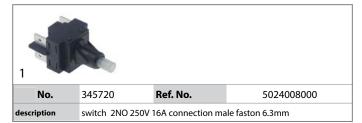

rotary switches

BREMAS

A1700 series



No.	347487 ¹	Ref. No.	N/A
deccrintion	,		4 type CA0200006P2 400V 25A uare connection screw

¹incl. knob and dial plate

A2000 series



No.	346054	Ref. No.	N/A
description	rotary switch 1-0-2 positions 4-pole	2 20A shaft ø 5x5m	m shaft L 24mm 3 operating

A2500 series

No.	347251	Ref. No.	WGADM1944
description		n shaft L 27mm sha	ts 6 type CS0258542 600V ft square connection screw 4

accessories



No.	111012	Ref. No.	12000822
leccrintion	knob switch zero flat black H 22mm		34/60mm shaft ø 5x5mm shaft

DM0781 No. 347604 Ref. No. P310802 rotary switch 40-1-2-3 sets of contacts 6690V 32A shaft ø 5x5mm description shaft L 27mm shaft square kit connection cable 347604 spare parts for No. 347251 WGADM1944 Ref. No. rotary switch 4 0-1-2-3 sets of contacts 6 type CS0258542 600V 32A shaft ø 5x5mm shaft L 27mm shaft square connection screw 4

miscellaneous No. 347253 Ref. No. DM0781 rotary switch 0-1-2 25A shaft L 21mm connection screw ø 43mm 6-pole P300802 VM shaft 5x5mm

lamps

indicator lights

indicator lights (complete)

operating positions

ø 9mm





1			
No.	359135	Ref. No.	5008005000
description	indicator light ø 9 tempresist. 120°C		ection male faston 6.3mm

1	D			
No.	359484	Ref. No.	5027013000	
description		indicator light ø 9mm 240V blue connection plug-in connection tempresist. 120°C		

No. 359202 Ref. No. WGA5001012000 description indicator light Ø 25mm 230V red connection male faston 6.3mm







contactors

ABB



relays

power relays



level relay

GICAR



No.	402103	Ref. No.	DM1940/04
description	level controller 23 NRL30/1E-2C/F	0/240V voltage AC	50/60Hz connection F6.3 type



No.	402331	Ref. No.	WGADM1940
description	level controller 23 6.3mm type RL30/		0Hz 5A connection male faston






No.	402332	Ref. No.	5008003000
description		er 230V voltage AC 50/6 type RL0 1E/1S/4C/F	50Hz 10/5/16A connection male

electronics

PCBs





central units












dosing electronics




keypads

keypad units















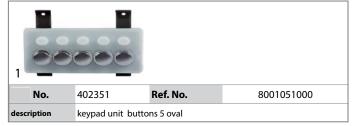

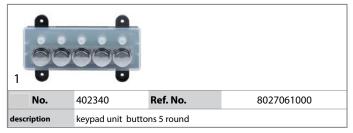

accessories





solenoid valves

solenoid valves (water)

metal

PARKER

F-1/6 caria



No.	370679	Ref. No.	DM1197 DM1197/220/5060
description		° úp to 130°C PARKI	ction 1/4" DN 1.5mm slide-on ER type series VE146V coil type 40bar



•			
No.	370564	Ref. No.	WGADM2115
description	L 40mm DN 2.5mn	n slide-on receptacl coil type ZB09 men	/4" outlet 1/4" connection 1/4" le DIN -20° up to 130°C PARKER nbranes FKM (water) p max

3-way

VE-128 series



No.	370057	Ref. No.		WGAI	DM0647		
description	receptacle DIN	solenoid valve 3-ways 230VAC body outer cone DN 1.2mm slide-on receptacle DIN -20° up to 140°C PARKER type series VE-128 coil type ZB09 membranes ruby p max 10bar brass flange 32x32mm					
spare parts for	370057						
۵	No.	370062	Ref. No		_		
	solenoid valve	solenoid valve body PARKER 3-ways outer cone					
	No.	371029	Ref. No		_		
2		solenoid coil PARKER 230VAC 9VA coil type ZB09 seat ø 14mm H 33mm W 34mm D 43mm					
accessories for	370057						
SCastel A	No.	371090	Ref. No		_		
	power socket plug type DIN 43650A screw						
	No.	371095	Ref. No		_		
0	11.53	nickness 1.78mm			cs		





Solenoid valve - accessories




pressure switches

for coffee machines



pressure connection 1/4"



pumps

booster pumps II


pump heads FLUID-O-TECH



1						
No.	500064	Ref. No.		N/A		
description	pump head PO204 FLUID-O-TECH L 82mm 2001/h connection 3/8" GAS with bypass brass clip connection for coffee machine shaft ø 4.8x11mm					
accessories for	500064	500064				
	No.	520126	Ref. No.	_		
\bigcirc	clamp for pump	o/motor				


vibration pumps


















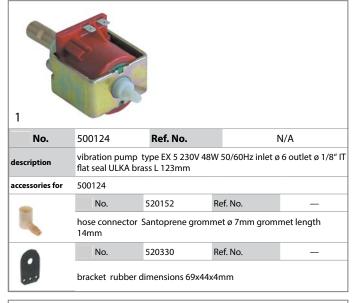



equipment-specific units



filter holders filter holders standard 8027086000 525974 No. Ref. No. filter holder with outlet, 2-fold suitable for GAGGIA ID ø 61mm outlet description distance 48mm mounting ø 79








1 No. 525979 Ref. No. N/A description filter holder suitable for GAGGIA without outlet mounting ø 79mm outlet 3/8" ID ø 61.4mm wedge hight 10mm wedge position diagonal number of wedges 2 lever straight




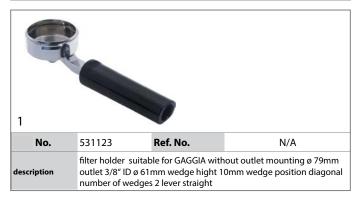





handles						
with external thread						
1	(1)					
No.	531187	Ref. No.	8001061000 Original			
description	handle for filter holder ø 30mm thread M10x1.5 thread L 18mm L 125mm black plastic/rubber					











description

of coffee 7g SS








filter holder springs					
1					
No.	531243	Ref. No.	WGA25G0075		
description	filter holder spring L 70mm W 60mm wire gauge ø 1.3mm for espresso filter holder Qty 20 pcs				



screws					
1 6					
No.	560397	Ref. No.	WGADI0964-5X8I		
description	oval head screw thread M5 thread L 5mm stainless steel Qty 1 pcs head ø 9mm L 8mm				
filter hold	ler gaskets				
flat					





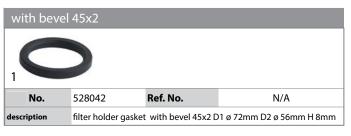





filter holder supports Ref. No. No. 698785 8G251 description bracket ED ø 39.5mm ID ø 14.5x31mm H 26mm for filter holder

water dispersions

water dispersions

group 3



water distributor $\,$ ø 58.3 / 53.4mm H 15.5mm 4 holes hole ø 1.75mm description thread M5 mounting ø 6.6mm bore ø 10.4mm brass safety valves

safety valves



No.	526645	Ref. No.	WGADM2184/A	
description	safety valve connection 3/8" triggering pressure 1.8bar			

1	-		
No.	526649	Ref. No.	8008016000
description	safety valve conne	ection 3/8" triggerin	ng pressure 1.9bar L 70mm hose

529308 Ref. No. WGADM1380/003 No. safety valve connection M19x1 triggering pressure 1.8bar description

expansion valves						
with hose	with hose connection					
1						
No.	526650	Ref. No.	WGADM0262/003			
description	expansion valve T1: 3/8" IT hose ø 7mm triggering pressure 11bar L 70mm					



















aerators and air bleeders						
1						
No.	529303	Ref. No.	WGA	DM2186		
description	aerator and air bl	eeder connectio	n 1/4" only steam			
spare parts for	529303					
	No.	528687	Ref. No.			
0	O-ring Viton thic	kness 1.78mm ID	ø 3.69mm Qty 1 p	ocs		




steam/	water taps				
steam/water taps					
steam/w	ater taps				
1	6				
No.	526641	Ref. No.	RB0740/A		
description	tap body mounting pos. left/right steam/water				

























nozzles for steam pipes 1 No. 526672 Ref. No. 8301006000 description steam nozzle ø 17mm L 85mm 1 holes plastic for pipe ø 6mm


nozzles for water pipes nozzles for water pipes No. 526637 Ref. No. 11004974 9V387 description water nozzle D1 ø 24mm H 29mm int. ø 1 9mm






accessories					
gaskets					
10					
No.	528402	Ref. No.	DM0041/030		
description	O-ring Viton thickness 2.62mm ID ø 10.78mm Qty 1 pcs				


springs			
₁ M/W/			
No.	526687	Ref. No.	WGARB0882
description	compression spr steam-/water-tag		n wire gauge ø 1.6mm steel for

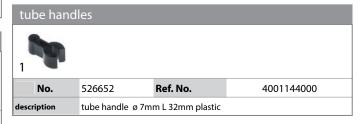









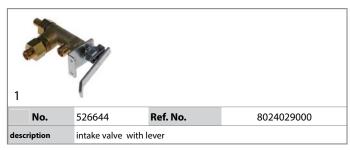

accessories					
bolts					
1					
No.	No. 526684 Ref. No. WGARB0844				
description	bolt ø 5mm L 20mm brass for lever				


springs			
₁ //////	W		
No.	526686	Ref. No.	WGA4001089000
description	compression	spring ø 12.5mm L 43.5	mm wire gauge ø 1.2mm







valves			
1			
No.	526683	Ref. No.	WGA8001072000
description	non-return valv	ve for filling valve L 16.	3mm brass


level glasses					
level glasses					
gaskets	gaskets				
1					
No.	526678	Ref. No.	WGA4001076000		
description	gasket D1 ø 16.5mm D2 ø 12mm H 11mm				


















description



non-return valves complete No. 526648 Ref. No. 5024001000 description non-return valve inlet 1/4" ET outlet 1/4" IT L 61mm

1	=0		
No.	526647	Ref. No.	WGADM2198
description	non-return valve inlet 3/8" ET outlet 1/4" IT L 61mm		

grinding burrs grinding burrs straight standard No. 527244 Ref. No. N/A grinding burrs pair turn direction right D1 ø 50mm ID ø 30mm H


ø 40 straight suitable for GAGGIA, BABY


7.5mm tooth spacing 2.5mm hole ø 4.5mm bore ø 7.5mm mounting


supports No. 531170 Ref. No. 9M877 description support for coffee beans container intake conical seat ø 63-62mm suitable for GAGGIA

knobs


steam/water taps No. 111065 Ref. No. N/A description knob ø 43mm shaft ø 8x8mm black accessories for 111065 No. 111066 Ref. No. — knob spring









knob di	ial plates		
No.	526656	Ref. No.	WGADM0794/003













gaskets




























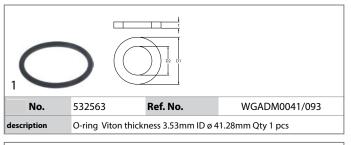






description



rubber gaskets No. 526631 Ref. No. WGA4001094000

PTFE gaskets 1 No. 526679 Ref. No. WGA4001077000 description flat gasket PTFE ED Ø 18mm ID Ø 13mm thickness 2mm Qty 1 pcs

flat gasket rubber ED ø 24mm ID ø 15mm thickness 3mm Qty 1 pcs

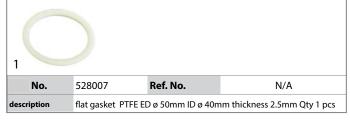

special gaskets

group gaskets





No.	528132	Ref. No.	N/A
description	group gasket L 68 GIA hole distance		ness 2.5mm suitable for GAG-

springs


compression springs







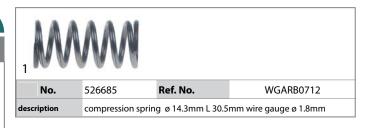



manometers





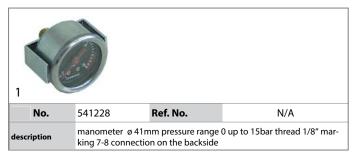





























1	72 B 3 7		
No.	541283	Ref. No.	3320026
description	manometer ø 52mm pressure range 0 up to 3bar connection on the backside marking 1-1.5 thread 1/4"		













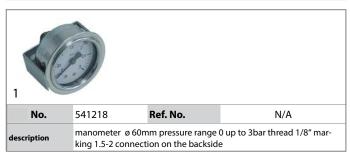












No.	541240	Ref. No.	N/A
description	manometer t 8 connection		ge 0 up to 16bar black marking

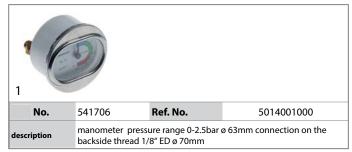












membrane dosing pumps self-priming SEKO spare parts No. 361304 Ref. No. WGADM0041/053 description O-ring EPDM ID Ø 11.11mm thickness 1.78mm Qty 1 pcs for type DIB3E/DIBSE





fittings, hose and pipe connectors

hose connectors without screw connection No. 526673 Ref. No. WGA5001021000 description hose connector plastic hose ø 15-15mm angled L 48mm W 48mm

fastening material



valves and tank inlets





No.520752Ref. No.12000892descriptionone ear clamp ø 7.8-9.5mm width 5mm strip thickness 0.6mm Qty 20 pcs SS W4

ancillary products

