
Professionale pentru echipamente profesionale



heating elements

quartz heating elements



heating elements for convection




thermostats

control and safety thermostats

PRODIGY / FIRT



thermostat temperature range 30-90°C 1-pole 1CO 16A probe ø 6.5mm probe L 67mm capillary pipe 1450mm capillary pipe isolated description 70mm shaft ø 6x4.6mm shaft L 16mm shaft position lower rotation



switches and momentary switches

rocker/momentary rocker switches

30x22mm

labelled



1				
No.	300125	Ref. No.	MC2	869600
lescription	rocker switch mounting measurements 30x22mm green 2NO 230V 16A 0-I connection male faston 6.3mm ambient temperature max. 125/55°C protection IP65 with cover cap			
ccessories for	300125			
	No.	301036	Ref. No.	_
	protective cover internal size 30x22mm for rocker switch mounting measurementsmm			

lamps

indicator lights

indicator lights (complete)

ø10mm

with plug-in socket



No.	359140	Ret. No.	MC2854000
description	indicator light ø 10 Qty 1 pcs	0mm yellow 230V c	onnection male faston 6.3mm





electronic controllers

EVCO - EVERY CONTROL

universal controllers

built-in version



1					
No.	378293	Ref. No.	MC2	869305	
description	electronic controller EVCO mounting measurements 71x29mm 230V voltage AC NTC relay outputs 1 -99 up to +150°C display 4 digits 16A default setting +50 up to +70°C type EVK401N7VHXXX01				
accessories for	378293				
	No.	378261	Ref. No.	_	
		be NTC 10kOhm c 40 up to +110°C p Innection 2-wire			
	No.	379057	Ref. No.	_	
-	temperature probe NTC 10kOhm cable PVC probe -20 up to +80°C cable -10 up to 100°C probe ø6x25mm cable length 3m 2-wire				
	No.	379160	Ref. No.	_	
	temperature probe NTC 10kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x14mm cable length 1.5m without screw connection 2-wire				
	No.	379161	Ref. No.	_	
	temperature probe NTC 10kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x14mm cable length 3m without screw connection 2-wire				
	No.	379342	Ref. No.	_	
	temperature probe NTC 10kOhm cable PVC probe -20 up to +80°C cable -10 up to 100°C probe ø6x25mm cable length 1.5m 2-wire protection IP67				
	No.	379343	Ref. No.	_	
	temperature probe NTC 10kOhm cable silicone probe -40 up to +110°C cable -50 up to +180°C probe ø6x40mm cable length 3m 2-wire				
	No.	379458	Ref. No.	_	
	temperature probe NTC 10kOhm cable silicone probe -40 up to +110°C cable -50 up to +180°C probe ø6x40mm cable length 1.5m without screw connection 2-wire				
	No.	379784	Ref. No.	_	
	temperature probe NTC 2kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x35mm cable length 2m without screw connection 2-wire resistor 2kOhm				
	No.	379860	Ref. No.	_	
		be NTC 10kOhm c 00°C probe ø6x40 n 2-wire			

miscellaneou

speed controllers




No.	402957	Ref. No.	195TL630
description	230VV 1200W max	. 10A load current (votage output 46-184V/115- 6A wall-mounted version length ize 74mm D 72mm for range

fans

hot air fans

miscellaneous





No.	601531	Ref. No.	195TL110
description	hot air fan 220V 30 fan wheel ø 155mr		L2 12mm L3 30mm L4 87mm 407



extractor fans

extractor fans



No.	601849	Ref. No.	195TL700	
description	radial fan 420W 230V 50/60Hz max. 3.6A 1320rpm capacitor total length 378mm H 387mm outlet height 263mm outlet w			
	295mm protection	IP55		

speed controllers



No.	402957	Ref. No.	195TL630
description	230VV 1200W max	. 10Å load current (votage output 46-184V/115- 5A wall-mounted version length ize 74mm D 72mm for range


electric accessories

terminals

porcelain clamps No. 555000 Ref. No. MC2850500 porcelain terminal block 3-pole 4mm² hole distance 12mm max. 30A max 450V L 34mm W 25mm H 18mm mounting distance 12mm Qty 1 pcs

miscellaneous

service kits

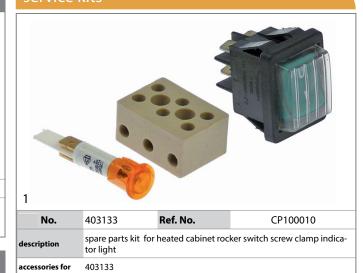

301036

No.

measurementsmm

Ref. No.

protective cover $\,$ internal size 30x22mm for rocker switch mounting

