

Professionall

Solutii profesionale pentru echipamente profesionale



GAS COMPONENTS



ELECTRIC COMPONENTS



WATER TECHNOLOGY



MECHANICAL COMPONENTS




TOOLS




Spare parts suitable for




KÖHLER ESBACK






heating elements

heating elements for heated trolleys

			
No.	418309	Ref. No.	3000349
description	heating element 1600W 230V L 465mm W 257mm connection male faston 6.3mm dry heating element bracket mounting tube ø 6.5mm heating circuits 1 hole distance 210mm hole ø 4.5mm mounting thread M4 lug length 30mm lug width 16mm		

			
No.	415340	Ref. No.	360060. 3000370
description	heating element 400W 230V L 477mm W 172mm connection M4 dry heating element L1 37mm L2 440mm W1 71mm W2 30mm rectangular flange tube ø 6.3mm heating circuits 1 hole distance 56mm flange length 70mm flange width 22mm hole ø M4mm		
accessories for	415340		
	No.	510368	Ref. No. —
	gasket L 70mm W 23.5mm hole ø 5mm hole distance 56mm FIBER thickness 2mm for heating element		
	No.	510426	Ref. No. —
	gasket L 72mm W 20mm hole distance 56mm silicone thickness 2mm for heating element		

			
No.	415339	Ref. No.	360080. 3000352
description	heating element 600W 230V L 480mm W 175mm connection M4 dry heating element L1 40mm L2 440mm W1 72mm W2 31mm rectangular flange tube ø 6.4mm heating circuits 1 hole distance 56mm flange length 70mm flange width 22mm hole ø M4mm connection length 35mm		
accessories for	415339		
	No.	510368	Ref. No. —
	gasket L 70mm W 23.5mm hole ø 5mm hole distance 56mm FIBER thickness 2mm for heating element		
	No.	510426	Ref. No. —
	gasket L 72mm W 20mm hole distance 56mm silicone thickness 2mm for heating element		

			
No.	415338	Ref. No.	360100
description	heating element 900W 230V L 480mm W 174mm connection M4 dry heating element L1 37mm L2 443mm W1 72mm W2 30mm rectangular flange tube ø 6.3mm heating circuits 1 hole distance 56mm flange length 70mm flange width 22mm connection length 33mm mounting thread M4		
accessories for	415338		
	No.	510368	Ref. No. —
	gasket L 70mm W 23.5mm hole ø 5mm hole distance 56mm FIBER thickness 2mm for heating element		
	No.	510426	Ref. No. —
	gasket L 72mm W 20mm hole distance 56mm silicone thickness 2mm for heating element		
	No.	560111	Ref. No. —
	plain washer ID ø 4.3mm ED ø 9mm thickness 0.8mm SS Qty 20 pcs DIN 125A for thread M4		
	No.	560131	Ref. No. —
	hexagonal nut thread M4 H 3.2mm WS 7 SS DIN/ISO DIN 934 / ISO 4032/8673 Qty 20 pcs		





thermostats

control and safety thermostats

EGO


control thermostats with operation switch

55.13_ series

			
No.	375406	Ref. No.	3000367
description	thermostat t.max. 110°C temperature range 30-110°C 1-pole 1CO 16A probe ø 6mm probe L 113mm capillary pipe 2380mm capillary pipe isolated 1700mm gland nut M9x1 shaft ø 6x4.6mm shaft L 18mm shaft position upper rotation 270° outer switch 2NO		
accessories for	375406		
	No.	110545	Ref. No. —
	knob dial plate silver thermostat t.max. 110°C 30-110°C rotation 310° ED ø 59mm ID ø 45.5mm		
	No.	112173	Ref. No. —
	knob universal ø 62mm black without adaptor/dial plate		
	No.	112311	Ref. No. —
	knob adapter shaft ø 6x4.6mm L 0mm with spring		



E-G-O



No.	390179	Ref. No.	3000368, 392080
description	thermostat t.max. 110°C temperature range 30-110°C 1-pole 1NO 16A probe ø 6mm probe L 113mm capillary pipe 1430mm capillary pipe isolatedmm gland nut shaft ø 6x4.6mm shaft L 23mm shaft position upper rotation 270° outer switch 2NO		

lamps



indicator lights

indicator lights (complete)

ø13mm

with screw socket



No.	359145	Ref. No.	3000250 404020
description	indicator light ø 13mm 230V green t.max. 120°C		
accessories for	359145		
	No.	510302	Ref. No. —
	O-ring EPDM ID ø 12.42mm thickness 1.78mm Qty 1 pcs		
	No.	511505	Ref. No. —
	O-ring EPDM thickness 1.78mm ID ø 12.42mm Qty 10 pcs		

LED

indicator lamps

mounting diameter 14mm




No.	359382	Ref. No.	3000250/1
description	indicator light LED mounting ø 14mm 230VAC green connection F2.8x0.8 mounting thread M14		

fans

hot air fans

ebm-papst



No.	601272	Ref. No.	3000070/1
description	hot air fan 220-230V 47W L1 65mm L2 17mm L3 28mm L4 157mm fan wheel ø 150mm ebm-papst type R2K150-AA21-13		

electric accessories

cables


spiral cables




No.	550101	Ref. No.	402020. 3000336
description	spiral cable plug type CEE7/7 type E+F 1.5mm ² 3-pole with plug L 500mm expansion 5:1 countries A/B/D/F/I orange t.max. 70°C		

knobs

universal knobs




No.	110119	Ref. No.	395080. 3000565
description	knob thermostat t.max. 110°C ø 50mm shaft ø 6x4.6mm shaft flat upper black temperature range 30-110°C rotation 270°		
accessories for	110119		
	No.	110135	Ref. No. —
	rosette knob up to ø 52mm		

producer-specific knobs

KÖHLER ESBACK



1

No.	110119	Ref. No.	395080. 3000565
description	knob thermostat t.max. 110°C ø 50mm shaft ø 6x4.6mm shaft flat upper black temperature range 30-110°C rotation 270°		
accessories for	110119		
	No.	110135	Ref. No.
			—
	 rosette knob up to ø 52mm		

handles and hand wheels

bracket handles



1

No.	690918	Ref. No.	3000607
description	pull handle L 177mm H 55mm mounting distance 140mm		

STEINCO

with spigot

stainless steel



1

No.	700273	Ref. No.	00002140
description	swivel castor ø 125mm spigot housing stainless steel capacity 100kg spigot height 62mm spigot-ø 18mm bearing ball bearing wheel body polyamide tread TPE tyres H 161mm wheel width 32mm Qty 1 pcs		



1

No.	700274 ¹	Ref. No.	00002142
description	swivel castor with swivel brake ø 125mm spigot housing SS capacity 100kg spigot height 62mm spigot-ø 18mm bearing ball bearing wheel body polyamide tread thermoplastic H 161mm wheel width 32mm Qty 1 pcs		

¹with swivel brake

TENTE

with fixing plate

chrome-plated steel



1

No.	700242	Ref. No.	3000597, 00000802
description	fixed castor ø 160mm plate fixing housing chrome-plated sheet steel plate size 137x105mm hole distance 105x77mm capacity 300kg bearing ball bearing wheel body polypropylene tread TPE tyres H 200mm wheel width 46mm -20 up to +80°C Qty 1 pcs		



1

No.	700243	Ref. No.	3000594, 00029827
description	swivel castor ø 160mm plate fixing housing chrome-plated sheet steel plate size 137x105mm hole distance 105x77mm capacity 300kg bearing ball bearing wheel body polypropylene tread TPE tyres H 200mm wheel width 46mm -20 up to +80°C Qty 1 pcs		



1

No.	700244 ¹	Ref. No.	3000596, 00029825
description	swivel castor with swivel brake ø 160mm plate fixing housing chrome-plated sheet steel plate size 137x105mm hole distance 105x77mm capacity 300kg bearing ball bearing wheel body polypropylene tread TPE tyres H 200mm wheel width 46mm -20 up to +80°C Qty 1 pcs		


¹with swivel brake




1

No.	700258 ¹	Ref. No.	00005972
description	swivel castor ø 200mm plate fixing housing zinc-plated sheet steel plate size 137x105mm hole distance 105x75mm capacity 400kg bearing ball bearing wheel body polyamide tread TPE tyres H 240mm wheel width 46mm -20 up to +80°C Qty 1 pcs		


¹hole distance 105x75 - 105x80

			
1			
No.	700259 ^{1,2}	Ref. No.	00005514
description	swivel castor with swivel brake ø 200mm plate fixing housing chrome-plated sheet steel plate size 137x105mm hole distance 105x75mm capacity 400kg bearing ball bearing wheel body polyamide tread TPE tyres H 240mm wheel width 46mm -20 up to +80°C Qty 1 pcs		


¹hole distance 105x75 - 105x80 ²with swivel brake

			
1			
No.	700247 ¹	Ref. No.	3000599, 00029522
description	fixed castor ø 160mm plate fixing housing stainless steel plate size 137x105mm hole distance 105x75mm capacity 300kg bearing precision ball bearing, sealed wheel body polyamide tread TPE tyres H 200mm wheel width 46mm -20 up to +80°C Qty 1 pcs		


¹hole distance 105x75 - 105x80

stainless steel			
			
1			
No.	700266 ¹	Ref. No.	00004982
description	fixed castor ø 125mm plate fixing housing stainless steel plate size 77x67mm hole distance 61.5x51.5mm capacity 100kg bearing slide bearing wheel body polypropylene tread TPE tyres H 160mm wheel width 32mm -20 up to +60°C Qty 1 pcs		


¹hole distance 56x46.5 - 61.5x51

			
1			
No.	700249 ^{1,2}	Ref. No.	3000600, 00029497
description	swivel castor with swivel brake ø 160mm plate fixing housing stainless steel plate size 140x110mm hole distance 105x75mm capacity 300kg bearing precision ball bearing, sealed wheel body polyamide tread TPE tyres H 200mm wheel width 46mm		


¹with swivel brake ²hole distance 105x75 - 105x80

			
1			
No.	700264 ¹	Ref. No.	00004971
description	swivel castor ø 125mm plate fixing housing stainless steel plate size 77x67mm hole distance 61.5x51.5mm capacity 100kg bearing slide bearing wheel body polypropylene tread TPE tyres H 160mm wheel width 32mm -20 up to +60°C Qty 1 pcs		


¹hole distance 56x46.5 - 61.5x51

			
1			
No.	700248 ¹	Ref. No.	3000598
description	swivel castor without brake ø 160mm plate fixing housing stainless steel plate size 140x110mm hole distance 105x75mm capacity 300kg bearing precision ball bearing, sealed wheel body polyamide tread TPE tyres H 200mm wheel width 46mm -20 up to +80°C Qty 1 pcs		


¹hole distance 105x75 - 105x80

			
1			
No.	700265 ^{1,2}	Ref. No.	00004977
description	swivel castor ø 125mm plate fixing housing stainless steel plate size 77x67mm hole distance 61.5x51.5mm capacity 100kg bearing slide bearing wheel body polypropylene tread TPE tyres H 160mm wheel width 32mm -20 up to +60°C Qty 1 pcs		


¹with swivel brake ²hole distance 56x46.5 - 61.5x51

			
1			
No.	700261 ¹	Ref. No.	00029552
description	swivel castor ø 200mm plate fixing housing stainless steel plate size 140x110mm hole distance 105x75mm capacity 400kg bearing precision ball bearing, sealed wheel body polyamide tread TPE tyres H 240mm wheel width 46mm -20 up to +80°C Qty 1 pcs		


¹hole distance 105x75 - 105x80

			
1			
No.	700263 ¹	Ref. No.	00029551
description	swivel castor ø 200mm plate fixing housing stainless steel plate size 140x110mm hole distance 105x75mm capacity 400kg bearing precision ball bearing, sealed wheel body polyamide tread TPE tyres H 240mm wheel width 46mm -20 up to +80°C Qty 1 pcs		

¹hole distance 105x75 - 105x80


1 			
No.	700262 ^{1,2}	Ref. No.	00029738
description	swivel castor with swivel brake ø 200mm plate fixing housing stainless steel plate size 140x110mm hole distance 105x75mm capacity 400kg bearing precision ball bearing, sealed wheel body polyamide tread TPE tyres H 240mm wheel width 46mm -20 up to +80°C		


¹hole distance 105x75 - 105x80 ²with swivel brake

with spigot			
stainless steel			
1 			
No.	700245	Ref. No.	3000586
description	swivel castor ø 125mm spigot housing stainless steel capacity 100kg spigot height 62mm spigot-ø 10mm bearing slide bearing wheel body polypropylene tread TPE tyres H 160mm wheel width 32mm -20 up to +60°C Qty 1 pcs		

1 			
No.	700246 ¹	Ref. No.	3000589
description	swivel castor with swivel brake ø 125mm spigot housing stainless steel capacity 100kg spigot height 62mm spigot-ø 10mm bearing slide bearing wheel body polypropylene tread TPE tyres H 160mm wheel width 32mm -20 up to +60°C Qty 1 pcs		


¹with swivel brake

plastic			
1 			
No.	700302	Ref. No.	00000696
description	swivel castor ø 125mm spigot housing plastic capacity 100kg spigot height 62mm spigot-ø 18mm bearing ball bearing wheel body polypropylene tread TPE tyres H 162mm wheel width 32mm -20 up to +60°C Qty 1 pcs		

1 			
No.	700303 ¹	Ref. No.	00000697
description	swivel castor with swivel brake ø 125mm spigot housing plastic capacity 100kg spigot height 62mm spigot-ø 18mm bearing ball bearing wheel body polypropylene tread TPE tyres H 162mm wheel width 32mm -20 up to +60°C Qty 1 pcs		

¹with swivel brake

bumper angles

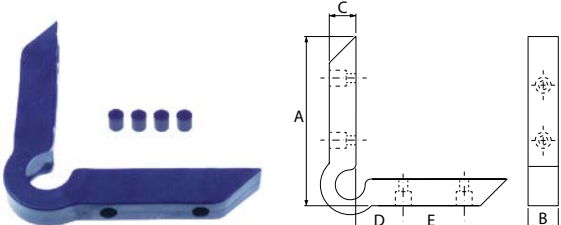
1 			
No.	690154	Ref. No.	3000555, 292060
description	bumper angle outer length 158mm inner length 130mm W 25mm H 23mm mounting distance 56mm hole distance 35mm hole ø 6mm plastic blue		

hose reels and spray guns

cleaning guns

spare parts and accessories


hose connectors

1 			
No.	540474	Ref. No.	3000506
description	hose connector nickel-plated brass straight thread 1/2" hose ø 19mm Qty 1 pcs		

fittings, hose and pipe connectors

hose connectors

brass

1 			
No.	540474	Ref. No.	3000506
description	hose connector nickel-plated brass straight thread 1/2" hose ø 19mm Qty 1 pcs		



valves and tank inlets


ball valves

universal

mini ball valves



1

No.	520296	Ref. No.	3000500
description	ball valve connection 1/2" IT - 1/2" IT DN10 total length 47mm chrome-plated brass		
accessories for	520296		
	No.	515040	Ref. No. —
drain fitting size 1/2" usable heightmm overall height 16mm ED ø 28mm chrome-plated brass			