

Professionale pentru echipamente profesionale




heating elements


immersion heating elements





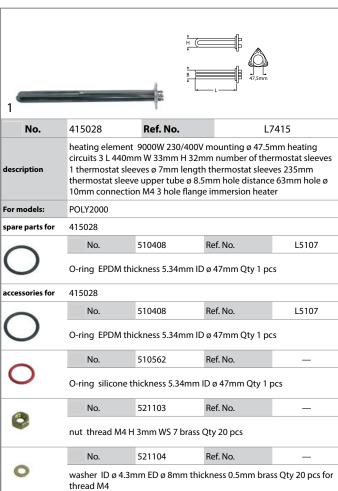


accessories for	415028					
	No.	560111	Ref. No.	_		
0	plain washer ID ø 4.3mm ED ø 9mm thickness 0.8mm SS Qty 20 pcs DIN 125A for thread M4					
	No.	560131	Ref. No.	_		
	hexagonal nut thread M4 H 3.2mm WS 7 SS DIN/ISO DIN 934 / ISO 4032/8673 Qty 20 pcs					

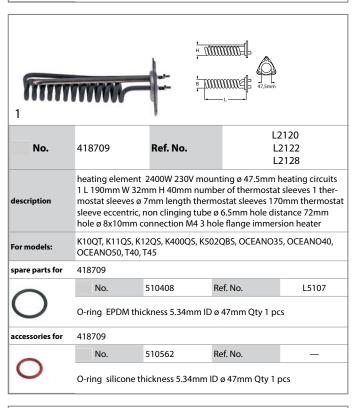







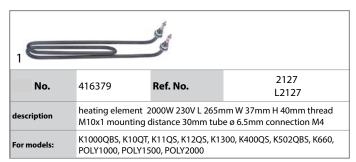

foil heating elements



accessories

T40, T45, T50

For models:



thermostats

bi-metal thermostats

safety bi-metal thermostats



•						
No.	390233	Ref. No.			2062 7292	
description	,	bi-metal safety thermostat hole distance 24mm switch-off temp. 110°C 1NC 1-pole 16A connection F6.3 2 hole fixing without holder				
For models:	K660, OCEANO POLY2000	K660, OCEANO35, OCEANO40, OCEANO50, OCEANO60, POLY1500, POLY2000				
accessories for	390233					
0	No.	504736	Ref	. No.	_	
5	bracket for contact thermostat					
0	No. 550388 Ref. No. —					
0	bracket for cor	bracket for contact thermostat mounting distance 24.5mm moun-				

bi-metal thermostats



No.	390301	Ref. No.	L2061 L2083	
description	bi-metal thermostat hole distance 23.8mm switch-off temp. 60°C 1NC 1-pole 16A connection F6.3 2 hole fixing			
For models:	K10QT, K12QS, OCEANO35, OCEANO40, OCEANO50, OCEANO60			

control and safety thermostats


IMIT / TEMPOMATIC / ARTHERMO

control thermostats



	No.	376053	Ref. No.	L2060			
de	escription	thermostat t.max. 87°C temperature range 0-87°C 1-pole 1CO 16A probe ø 6.5mm probe L 97mm capillary pipe 1500mm capillary pipe isolated 1400mm gland nut shaft ømm shaft Lmm shaft position					
Fo	or models:	K1000QBS, K10QT, K11QS, K12QS, K1300, K400QS, K502QBS, K660, OCEANO35, OCEANO40, OCEANO50, OCEANO60, POLY1000, POLY1500, POLY2000, T40, T45, T50					





refrigeration thermostats

RANCO




No.	390289	Ref. No.	FA1073 L4750 M06711020
description	thermostat RANCO	O type K61L1502 pr	obe ømm probe Lmm capillary

switches and momentary switches

push/momentary push switches

19x13mm

No.	301105	Ref. No.	L7066			
description	momentary push switch mounting measurements 19.3x12.9mm black 1NO 250V 16A connection male faston 6.3mm ambient temperature max. 150 85°C protection IP40					
For models:	POLY2000, T40, T	45. T50				

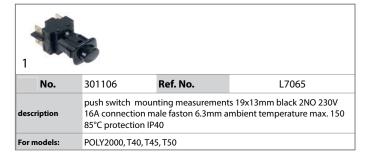

28.5x28.5mm Ref. No. No. 345565 L7440 push switch mounting measurements 28.5x28.5mm green 2NO 250V description 16A connection male faston 6.3mm ambient temperature max. 150°C protection IP40 For models: POLY1500

28.5x52.6mm



No.	346076	Ref. No.	L7210			
description	switch combination mounting measurements 28.5x52.6mm black/ grey 2NO/1NO 250V 16A ON-OFF, timer connection male faston 6.3mm ambient temperature max. 85°C protection IP40					
For models:	OCEANO35, OCEANO40, OCEANO50, OCEANO60, POLY1000, POLY1500					

28.5x77.5mm



No.	346551	Ref. No.	L2037		
description	switch combination latching/momentary/latching mounting measurements 28.5x77.5mm green/grey/black 2NO/1NO/2NO 250V 16A time/main switch connection male faston 6.3mm ambient temperature max. 85°C protection IP40				
For models:	K1300				



No.	346996	Ref. No.	L2034	
description	switch combination momentary mounting measurements 28.5x77.5mm blue/grey/black 2NO/1NO/1NO 250V 16A with indic tor main switch/time/rinsing connection male faston 6.3mm ambitemperature max. 55/120°C protection IP40			
For models:	K1000QBS, K10QT, K11QS, K12QS, K400QS, K502QBS, K660			





microswitches lever actuated No. 345742 Ref. No. L7071 microswitch with lever 250V 16A 1CO connection male faston 6.3mm description L 55mm ambient temperature max. 120°C mounting distance 22mm actuating force: 75g lever length 46mm

For models: T40, T45, T50 pin-plunger actuated miscellaneous 2131 346997 Ref. No. No. L2131 microswitch 250V 6A 1NO connection male faston 6.3mm ambient description temperature max. 125°C K1000QBS, K10QT, K11QS, K12QS, K400QS, K502QBS, OCEANO35,


position switches

For models:



OCEANO40, OCEANO50, OCEANO60

stem switches (ROLD)

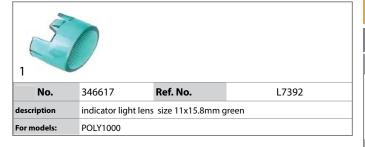


rotary switches

LOVATO No. Ref. No. L2028 346555 rotary switch 3 1-2-3 sets of contacts 3 type GN128940U 690V 12A description shaft ø 6x6mm shaft L 23.5mm shaft square connection screw For models: K1300, POLY1500, POLY2000



magnetic switches

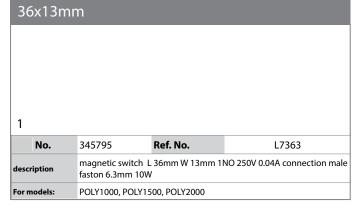

lamps

indicator lights


indicator lights 2-piece (lens and indicator lamp)

indicator lamps for socket type SA / SC / SD / SF / SR



No.	359982	Ref. No.	L7063	
description	indicator lamp 230V clear connection male faston 6.3mm Qty 1 pcs			
For models:	T40, T45, T50			





indicator lights (complete)

ø10mm

with plug-in socket



1					
No.	359139	Ref. No.	L2041		
description	indicator light ø 10mm green 230V connection male faston 6.3mm Qty 1 pcs				
For models:	K1000QBS, K10QT, K11QS, K12QS, K1300, K400QS, K502QBS, K660				

1				
No.	359138	Ref. No.	L2040	
description	indicator light ø 10mm red 230V connection male faston 6.3mm Qty 1 pcs			
For models:	K1000OBS_K10OT	K1105 K1205 K13	300 K400OS K502OBS K660	

1 No. 359201 Ref. No. L7393 description indicator light mounting measurements 19x13mm 230V green connection male faston 6.3mm temp.-resist. 150°C For models: POLY2000

1			
No.	359200	Ref. No.	L7397
description indicator light mounting measurements 19x13mm 230V red contion male faston 6.3mm			nts 19x13mm 230V red connec-
For models:	POLY2000		

28.5x52.6mm				
1				
No.	359111	Ref. No.	L7211	
description	indicator light mored	ounting measureme	nts 28.5x52.6mm 230V green/	
For models:	OCEANO35, OCEA POLY1500	NO40, OCEANO50,	OCEANO60, POLY1000,	

timers

programme timers



No.	360400	Ref. No.	L2010
			operation time 120s 230V f. no. D94 / LU003 motor type



No.	360118	Ref. No.	_
	on ø 4.9mm teeth otor ø 47mm H 19		


timer cable length 260mm 1.9/2.5W



•				
No.	360524 Ref. No. 4695 L4695 M06712020			
description	timer CDC 11904 engines 1 chambers 4 operation time 12min 230V shaft ømm shaft Lmm manuf. no. 11904F1 / BDR000.0000 motor type M48R ATS			
spare parts for	360524			
	No.	360118	Ref. No.	_
13	motor CDC pinion ø 4.9mm teeth 10 230V voltage AC 50/60Hz turn direction right motor ø 47mm H 19.3mm motor type M48R ATS for timer cable length 260mm 1 9/2 5W			







contactors

LOVATO

power contactors



No.	380705	Ref. No.		L2113		
description	power contactor resistive load 20A 230VAC (AC3/400V) 9A/4kW main contacts 3NO auxiliary contacts 1NO connection screw connection type 11BG0910A230					
For models:		K1000QBS, K1300, K660, OCEANO60, POLY1000, POLY1500, POLY2000, T50				
accessories for	380705	380705				
ASA.	No.	No. 380057 Ref. No. —				
	auxiliary contact contacts 1NO/1NC AC1 10A for contactors BG series connection screw type BGX1011					



No.	380855 Ref. No. L2111			
description	power contactor resistive load 25A 230VAC (AC3/400V) 4.2kW main contacts 3NO auxiliary contacts 1NO			
For models:	K1300, POLY1500, POLY2000			
accessories for	380855			
	No.	380055	Ref. No.	_
1	RC circuit voltage AC/DC suitable for BF09-32 rated 240V			
	No.	380118	Ref. No.	_
	auxiliary contact contacts 1NO/1NC AC1 10A for contactors BF series connection screw type G480/11			



relays

power relays

with bracket mounting



No.	380054	Ref. No.	L2082 L7391
description	power relays 230VAC 16A 2CO connection male faston 6.3mm bracket mounting		
For models:	K1300, POLY1000,	POLY1500, POLY20	00

solenoid valves

solenoid valves (water

RPE

solenoid valves with reducer

sinale




No.	370440	Ref. No.	N10368
escription		•	rane (constantly open) angled /min RPE plastic flow regulating



TP				
The control of the first	trostamentes			
No.	370021	Ref. No.	L2	2020
description		louble straight 23 gulating valve inle	0VAC inlet 3/4" out et white	let 11.5mm
For models:	K1000QBS, K10C	T, K11QS, K12QS,	K400QS, K502QBS	
spare parts for	370021			
-5	No.	371013	Ref. No.	_
	solenoid coil TP	230VAC 50/60Hz		
accessories for	370021			
	No.	371220	Ref. No.	_
	reducer TP flow	rate 3I/min red to		
	No.	371221	Ref. No.	_
	reducer TP flow	rate 5.5l/min yello	ow tolerance ±15%	
	No.	371222	Ref. No.	_
	reducer TP flow	rate 6l/min grey t	olerance ±15%	
	No.	371223	Ref. No.	_
	reducer TP flow	rate 10l/min white	e tolerance ±15%	
ATA	No.	371224	Ref. No.	_
	reducer TP flow	rate 12l/min bron	ze tolerance ±15%	
AVA	No.	371225	Ref. No.	_
414	reducer TP flow	rate 16l/min light	brown tolerance ±	15%
-	No.	371226	Ref. No.	_
	reducer TP flow	rate 20l/min red t	olerance ±15%	
A	No.	371230	Ref. No.	_
	reducer TP flow	rate 0.25l/min red	l tolerance ±25%	
<u> </u>	No.	371231	Ref. No.	_
	reducer TP flow	rate 0.35l/min vio	let tolerance ±25%)
*	No.	371232	Ref. No.	_
	reducer TP flow	rate 0.5l/min oran	ige tolerance ±25%	, 5
-	No.	371233	Ref. No.	
	reducer TP flow	rate 0.8l/min whit	e tolerance ±25%	
-	No.	371234	Ref. No.	_
	reducer TP flow	rate 1l/min light b	olue tolerance ±259	%
	No.	371235	Ref. No.	
	reducer TP flow	rate 1.2l/min brov	vn tolerance ±25%	
	No.	371236	Ref. No.	
	reducer TP flow	rate 1.5l/min light	t brown tolerance ±	±25%

accessories for	370021				
	No.	371237	Ref. No.	_	
	reducer TP flow	w rate 2.5l/min ye	llow tolerance ±25%		
*	No.	371238	Ref. No.	_	
	reducer TP flov	w rate 3.4l/min da	ark green tolerance ±	25%	
	No.	371239	Ref. No.	_	
reducer TP flow rate 5I/min black tolerance ±25%					
	No.	371240	Ref. No.	_	
reducer TP flow rate 8l/min blue tolerance ±20%					
			·		

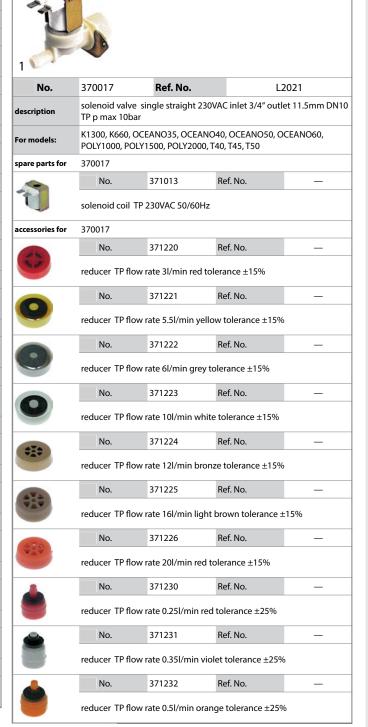





accessories for	370017				
4	No.	371233	Ref. No.	_	
	reducer TP flow	rate 0.8l/min whit	e tolerance ±25%		
	No.	371234	Ref. No.	_	
	reducer TP flow	rate 1l/min light b	olue tolerance ±25	%	
-	No.	371235	Ref. No.	_	
	reducer TP flow	rate 1.2l/min brov	vn tolerance ±25%		
-	No.	371236	Ref. No.	_	
	reducer TP flow rate 1.5l/min light brown tolerance ±25%				
	No.	371237	Ref. No.	_	
	reducer TP flow rate 2.5l/min yellow tolerance ±25%				
-	No.	371238	Ref. No.	_	
	reducer TP flow rate 3.4l/min dark green tolerance ±25%				
	No.	371239	Ref. No.	_	
	reducer TP flow rate 5I/min black tolerance ±25%				
	No.	371240	Ref. No.	_	
	reducer TP flow	rate 8l/min blue to	olerance ±20%		

solenoid valves with reducers				
1				
No.	370427	Ref. No.	L4690	
description		.2l/min DN10 t.max. 90°0	inlet 3/4" outlet 11.5mm inputl/ CTP plastic flow regulating valve	

pressure switches

for warewashing


ø 58mm with male faston 6.3mm


with connection horizonta




No.	541539	Ref. No.	L7375 L7433
description	pressure control pressure range 160/50mbar connection male faston 6.3mm ø 58mm pressure connection horizontal warewashing pressure connection ø 5mm		
For models:	POLY1000, POLY1500, POLY2000		



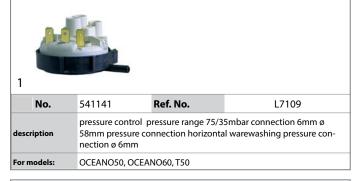

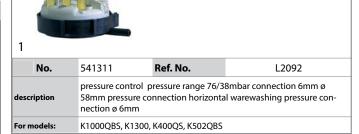

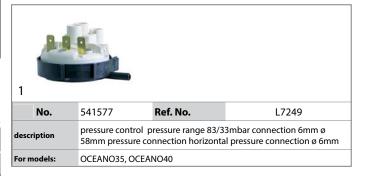



pumps

wash and rinse pumps

ALBA (C&A)



1		6	6	
No.	500296	Ref. No.	L1	301
description	pump inlet ø 28mm outlet ø 28mm type C903 230V 50Hz 1 phase 0.11kW 0.15HP L 200mm rotation direction left capacitor 6.3μF auxiliary pressure connection 13mm supporting pressure closed ALBA PUMPS (C&A)			
For models:	K10QT			
spare parts for	500296			
	No.	365012	Ref. No.	_
	operating capacitor capacity 6.3μ F 450V tolerance 5% 50Hz ambient temperature max25 to +85°C ø 30mm L 61mm M8 plastic connection male faston 6.3 mm protection			
	No.	510692	Ref. No.	_
90	mechanical shaft seal for shaft ø 11mm slide ringext. Ø 24mm slide ring H 13mm counter ring mounting Ø 26mm height counter ring 8mm counter ring int. Ø 14mm			
-4	No.	521226	Ref. No.	_
	impellor ø 72mm H 19mm thread M7R shaft ø 11mm shaft length 29mm blades 3			
	No.	521521	Ref. No.	_
	auxiliary pressure	connection 13m	nlet ø 28mm outlet m supporting pres nner hight 31mm	

532490

O-ring EPDM thickness 2.62mm ID ø 72.69mm Qty 1 pcs

Ref. No.



1				
No.	499191	Ref. No.	L'	7180 7181 7450 7483
description			n type CL.1301 23 direction left capa	
For models:	OCEANO35, OCE	ANO40		
spare parts for	499191			
	No.	365012	Ref. No.	_
	operating capacitor capacity 6.3µF 450V tolerance 5% 50Hz ambient temperature max25 to +85°C ø 30mm L 61mm M8 plastic connection male faston 6.3mm protection			
	No.	510692	Ref. No.	_
90	mechanical shaft seal for shaft ø 11mm slide ringext. ø 24mm slide ring H 13mm counter ring mounting ø 26mm height counter ring 8mm counter ring int. ø 14mm			
-4	No.	521226	Ref. No.	_
	impellor ø 72mm H 19mm thread M7R shaft ø 11mm shaft length 29mm blades 3			
	No.	521521	Ref. No.	_
	pump cover ALBA PUMPS (C&A) inlet ø 28mm outlet ø 28mm auxiliary pressure connection 13mm supporting pressure closed turn direction left ø 93mm ID ø 76mm inner hight 31mm			
	No.	532490	Ref. No.	_
	O-ring EPDM thi	ckness 2.62mm ID	ø 72.69mm Qty 1	pcs





1						
No.	500945	500945 Ref. No. L1321				
description			n 230V 1 phase 0.3 pacitor 10µF ALBA			
For models:	K12QS					
spare parts for	500945					
	No.	365015	Ref. No.	_		
4		25 to +85°C ø 3∶	400V tolerance 59 5.5mm L 59mm M			
	No.	509018	Ref. No.	_		
\bigcirc	O-ring EPDM thickness 3.53mm ID ø 107.5mm Qty 1 pcs					
	No.	509028	Ref. No.	_		
	impellor ø 87mm H 21mm rotation direction right thread M7L shaft ø 12mm					
	No.	510693	Ref. No.	_		
90	mechanical shaft seal for shaft ø 12mm slide ringext. Ø 24mm slide ring H 15.5mm slide ring int. Ø 11mm counter ring mounting Ø 24mm height counter ring 8mm counter ring int. Ø 13.5mm					
	No.	521528	Ref. No.	_		
Marine		, ,	let ø 45mm outlet nm inner hight 19r			



spare parts for	500085			
	No.	509021	Ref. No.	_
6	impellor ø 102m right	ım H 32mm shaft i	intake ø 9/8mm ro	tation direction
	No.	510693	Ref. No.	_
90	ring H 15.5mm sl	ide ring int. ø 11m	2mm slide ringext nm counter ring m ring int. ø 13.5mm	ounting ø 24mm
400	No.	521531	Ref. No.	_
			nlet ø 45mm outle nm inner hight 24	
	No.	521709	Ref. No.	_
	O-ring EPDM thi	ckness 3mm ID ø	126mm Qty 1 pcs	















1					
No.	500946	Ref. No.	_	1303 7501	
description			n type ZF150SX 23 rection right capa		
For models:	K11QS, K400QS				
spare parts for	500946				
	No.	365015	Ref. No.	_	
C	operating capacitor capacity $10\mu F$ 400V tolerance $5\%Hz$ ambient temperature max25 to +85°C ø 35.5mm L 59mm M8 plastic connection male faston 6.3mm protection				
	No.	510703	Ref. No.	_	
	mechanical shaft seal for shaft ø 13mm slide ring H 13mm height counter ring 5.5mm ED ø 26mm				
	No.	521140	Ref. No.	_	
	pump cover LGB inlet ø 45mm outlet ø 40mm auxiliary pressure connection 12mm pump type ZF150SX			ary pressure	
_	No.	521701	Ref. No.	_	
\bigcirc	pump cover gask	et			



description	pump inlet ø 62mm outlet ø 50mm type ZF522VSX 230V 50Hz 1 phase 0.7kW 0.95HP L 250mm rotation direction right capacitor 16µF LGB			
spare parts for	500943			
	No.	365021	Ref. No.	_
0			425V tolerance 59	

connection male faston 6.3mm 416.10.99 protection

spare parts for	500943			
	No.	510551	Ref. No.	_
\bigcirc			mm pump type 12 ss 3.53mm EPDM (214/1293/1225/2243, Qty 1 pcs
	No.	510694	Ref. No.	_
90			t ø 13mm height o ø 24/26mm int. ø 1	ounter ring 8mm ID 1 14mm
	No.	521239	Ref. No.	_
6			otation direction ri seat ø 8.2mm blad	ght thread M8L shafi les 6
8	No.	521536	Ref. No.	_
	pressure con			0mm auxiliary closed turn directior

condensators & interference suppression filters


filters



equipment-specific units

for ice-cube maker


ice chutes slide grates









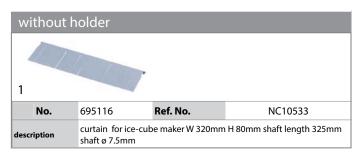


for coffee grinders



for dishwashers drain and intake components LUXIA drain /intake bodies No. 507478 Ref. No. L3042 description drain fitting thread 1" ED ø 50mm ID ø 25/21mm hose ø 26mm For models: K10QT, K11QS, K12QS, OCEANO50, OCEANO60
















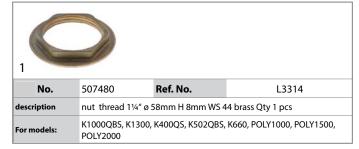

















1			
No.	507483	Ref. No.	L7105 L7299
description	overflow pipe L 23	30mm ø 25mm stai	nless steel
For models:	T40, T45		






air traps No. 511447 Ref. No. L3072 description air trap with gasket L 84mm W 34mm H 50mm thread 3/4" hose ø 6mm For models: K1000QBS, K10QT, K11QS, K12QS, K1300, K400QS, K502QBS, K660



door mechanics locks No. 507011 Ref. No. L3110 description door catch complete door locking catch For models: K1000QBS, K10QT, K11QS, K12QS, K400QS, K502QBS, OCEANO35, OCEANO40, OCEANO50, OCEANO60











washing and rinsing systems (sorted by producer)

LUXIA



No.	507431	Ref. No.	L5041	
description	wash arm L 215mm nozzles 6 number B			
For models:	K1000QBS, K1300,	K660		



1			
No.	507426	Ref. No.	L3378 L5032
description	wash arm boss		
For models:	K1300		













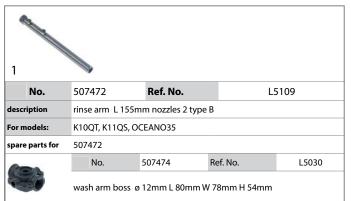







miscellaneous						
1	1					
No.	507432	Ref. No.	L2161			
description	description end cap for rinse arm ø 10mm					


1			
No.	507433	Ref. No.	L2160
description	end cap for wash	arm ø 15.5mm	

1			
No.	502051	Ref. No.	3325 L3325 L3325+2xL3410 L3325+L3410
description	rinse jet		





1				
No.	507475	Ref. No.	L3319 L3319+L3410	
description	wash jet comp	olete		

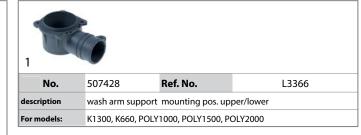

rinse arm shafts						
1	1=====					
No.	507441	Ref. No.	L3356			
description	rinse arm sha	ft				


knobs

LUXIA

producer-specific knobs











baskets

warewashing baskets

steel wire baskets round

nix baskets



No.	970520	Ref. No.	L3503			
description	mix backet ED a 4	55mm H 160mm ca	ast @ 300mm			

plastic baskets round



No.	970826	Ref. No.	L3502
description	mix basket ED ø 4	10mm H 190mm	

plastic baskets square

mix baskets



1						
No.	971058	Ref. No.	L3510 L7185			
description	scription mix basket L 350mm W 350mm H 150mm					
For models:	K10QT, K11QS, OCEANO35					


gaskets

O-rings

EPDM



No.	504561	Ref. No.	L7104		
description	O-ring EPDM thickness 2.62mm ID ø 29.82mm Qty 1 pcs				
For models:	OCEANO35, OCEANO40, OCEANO50, OCEANO60, PO POLY1500, POLY2000, T40, T45, T50				

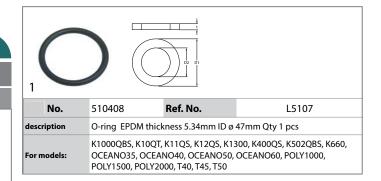



sealing washers


rubber gaskets



No.	510154	Ref. No.	L7045 L7100		
description	flat gasket rubber ED ø 33mm ID ø 26mm thickness 2mm Qty 1 pcs				
For models:	OCEANO35, OCEANO40, OCEANO50, OCEANO60, POLY1000, POLY1500, POLY2000, T40, T45, T50				

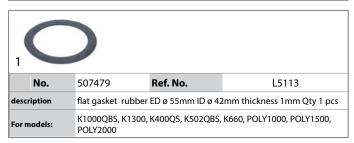



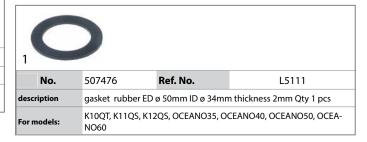



0

refrigeration cycle components

valves

Schrader valves

valve bodies



IVO.	/3009/	rei. No.	1114007
description	valve body for Sch		1/4" SAE connection 6mm

dosing pumps

peristaltic dosing pumps

GERMAC

built-in version

with frequency control



1					
No.	361620	Ref. No.	L	L1308 L7002 L7215	
description	J 1		control 2.5I/h 230 type G252 dimen		
For models:	K1300, OCEANO3 POLY1500, POLY2		CEANO50, OCEAN	O60, POLY1000,	
spare parts for	361620				
200	No.	361263	Ref. No.	_	
T	roller assembly GERMAC suitable for G80/82/150/152/200/202/250 /252/600				
	No.	361554	Ref. No.	_	
*	pump hose GERMAC detergent hose type thermoplastic hose ø 5x8mm for model G200/G250/G252				
***	No.	361556	Ref. No.	_	
Care	control PCB type G82/G152/G202/G252 GERMAC				
accessories for	361620				
	No.	520090	Ref. No.	_	
	PVC hose ID ø 4mm ED ø 6mm L 2m thickness 1mm t.max. 60°C transparent				
	No.	520091	Ref. No.	_	
	nylon hose ID ø 4mm ED ø 6mm L 2m thickness 1mm operating p. 10bar burst p. 50bar t.max. 100°C transparent				

membrane dosing pumps

self-priming

various



No.	361015	Ref. No.	L.	1504 7012 7013 7219 7374
description	dosing pump membrane dosing pump rinse aid inlet 6x8mm outlet 4x6mm pressure connection ø 4x6mm suction connection ø 6x8mm			
For models:	K1000QBS, K10QT, K11QS, K12QS, K1300, K400QS, K502QBS, K660, OCEANO35, OCEANO40, OCEANO50, OCEANO60, POLY1000, POLY1500, POLY2000, T40, T45, T50			
spare parts for	361015			
	No.	361132	Ref. No.	_
4	membrane dosing pump			
	No.	510298	Ref. No.	_
	lip valve dosing pump suitable for DB2/DS5			

hoses

supply hoses

stainless steel flexi hoses

universal hoses






No.	520008	Ref. No.	L3	8008
description	flex hose SS braid straight-curved DN12 connection 1: 3/4" connection 2: 3/4" L 1500mm approval DVGW operating p. 10bar test pressure 32bar burst p. 95bar			
For models:	K1300, POLY2000			
accessories for	520008			
0	No.	520054	Ref. No.	_
	flat gasket rubber ED ø 23.5mm ID ø 14mm thickness 2.3mm Qty 10			





drain hoses No. 530570 Ref. No. L3006 description drain hose DN21 L 2000mm A int. Ø 21mm A ext. Ø 25mm B int. Ø 20/29mm B ext. Ø 27/35mm outer hose Ø 25mm For models: K1000QBS, K1300, K400QS, K502QBS, K660, OCEANO50, OCEANO60, POLY1000, POLY1500, POLY2000

measuring equipment




fittings, hose and pipe connectors




ancillary products



fastening material



hexagonal nuts				
hexagonal nuts inch thread				
No.	507477	Ref. No.	L3311	
description	nut thread 1"	nut thread 1" ø 50mm H 7.5mm WS 36 brass Qty 1 pcs		
For models:	K10QT, K11Q	K10QT, K11QS, K12QS		





fasteners				
clamps				
hose clamps				
DIN 3017 - W2				
1				
No.	520112	Ref. No.	L3390	
description	hose clamp	hose clamp ø 12-20mm width 9mm Qty 10 pcs DIN 3017		
For models:	K1000QBS, K10QT, K11QS, K12QS, K1300, K400QS, K502QBS, K660, POLY1000, POLY1500, POLY2000, T40, T45, T50			

