

Professionall

Soluzioni professionali per attrezzature professionali



GAS COMPONENTS



ELECTRIC COMPONENTS



WATER TECHNOLOGY



MECHANICAL COMPONENTS




TOOLS


Spare parts suitable for

LA-SPAZIALE




heating elements


heating elements for coffee machine


			
1			
No.	417390	Ref. No.	806
description	heating element 1250W 220V heating circuits 1 L 135mm W 50mm H 22mm L1 24mm L2 36mm L3 75mm mounting distance 42mm thread 1/4" connection male faston 6.3mm connection length 22mm tube ø 8.3mm 2 hole fixing immersion heater		


			
1			
No.	417391	Ref. No.	7201
description	heating element 1250W 230V heating circuits 1 flange ø 50mm L 160mm W 22mm H 54mm tube ø 8.3mm connection male faston 6.3mm immersion heater		


			
1			
No.	417393	Ref. No.	7478
description	heating element 1250W 230V heating circuits 1 ø 65mm H 200mm W1 48mm H1 135mm H2 65mm mounting distance 32mm thread 3/8" copper windings 5 tube ø 8.5mm immersion heater 2 hole fixing connection male faston 6.3mm		


			
1			
No.	417038	Ref. No.	N/A
description	heating element 2700W 230V heating circuits 1 ø 110mm H 200mm W1 48mm H1 158mm H2 42mm mounting distance 40mm thread 3/8" copper windings 4 tube ø 8mm immersion heater 2 hole fixing connection M6		
accessories for	417038		
	No.	361183	Ref. No.
	nut thread 3/8" H 6mm nickel-plated brass WS 20 Qty 1 pcs		
	No.	521137	Ref. No.
	flat gasket fibre ED ø 20mm ID ø 18mm thickness 1.5mm for thread 3/8" Qty 1 pcs		

			
1			
No.	417394	Ref. No.	425
description	heating element 2700W 230V heating circuits 1 ø 112mm H 205mm W1 44mm H1 160mm H2 45mm mounting distance 30mm thread 3/8" copper windings 4 tube ø 8.5mm immersion heater connection male faston 6.3mm		

			
1			
No.	417387	Ref. No.	5504
description	heating element 2800W 230V heating circuits 3 mounting ø 50mm hole distance 63mm L 345mm W 35mm H 75mm L1 40mm L2 50mm L3 255mm H1 35mm H2 40mm tube ø 8.3mm connection male faston 6.3mm immersion heater 3 hole flange		

			
1			
No.	417389	Ref. No.	426
description	heating element 3500W 230V heating circuits 1 ø 115mm H 205mm W1 50mm H1 160mm H2 45mm mounting distance 32mm thread 3/8" copper windings 4 tube ø 8.5mm immersion heater 2 hole fixing connection male faston 6.3mm		

			
1			
No.	417388	Ref. No.	1724
description	heating element 3500W 230V heating circuits 3 mounting ø 50mm hole distance 63mm L 350mm W 35mm H 70mm L1 40mm L2 60mm L3 250mm H1 35mm H2 35mm hole ø 8mm tube ø 8.3mm connection male faston 6.3mm immersion heater 3 hole flange		

			
1			
No.	417386	Ref. No.	5505
description	heating element 3800W 230V heating circuits 3 mounting ø 50mm hole distance 63mm L 550mm W 35mm H 70mm L1 45mm L2 55mm L3 450mm H1 35mm H2 35mm hole ø 8mm tube ø 8.3mm connection male faston 6.3mm immersion heater 3 hole flange		



No.	417147	Ref. No.	5505
description	heating element 3800W 230V heating circuits 3 mounting \varnothing 51mm hole distance 63mm L 550mm W 38mm H 65mm hole \varnothing 10mm thermostat sleeves \varnothing 7mm length thermostat sleeves 245mm number of thermostat sleeves 1 thermostat sleeve not clinging tube \varnothing 8mm connection M6 immersion heater 3 hole flange		



No.	417392	Ref. No.	7356
description	heating element 800W 230V heating circuits 1 flange \varnothing 50mm L 160mm W 22mm H 54mm tube \varnothing 8.3mm connection male faston 6.3mm immersion heater		

heating elements for contact grills



No.	416145	Ref. No.	2987
description	heating element 1000W 230V L 177mm W 180mm H 18mm W1 46mm W2 88mm tube \varnothing 6.3mm windings 3 connection M4 dry heating element		



No.	416146	Ref. No.	5684
description	heating element 1200W 230V L 180mm W 228mm H 20mm W1 55mm W2 118mm connection length 23mm tube \varnothing 6.3mm windings 4 connection M4 dry heating element		



No.	416147	Ref. No.	5697
description	heating element 1500W 230V L 180mm W 175mm H 15mm W1 52mm W2 71mm connection length 22mm tube \varnothing 6.3mm windings 5 connection M4 dry heating element		



No.	416148	Ref. No.	2986
description	heating element 800W 230V heating circuits 1 L 175mm W 180mm H 20mm W1 46mm W2 118mm connection length 23mm tube \varnothing 6.3mm windings 3 connection M4 dry heating element		



No.	416173	Ref. No.	6521
description	heating element 850W 230V heating circuits 1 L 254mm W 202mm H 25mm W1 68mm W2 66mm connection length 23mm tube \varnothing 6.3mm windings 5 connection M4 number of thermostat sleeves 1 thermostat sleeves \varnothing 5mm length thermostat sleeves 195mm bridge length 240mm dry heating element		

accessories


washers



No.	560113	Ref. No.	1746 624
description	plain washer ID \varnothing 6.4mm ED \varnothing 12mm thickness 1.6mm SS Qty 20 pcs DIN 125A for thread M6		

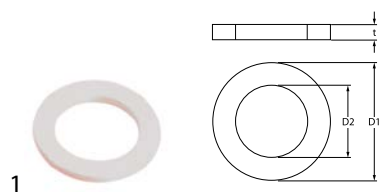
sealing washers

graphite gaskets




No.	528016	Ref. No.	N/A
description	flat gasket graphite ED \varnothing 62mm ID \varnothing 50mm thickness 2mm Qty 1 pcs		


PTFE gaskets


			
No.	528885	Ref. No.	424
description	flat gasket PTFE ED ø 26mm ID ø 17mm thickness 2mm Qty 1 pcs suitable for SPAZIALE		

O-rings

			
No.	510243	Ref. No.	02418
description	O-ring Viton thickness 3.53mm ID ø 55.56mm Qty 1 pcs		

flange gaskets


			
No.	528024	Ref. No.	N/A
description	gasket for heating element		


			
No.	528015	Ref. No.	N/A
description	gasket ID ø 55mm fibre thickness 2mm hole ø 8mm hole distance 62mm suitable for SPAZIALE for heating element coffee machine parts		

thermostats

bi-metal thermostats

safety bi-metal thermostats

			
No.	390590	Ref. No.	3343
description	bi-metal safety thermostat hole distance 24mm switch-off temp. °C 1NC 1-pole AV connection plug 2 hole fixing		

			
No.	390709	Ref. No.	6687
description	bi-metal safety thermostat switch-off temp. 180°C 1NC 1-pole 16A connection F6.3 screw mounting thread M4		

control and safety thermostats

EGO


safety thermostats

55.32_ series

			
No.	390324	Ref. No.	1477
description	safety thermostat switch-off temp. 169°C 3-pole 3NC 20A probe ø 4mm probe L 128mm capillary pipe 890mm capillary pipe isolated 210/210mm gland nut probe SS		

IMIT / TEMPOMATIC / AR THERMO


control thermostats

			
No.	390707	Ref. No.	11168 809
description	thermostat t.max. 130°C temperature range °C 1-pole NC 16A probe ø 7mm probe L 90mm capillary pipe 150mm capillary pipe isolated mm gland nut M14x1 shaft ø 6x4.6mm shaft L 23mm rotation 270°		

switches and momentary switches


rocker/momentary rocker switches

30x11mm



1

No.	301010	Ref. No.	805	
description	rocker switch mounting measurements 30x11mm red 1NO/indicator light 250V 16A 0-I connection male faston 6.3mm ambient temperature max. 85/125°C protection IP40			
accessories for	301010			
	No.	301035	Ref. No.	—
	protective cover mounting measurements 30x11mm			





30x22mm



1

No.	301001	Ref. No.	804
description	rocker switch mounting measurements 30x22mm red 2NO 250V 16A illuminated 0-I connection male faston 6.3mm ambient temperature max. 125/55°C protection IP65		

accessories for 301001



No.	301036	Ref. No.	—
description	protective cover internal size 30x22mm for rocker switch mounting measurementsmm		

push/momentary push switches

20.6x16.4mm



1

No.	347320	Ref. No.	4953
description	momentary push switch mounting measurements 20.6x16.4mm black 1NO 250V 12A connection male faston 6.3mm ambient temperature max. 85°C protection IP40		

28.5x28.5mm



1

No.	345142	Ref. No.	2942
description	push switch mounting measurements 28.5x28.5mm red/green 2NO 250V 16A cup connection male faston 6.3mm ambient temperature max. 150°C protection IP40 with indicator		



1

No.	347319	Ref. No.	2942
description	push switch mounting measurements 28.5x28.5mm green/red 2NO 250V 16A cup connection male faston 6.3mm ambient temperature max. 150°C protection IP40 with indicator		

spare parts for 347319



No.	345604	Ref. No.	—
description	element holder single mounting measurements 28.5x28.5mm black for push buttons 23x23mm		



No.	345720	Ref. No.	—
description	switch 2NO 250V 16A connection male faston 6.3mm		



No.	346251	Ref. No.	—
description	rotary disc orange/green disc ø 20.6mm		

miscellaneous



1

No.	347321	Ref. No.	5825
description	switch black 1NO 20V 1A momentary connection coded plug ambient temperature max. 85°C		

microswitches

pin-plunger actuated

M10



1

No.	347216	Ref. No.	607
description	microswitch with plunger thread M10x0.75 thread L 14mm 250V 10A 1CO connection male faston 6.3mm stroke 7.5mm mounting distance 22mm L 28mm ambient temperature max. 125°C type NR6K5 actuating force: 260g		




1

No.	345032	Ref. No.	607
description	microswitch with plunger thread M10x1 thread L 12mm 250V 16A 1CO connection male faston 6.3mm stroke 7mm mounting distance 22mm L 28mm ambient temperature max. 125°C type SP9603 actuating force: 180g		

system switches (ROLD)



1

No.	347192	Ref. No.	6619	
description	switch 2NO 250V 16A connection male faston 6.3mm			
accessories for	347192			
	No.	347183	Ref. No.	—
	push button mounting ø 14.3mm chrome-plated			

float switches

1			
No.	347337	Ref. No.	1322
description	float switch thread 1/8" 1NC ø 28mm L 100mm mounting ø 1/8"mm 230V 0.5A plug-in connection cable length 300mm		

rotary switches

GIOVENZANA

rotary switches

1			
No.	347323	Ref. No.	503
description	rotary switch 2 0-1 sets of contacts 2 type PO20 690V 20A shaft ø 5x5mm shaft L 28mm shaft square connection screw		

1			
No.	347326	Ref. No.	2496
description	rotary switch 2 0-1 sets of contacts 2 type PO20 690V 32A shaft ø 5x5mm shaft L 28mm shaft square connection screw 2 operating positions		

1			
No.	347324	Ref. No.	2620
description	rotary switch 2 0-1 sets of contacts 4 type PO20 690V 20A shaft ø 5x5mm shaft L 28mm shaft square connection screw		

1			
No.	347325	Ref. No.	5694
description	rotary switch 3 0-1-2 sets of contacts 6 type PO20 690V 20A shaft ø 5x5mm shaft L 23mm shaft square connection screw		

accessories

1			
No.	111344	Ref. No.	2421
description	knob zero mark ø 40mm shaftmm shaft diameter 5x5mm		

VM

1			
No.	347322	Ref. No.	504
description	rotary switch 0-1 36A shaft L 24mm connection screw 2 operating positions 4-pole CODE P501531 shaft 5x5mm		

accessories

levers

1			
No.	111342	Ref. No.	1611 4968 6049
description	lever for rotary switch ON-OFF L 80mm W 32mm aperture 5x5mm black		

magnetic switches

23x14mm

1			
No.	347339	Ref. No.	7635
description	magnetic switch L 23mm W 14mm NO connection male faston 2.8mm cable length 250mm		

ø 9mm

1			
No.	346107	Ref. No.	2727
description	magnetic switch NO connection male faston 6.3mm cable length 140mm L 31.5mm mounting ø 9mm		



lamps

indicator lights

indicator lights 2-piece (lens and indicator lamp)

indicator light lenses

ø10mm (type SRZ-3)



1

No.	359123	Ref. No.	1113
description	indicator light housings mounting measurements ø10mm green round Qty 1 pcs		
accessories for	359123		
	No.	359132	Ref. No. —
description	indicator lamp green 250V connection male faston 6.3mm protection IP54 ambient temperature max. 85°C		

indicator lamps for socket type SRZ / SDK / SDY / SFK



1

No.	359130	Ref. No.	1112 6593
description	indicator lamp 230V clear connection male faston 6.3mm ø 8mm		



1

No.	359573	Ref. No.	1112 6593
description	indicator lamp 230V connection plug-in connection ø 8mm		

indicator lights (complete)

30x11mm



1

No.	359158	Ref. No.	1096
description	indicator light mounting measurements 30x11mm 230V red connection male faston 6.3mm temp.-resist. 125°C		

relays

level relays

GIEMME



1

No.	402535	Ref. No.	5236
description	level controller 230V 50/60Hz type RL0 2 RELE+LIV/F		



1

No.	402532	Ref. No.	1964
description	level controller 230V type MAGNETIC+AUTOL.		



1

No.	401945	Ref. No.	N/A
description	level relay 230V voltage AC 5A connection male faston 6.3mm type RL1E/2C/F		

probes


producer-specific probes


probes




1


No.	379482	Ref. No.	2817
description	temperature probe NTC 200kOhm cable PTFE probe -40 up to +125°C cable -40 up to +250°C connection coded plug thread probe ø4x30mm cable length 0.14m		

1 			
No.	402551	Ref. No.	5060
description	temperature probe NTC cable PTFE probe -40 up to +125°C cable -40 up to +250°C connection male faston 2.8mm thread 3/8" probe ø5x10mm cable length 0.1m		

1 			
No.	379481	Ref. No.	1486 7540
description	temperature probe NTC cable PVC probe -40 up to +110°C cable -10 up to 100°C connection male faston 2.8mm thread probe ø4x30mm cable length 0.15m		


1 			
No.	379490	Ref. No.	6226
description	temperature probe PTC cable silicone probe -50 up to +150°C cable -50 up to +180°C connection 2-wire thread probe ø6x40mm cable length 1.2m		


Hall sensors


1 			
No.	402550	Ref. No.	3418
description	Hall sensor L 16mm W 16mm H 10mm for flow meter		


electronics


PCBs

1 			
No.	402513	Ref. No.	6683
description	display L 150mm W 98mm		


1 			
No.	402522	Ref. No.	7390
description	keypad PCB L 154mm W 49mm buttons 5		

1 			
No.	402520	Ref. No.	1485
description	keypad PCB L 31mm W 27mm buttons 1		

1 			
No.	402521	Ref. No.	6001
description	keypad PCB L 94mm W 64mm buttons 6		

1 			
No.	402508	Ref. No.	1561
description	PCB L 100mm W 60mm with button supply 240VAC		

1 			
No.	402506	Ref. No.	6682
description	PCB L 135mm W 100mm supply 230VAC		

1 			
No.	402498	Ref. No.	7389
description	PCB L 140mm W 80mm supply 230VAC		



1

No.	402499	Ref. No.	7522
description	PCB L 140mm W 80mm supply 230VAC		



1

No.	402536	Ref. No.	6263
description	PCB L 178mm W 100mm doser supply 230VAC		



1

No.	402493	Ref. No.	1584 1585
description	PCB L 200mm W 100mm for display PCB supply 230VAC		



1

No.	402505	Ref. No.	4850
description	PCB L 200mm W 100mm supply 230VAC		



1

No.	402510	Ref. No.	2948
description	PCB L 80mm W 55mm supply 24VAC		



1

No.	402511	Ref. No.	5067
description	PCB L 80mm W 55mm supply 24VAC		

central units



1

No.	402538	Ref. No.	6381
description	central unit 24V 5A		



1

No.	402512	Ref. No.	4951
description	central unit with display		

dosing electronics

GICAR

group 5



1

No.	403207	Ref. No.	N/A
description	dosing electronics 230V voltage AC 50/60Hz 10A type DOS 30/2GR+LIV		

GIEMME



1

No.	402533	Ref. No.	2473
description	dosing electronics 230V 50/60Hz 8A type RL0 2GR+RL/F		



1

No.	402534	Ref. No.	3200
description	dosing electronics 230V 50/60Hz 5-10A type RL2 4GR+RL+THE/F-C		

keypads

front foils



1

No.	402529	Ref. No.	1518
description	keypad foil coffee machine Super 3000 L 193mm W 60mm buttons 5		



1

No.	400499	Ref. No.	1521
description	keypad foil L 110mm W 38mm buttons 5		



1

No.	400500	Ref. No.	2475
description	keypad foil L 110mm W 38mm buttons 5		



1

No.	402531	Ref. No.	4643
description	keypad foil L 110mm W 38mm buttons 5		



1

No.	402530	Ref. No.	1519
description	keypad foil L 193mm W 59mm buttons 1		

membrane keypads



1

No.	403677	Ref. No.	08500
description	membrane keypad for espresso machine S5/S5 COMPACT buttons 5 L 75mm W 32mm		



1

No.	402523	Ref. No.	5805
description	membrane keypad L 108mm W 48mm		



1

No.	402524	Ref. No.	6308
description	membrane keypad L 135mm W 100mm		

keypad units



1

No.	402514	Ref. No.	1605
description	keypad unit buttons 1 lighting red L 70mm W 48mm		



1

No.	402516	Ref. No.	1598
description	keypad unit buttons 5 L 118mm W 43mm		



1

No.	402518	Ref. No.	2474
description	keypad unit buttons 5 L 118mm W 43mm		



1

No.	402519	Ref. No.	4848
description	keypad unit buttons 5 L 118mm W 43mm		

accessories



1

No.	402527	Ref. No.	7396
description	buttons strip buttons 5 L 154mm W 31mm		



1

No.	402528	Ref. No.	7397
description	buttons strip buttons 5 L 154mm W 31mm		



1

No.	402526	Ref. No.	7395
description	buttons strip buttons 5 L 156mm W 31mm		



1

No.	402525	Ref. No.	5498
description	buttons strip buttons 5 L 88mm W 64mm		



1

No.	347334	Ref. No.	6297
description	push button external size 28x40mm black		

KEYPADS/SOLENOID VALVES LA-SPAZIALE

solenoid valves

solenoid valves (water)

TP

solenoid valves with reducers



1

No.	370427	Ref. No.	3345
description	solenoid valve single angled 230VAC inlet 3/4" outlet 11.5mm input/ min output 1.2l/min DN10 t.max. 90°C TP plastic flow regulating valve outlet dark brown		

metal

ASCO

spare parts and accessories

O-rings



1

No.	371095	Ref. No.	625
description	O-ring Viton thickness 1.78mm ID ø 6.07mm Qty 1 pcs		





LUCIFER


3-way

131F series




1

No.	370053	Ref. No.	628	
description	solenoid valve 3-ways 230VAC DN 2.5mm slide-on receptacle DIN -10 up to 140°C type series 131F coil type DZ06S6 membranes FKM (water/steam) p max 10bar flange 32x32mm			
spare parts for	370053			
	No.	370061	Ref. No.	626
solenoid valve body LUCIFER-PARKER 3-ways outer cone				
	No.	371031	Ref. No.	—
solenoid coil LUCIFER-PARKER 230VAC 9VA coil type DZ06S6 seat ø 15mm				
accessories for	370053			
	No.	371090	Ref. No.	—
power socket plug type DIN 43650A screw				
	No.	371095	Ref. No.	625
O-ring Viton thickness 1.78mm ID ø 6.07mm Qty 1 pcs				

accessories for		370053	
	No.	371100	Ref. No.
	—		
	O-ring silicone thickness 1.78mm ID ø 6.07mm Qty 1 pcs		

spare parts and accessories


valve bodies

1			
No.	370061	Ref. No.	626
description	solenoid valve body LUCIFER-PARKER 3-ways outer cone		


ODE

solenoid valves steam (water)

21A series

1			
No.	370582	Ref. No.	4843
description	solenoid valve brass 2-ways 24VAC inlet 1/4" outlet 1/4" connection 1/4" L 40mm DN 5.5mm -10 up to 140°C ODE coil type BDA membranes FKM (water/steam) p max 3bar 50/60Hz		


31A1 series

1			
No.	370583	Ref. No.	1379
description	solenoid valve brass 3-ways 24VAC DN 1.5mm -10 up to 140°C ODE type series 31A1 coil type BDA membranes ruby p max 15bar p min 0bar flange 32x32mm 24V voltage AC		




PARKER

2-way


7121 series

1			
No.	370584	Ref. No.	907
description	solenoid valve SS 230VAC inlet 1/8" outlet 1/8" connection 1/8" DN 1.5mm coil type BDA p max 15bar 50Hz inlet 1/8"mm		


E-146 series


1			
No.	370067	Ref. No.	6478
description	solenoid valve 2-ways 230VAC connection 1/4" L 40mm DN 3mm slide-on receptacle DIN -20° up to 130°C PARKER type series VE-146 coil type ZB09 membranes FKM (water) p max 7bar		
spare parts for	370067		
	No.	371029	Ref. No.
	—		
	 solenoid coil PARKER 230VAC 9VA coil type ZB09 seat ø 14mm H 33mm W 34mm D 43mm		
accessories for	370067		
	No.	371090	Ref. No.
	—		
	 power socket plug type DIN 43650A screw		


Solenoid valve - accessories


1			
No.	371095	Ref. No.	625
description	O-ring Viton thickness 1.78mm ID ø 6.07mm Qty 1 pcs		

electrodes

1			
No.	402554	Ref. No.	6357
description	level electrode 1/4" total length 105mm probe L 87mm insulated probe length 74mm connection curved ø 3mm		


1			
No.	402555	Ref. No.	7852
description	level electrode 1/4" total length 130mm probe L 110mm insulated probe length 105mm connection curved ø 3mm		

1			
No.	400020	Ref. No.	911
description	level electrode 1/4" total length 150mm probe L 124mm insulated probe length 26mm connection male faston 6.3mm stainless steel ø 2.5mm		



1

No.	402553	Ref. No.	911
description	level electrode 1/4" total length 155mm probe L 136mm insulated probe length 124mm connection curved ø 3mm		



1

No.	402556	Ref. No.	6368
description	level electrode total length 303mm connection curved SS ø 3mm		

flow meters and flow sensors


flow meters

miscellaneous



1

No.	402542	Ref. No.	2498
description	flow meter thread 1/4" SS		




1


No.	402550	Ref. No.	3418
description	Hall sensor L 16mm W 16mm H 10mm for flow meter		

pumps

pumps for ice machines




1

No.	500161	Ref. No.	2980
description	pump REBO type NR40 55W 230V 50Hz outlet ø 17mm L 110mm rotation direction left for ice-cube maker		
spare parts for	500161		
	No.	500970	Ref. No. —
pump motor 55W 230V 50Hz REBO L 205mm type outlet ømm suitable for for ice maker			

fuses

fine fuses



1

No.	358605	Ref. No.	6249
description	fine fuse size ø5x20mm 3.15A slow-acting rated 250V Qty 10 pcs		

equipment-specific units

for bar blender

blenders

jar components

blades

blades with adaptor (complete)



1

No.	696742	Ref. No.	C0007F305
description	slicing unit ø 52mm P100/P102/P103/P105		

for ice-cube maker

drain systems

overflow pipes



1

No.	695083	Ref. No.	6120
description	overflow pipe ID ø 22mm D1 ø 27mm D2 ø 19mm L 144mm		

for espresso machines

fascias



1

No.	692672	Ref. No.	01591
description	side panel L 180mm H 67mm D 30 mounting pos. left Super 3000		



1

No.	692673	Ref. No.	01592
description	side panel L 180mm H 67mm D 30 mounting pos. right Super 3000		

filter holders

filter holders standard

filter holder without spout



1

No.	525986	Ref. No.	N/A
description	filter holder suitable for SPAZIALE without outlet mounting ø 76mm outlet 3/8" ID ø 56mm wedge height 12mm wedge position horizontal number of wedges 2 lever straight		

filter holders short



1

No.	525165	Ref. No.	2891
description	filter holder mounting ø 76mm outlet 3/8" ID ø 56mm handle M12x1.25 wedge height 12mm wedge position horizontal number of wedges 2 lever straight chrome-plated brass		
accessories for	525165		
	No.	525127	Ref. No. 4962
	handle ø 25mm thread M12x1.25 thread L 12mm L 122mm black thermoplastic		



1

No.	529060	Ref. No.	N/A
description	filter holder mounting ø 76mm outlet 3/8" ID ø 56mm handle M12x1.75 wedge height 12mm wedge position horizontal number of wedges 2 lever straight chrome-plated brass		
accessories for	529060		
	No.	529045	Ref. No. —
	handle ø 35mm thread M12x1.75 thread L 15mm L 125mm black		

handles

with external thread



1

No.	525127	Ref. No.	4962
description	handle ø 25mm thread M12x1.25 thread L 12mm L 122mm black thermoplastic		

sleeves



1

No.	525139	Ref. No.	4961 9924
description	sleeve ø 36mm L 38mm black		

filters

for 1 cup



1

No.	525156	Ref. No.	1945
description	coffee filter ø 65mm mounting ø 55mm H 23.3mm cups 1 amount of coffee 6g		



1

No.	529029	Ref. No.	646
description	coffee filter ø 65mm mounting ø 55mm H 25mm cups 1 amount of coffee 7g		

for 2 cups



1

No.	525155	Ref. No.	1943
description	coffee filter ø 65mm mounting ø 55mm H 25.7mm cups 2 amount of coffee 12g		



1

No.	529030	Ref. No.	645
description	coffee filter ø 65mm mounting ø 55mm H 27.5mm cups 2 amount of coffee 14g		

blind filters



1

No.	529064	Ref. No.	647
description	blind filter ø 65mm mounting ø 55mm H 25mm		

filter holder springs



1

No.	529065	Ref. No.	649 7051
description	filter holder spring L 70mm W 60mm wire gauge ø 1.1mm for espresso filter holder		

brewing units

shower screens

2-piece



1

No.	529090	Ref. No.	2908+2909
description	shower screen ø 51.6/49.1mm H 3.6/2.3mm hole ø 5.5mm 2-piece		

filter holder gaskets

flat

standard



1

No.	528086	Ref. No.	1939
description	filter holder gasket D1 ø 64.5mm D2 ø 52.5mm H 6.3mm Qty 1 pcs		



1

No.	528041	Ref. No.	1968
description	filter holder gasket D1 ø 64.5mm D2 ø 52.5mm H 6.65mm		

brewing units manual

components

levers

accessories



1

No.	525151	Ref. No.	618
description	bolt with ball ø 6mm L 12mm		

magnets



1

No.	525122	Ref. No.	614
description	magnet thread M5 for solenoid valve H 23mm ED ø 49mm ID ø 15mm		

components

nozzles

without thread



1

No.	525121	Ref. No.	276
description	nozzle bore ø 0.57mm ø 5mm D1 ø 6.5mm L 10mm		



1

No.	528888	Ref. No.	276
description	nozzle bore ø 0.65mm ø 5mm D1 ø 6.5mm L 10mm		

gaskets



1

No.	529190	Ref. No.	1631
description	O-ring Viton thickness 2.62mm ID ø 31.42mm Qty 1 pcs		

safety valves

safety valves

1/2"



1

No.	525125	Ref. No.	1932
description	safety valve connection 1/2" triggering pressure 1.7bar approval CE 0036 sealed		

3/8"



1

No.	529312	Ref. No.	381
description	safety valve connection 3/8" triggering pressure 1.8bar		

expansion valves

with hose connection



1

No.	525123	Ref. No.	288
description	expansion valve T1: 1/4" ET hose ø 6.5mm total length 78mm		



1

No.	525124	Ref. No.	1626
description	expansion valve T1: 1/4" ET hose ø 9mm total length 78mm		

compression springs



1

No.	525118	Ref. No.	292
description	compression spring ø 14.3mm L 30.5mm wire gauge ø 2mm		

drain pans

drain pans



1

No.	525157	Ref. No.	1590
description	drain pan L 100mm W 72mm H 75mm hose ø 10/16mm hose length 20/25mm		

aerators and air bleeders



1

No.	527981	Ref. No.	508
description	aerator and air bleeder connection 1/4"		

steam/water taps


steam/water taps

steam/water taps




1

No.	525126	Ref. No.	217
description	steam/water tap inlet 1/4" outlet 3/8" shaft 5x7 shaft L 6mm brass		

			
1			
No.	529610	Ref. No.	216
description	steam/water tap inlet 3/8" outlet 3/8" shaft 5x7 shaft L 6mm brass		

steam taps

miscellaneous

			
1			
No.	525154	Ref. No.	233
description	disc ø 8mm thickness 1mm		


steam/water pipes


steam pipes


			
1			
No.	529613	Ref. No.	1838
description	steam pipe mounting pos. left		


			
1			
No.	525133	Ref. No.	7546
description	steam pipe mounting pos. left thread 3/8" H 160mm tube ø 8mm chrome-plated brass		

			
1			
No.	525132	Ref. No.	4832
description	steam pipe mounting pos. left thread 3/8" H 180mm tube ø 8mm chrome-plated brass		

			
1			
No.	525116	Ref. No.	1838
description	steam pipe mounting pos. left thread 3/8" H 210mm tube ø 8mm chrome-plated brass		

			
1			
No.	525131	Ref. No.	4831
description	steam pipe mounting pos. right thread 3/8" H 180mm tube ø 8mm chrome-plated brass		


			
1			
No.	525117	Ref. No.	1839
description	steam pipe mounting pos. right thread 3/8" H 210mm tube ø 8mm chrome-plated brass		

			
1			
No.	529612	Ref. No.	1839
description	steam pipe mounting pos. right thread 3/8" H 210mm tube ø 8mm chrome-plated brass		


			
1			
No.	525159	Ref. No.	7832
description	steam pipe thread 3/8" H 160mm tube ø 10mm SS		


			
1			
No.	525158	Ref. No.	6591
description	steam pipe thread 3/8" H 170mm tube ø 10mm SS		


			
1			
No.	525130	Ref. No.	4473
description	steam pipe thread 3/8" H 180mm tube ø 10mm SS		


			
1			
No.	525129	Ref. No.	825
description	steam pipe thread 3/8" H 210mm tube ø 8mm chrome-plated brass		

water pipes			
			
1			
No.	525128	Ref. No.	2686
description	water pipe thread 3/8" ø 25mm L 87mm tube ø 12mm WS 20 chrome-plated brass		


accessories			
bushes			
			
1			
No.	529705	Ref. No.	7579
description	bush D1 ø 8.3mm D2 ø 12mm H 6mm brass ID ø 7mm		


gaskets			
			
1			
No.	528402	Ref. No.	807
description	O-ring Viton thickness 2.62mm ID ø 10.78mm Qty 1 pcs		


springs			
			
1			
No.	525162	Ref. No.	5327
description	compression spring ø 11.5mm L 19mm wire gauge ø 1.7mm stainless steel		


			
1			
No.	529704	Ref. No.	7568
description	compression spring ø 11.8mm L 16mm wire gauge ø 1.6mm steel		

miscellaneous			
			
1			
No.	528898	Ref. No.	523
description	plain washer ID ø 11.2mm ED ø 14.8mm thickness 1mm SS		

union nuts			
			
1			
No.	528899	Ref. No.	524
description	union nut thread 3/8" L 22mm hole ø 12mm brass		

fine filters			
			
1			
No.	525161	Ref. No.	2284
description	fine filter flat fabric ø 8mm H 1.5mm		

			
1			
No.	528889	Ref. No.	275
description	fine filter flat with rim ø 7mm		

intake valves			
accessories			
levers			
			
1			
No.	111343	Ref. No.	1837
description	lever thread M8 ø 18/22mm plastic		

level glasses

level glasses

gaskets



1			
No.	529427	Ref. No.	266
description	gasket D1 ø 13mm D2 ø 17.5mm ID ø 11mm H 9mm rubber water level glass suitable for PAVONI		



1			
No.	525164	Ref. No.	265
description	gasket D1 ø 14mm D2 ø 17mm ID ø 10.78mm H 9mm silicone		



1			
No.	525163	Ref. No.	266
description	gasket D1 ø 14mm D2 ø 17mm ID ø 10.8mm H 9mm Viton		

level glass pipes



1			
No.	529404	Ref. No.	267 268
description	water level tube ø 11mm H 150mm ID ø 8mm		



1			
No.	529405	Ref. No.	267 268
description	water level tube ø 11mm H 150mm ID ø 8mm		

non-return valves

gaskets



1			
No.	528425	Ref. No.	290
description	gasket D1 ø 14.9mm D2 ø 6mm total length 8.9mm L1 4mm L2 4.9mm		

compression springs



1			
No.	525119	Ref. No.	279
description	compression spring ø 8mm L 28mm wire gauge ø 0.4mm		

pistons



1			
No.	528886	Ref. No.	280
description	valve triangular ø 12mm L 22mm		

for coffee grinders

grinding burrs

grinding burrs conical



1			
No.	527705	Ref. No.	8785 C0004M122B
description	grinding burrs pair turn direction right D1 ø 63mm D2 ø 40mm H 23.5mm shaft ø 13mm		

knobs

steam/water taps

steam/water taps




1			
No.	525134	Ref. No.	249
description	turning handle ø 33mm shaft ø 6.5x8mm black		



gaskets


O-rings

EPDM



No.	529545	Ref. No.	5328
------------	--------	-----------------	------

description O-ring EPDM thickness 1.78mm ID ø 10.82mm Qty 1 pcs



No.	528485	Ref. No.	586
------------	--------	-----------------	-----

description O-ring EPDM thickness 1.78mm ID ø 6.07mm Qty 1 pcs



No.	529412	Ref. No.	1472
------------	--------	-----------------	------

description O-ring EPDM thickness 2.62mm ID ø 10.78mm Qty 1 pcs



No.	525608	Ref. No.	7580
------------	--------	-----------------	------

description O-ring EPDM thickness 2.7mm ID ø 12.1mm



No.	361080	Ref. No.	08289
------------	--------	-----------------	-------

description O-ring EPDM thickness 2mm ID ø 16mm Qty 1 pcs



No.	361085	Ref. No.	281
------------	--------	-----------------	-----

description O-ring EPDM thickness 2mm ID ø 8mm Qty 1 pcs

silicone



No.	528222	Ref. No.	1470
------------	--------	-----------------	------

description O-ring silicone thickness 2.62mm ID ø 10.78mm Qty 1 pcs

Viton




No.	528833	Ref. No.	1470
------------	--------	-----------------	------

description O-ring Viton thickness 1.78mm ID ø 11.11mm Qty 1 pcs



No.	528687	Ref. No.	219
------------	--------	-----------------	-----

description O-ring Viton thickness 1.78mm ID ø 3.69mm Qty 1 pcs



No.	371095	Ref. No.	625
------------	--------	-----------------	-----

description O-ring Viton thickness 1.78mm ID ø 6.07mm Qty 1 pcs




No.	528282	Ref. No.	281
------------	--------	-----------------	-----


description O-ring Viton thickness 1.78mm ID ø 7.66mm Qty 1 pcs





No.	528246	Ref. No.	1469
------------	--------	-----------------	------


description O-ring Viton thickness 1.78mm ID ø 8.73mm Qty 1 pcs


			
No.	528402	Ref. No.	807
description	O-ring Viton thickness 2.62mm ID ø 10.78mm Qty 1 pcs		


			
No.	528291	Ref. No.	1472
description	O-ring Viton thickness 2.62mm ID ø 11.91mm Qty 1 pcs		


			
No.	528647	Ref. No.	1468
description	O-ring Viton thickness 2.62mm ID ø 15.08mm Qty 1 pcs		


			
No.	528293	Ref. No.	1471
description	O-ring Viton thickness 2.62mm ID ø 15.88mm Qty 1 pcs		

			
No.	532560	Ref. No.	225
description	O-ring Viton thickness 2.62mm ID ø 20.63mm Qty 1 pcs		


			
No.	529190	Ref. No.	1631
description	O-ring Viton thickness 2.62mm ID ø 31.42mm Qty 1 pcs		

			
No.	525146	Ref. No.	7418
description	O-ring Viton thickness 2.62mm ID ø 42.52mm Qty 1 pcs		

			
No.	525147	Ref. No.	4553
description	O-ring Viton thickness 3.53mm ID ø 142.5mm Qty 1 pcs		


			
No.	510243	Ref. No.	02418
description	O-ring Viton thickness 3.53mm ID ø 55.56mm Qty 1 pcs		

miscellaneous


			
No.	525608	Ref. No.	7580
description	O-ring EPDM thickness 2.7mm ID ø 12.1mm		

sealing washers


fibre gaskets

			
No.	525149	Ref. No.	899
description	flat gasket fibre ED ø 93mm ID ø 81mm thickness 2mm for boiler Qty 1 pcs		


graphite gaskets


			
No.	528016	Ref. No.	N/A
description	flat gasket graphite ED ø 62mm ID ø 50mm thickness 2mm Qty 1 pcs		


PTFE gaskets

			
No.	528885	Ref. No.	424
description	flat gasket PTFE ED ø 26mm ID ø 17mm thickness 2mm Qty 1 pcs suitable for SPAZIALE		




			
1			
No.	528683	Ref. No.	225
description	flat gasket PTFE ED ø 26mm ID ø 21mm thickness 2mm Qty 1 pcs suitable for GAGGIA, SPAZIALE		

			
1			
No.	528131	Ref. No.	405
description	flat gasket PTFE ED ø 52mm ID ø 40mm thickness 2mm Qty 1 pcs		


			
1			
No.	528149	Ref. No.	405
description	flat gasket PTFE ED ø 85mm ID ø 72mm thickness 2mm Qty 1 pcs suitable for SPAZIALE		


Viton gaskets

			
1			
No.	528686	Ref. No.	00221
description	gasket Viton ED ø 15mm ID ø 6mm thickness 3.5mm Qty 1 pcs		

special gaskets

group gaskets


			
1			
No.	528147	Ref. No.	N/A
description	group gasket		


			
1			
No.	525148	Ref. No.	485
description	gasket ED ø 34mm ID ø 18mm H 6.3mm		

springs


compression springs


			
1			
No.	525162	Ref. No.	5327
description	compression spring ø 11.5mm L 19mm wire gauge ø 1.7mm stainless steel		


			
1			
No.	529704	Ref. No.	7568
description	compression spring ø 11.8mm L 16mm wire gauge ø 1.6mm steel		


			
1			
No.	525118	Ref. No.	292
description	compression spring ø 14.3mm L 30.5mm wire gauge ø 2mm		


			
1			
No.	525120	Ref. No.	223
description	compression spring ø 14.4mm L 26mm wire gauge ø 1.8mm		


			
1			
No.	528684	Ref. No.	223
description	compression spring ø 14.5mm L 33mm wire gauge ø 2.1mm		


			
1			
No.	528475	Ref. No.	292
description	compression spring ø 14.7mm L 33mm wire gauge ø 2mm		

			
1			
No.	528257	Ref. No.	522
description	compression spring ø 15mm L 17mm wire gauge ø 1.8mm		


			
1			
No.	528894	Ref. No.	1624
description	compression spring ø 21.7mm L 40mm wire gauge ø 1.3mm		


			
1			
No.	528887	Ref. No.	1625
description	compression spring ø 6.5mm L 13mm wire gauge ø 0.9mm		


			
1			
No.	525119	Ref. No.	279
description	compression spring ø 8mm L 28mm wire gauge ø 0.4mm		


			
1			
No.	528392	Ref. No.	279
description	compression spring ø 8mm L 29mm wire gauge ø 0.5mm		


manometers


			
1			
No.	541735	Ref. No.	1481
description	manometer double scale ø 58mm pressure range 0-2.5 / 0-15bar connection on the backside thread 1/8"		


			
1			
No.	541737	Ref. No.	5044
description	manometer double scale ø 58mm pressure range 0-2.5 / 0-15bar connection on the backside thread 1/8"		


			
1			
No.	541233	Ref. No.	N/A
description	manometer double scale ø 60mm pressure range 0-2.5 / 0-15bar connection on the backside thread 1/8"		

			
1			
No.	541287	Ref. No.	N/A
description	manometer double scale ø 60mm pressure range 0-2.5 / 0-15bar connection on the backside thread 1/8"		

			
1			
No.	541410	Ref. No.	N/A
description	manometer double scale ø 60mm pressure range 0-2.5 / 0-15bar connection on the backside thread 1/8"		

			
1			
No.	541222	Ref. No.	N/A
description	manometer double scale ø 60mm pressure range 0-2.5 / 0-16bar connection on the backside thread 1/8"		

			
1			
No.	541226	Ref. No.	N/A
description	manometer double scale ø 60mm pressure range 0-2.5 / 0-16bar connection on the backside thread 1/8"		

			
1			
No.	541227	Ref. No.	N/A
description	manometer double scale ø 60mm pressure range 0-2.5 / 0-16bar connection on the backside thread 1/8"		



1

No.	541224	Ref. No.	N/A
description	manometer double scale ø 63mm pressure range 0-2.5 / 0-15bar connection on the backside thread 1/8"		



1

No.	541740	Ref. No.	6738
description	manometer ø 42mm pressure range 0-16bar thread 1/8" connection on the backside		



1

No.	541739	Ref. No.	6237
description	manometer ø 42mm pressure range 0-2.5bar thread 1/8" connection on the backside		



1

No.	541741	Ref. No.	6737
description	manometer ø 43mm pressure range 0-2.5bar thread 1/8" connection on the backside		



1

No.	541738	Ref. No.	2047
description	manometer ø 58mm pressure range 0-2.5bar connection on the backside marking 1.35-2.5 thread 1/4"		

fastening material

screws

hexagonal screws



1

No.	560274	Ref. No.	643
description	hexagonal screw thread M5 thread L 25mm SS WS 8 without pole Qty 20 pcs DIN 933 / ISO 4017		

cylinder head bolts

DIN 912/ISO 4762



1

No.	560025	Ref. No.	669
description	cylinder head bolt thread M4 thread L 10mm WS 3 SS Qty 20 pcs DIN 912/ISO 4762		

nuts

wing nuts



1

No.	560147	Ref. No.	4939
description	wing nuts thread M6 SS DIN/ISO DIN 315 Qty 20 pcs		

hexagonal nuts

hexagonal nuts inch thread



1

No.	503045	Ref. No.	07063
description	nut thread 1/4" H 4.5mm brass WS 17 Qty 1 pcs		

washers

washers

DIN 125A



1

No.	560113	Ref. No.	1746 624
description	plain washer ID ø 6.4mm ED ø 12mm thickness 1.6mm SS Qty 20 pcs DIN 125A for thread M6		



miscellaneous



1

No.	528898	Ref. No.	523
description	plain washer ID ø 11.2mm ED ø 14.8mm thickness 1mm SS		



1

No.	560413	Ref. No.	241
description	plain washer ID ø 17mm ED ø 25mm thickness 0.8mm SS		



1

No.	560412	Ref. No.	1131
description	plain washer ID ø 5mm ED ø 8mm thickness 1mm brass		

fasteners

retaining rings

DIN 472



1

No.	525153	Ref. No.	487
description	retaining ring bore ø 32mm thickness 1.1mm DIN 472		

DIN 6799



1



No.	518557	Ref. No.	634
description	retaining ring E D1 ø 5mm D2 ø 11mm SS DIN 6799 thickness 0.7mm		

consumables

fuses

fine fuses



1

No.	358605	Ref. No.	6249
description	fine fuse size ø5x20mm 3.15A slow-acting rated 250V Qty 10 pcs		