

Professionall

Solutii profesionale pentru echipamente profesionale



GAS COMPONENTS



ELECTRIC COMPONENTS



WATER TECHNOLOGY



MECHANICAL COMPONENTS



TOOLS

Spare parts suitable for

LASA

heating elements

heating elements for pasta cookers

			
No.	415020	Ref. No.	3205500+2188400
description	heating element 4500W 230V mounting ø 57.5mm heating circuits 3 L 355mm W 35mm H 47mm number of thermostat sleeves 1 thermostat sleeves ø 7mm length thermostat sleeves 295mm thermostat sleeve upper tube ø 8.5mm hole distance 70mm hole ø 10mm connection length 25mm connection male faston 6.3mm 3 hole flange immersion heater		

heating elements for salamanders/toast-

			
No.	415938	Ref. No.	320803 3208030
description	heating element 1800W 230V heating circuits 1 L 330mm W 82mm H 25mm thread M10x1 mounting distance 72mm tube ø 6.3mm 2 hole fixing connection length 20mm immersion heater		
accessories for	415938		
	No.	510416	Ref. No. —
	flat gasket fibre ED ø 19mm ID ø 10.5mm thickness 1.5mm for thread M10 Qty 1 pcs		
	No.	510893	Ref. No. —
	O-ring EPDM thickness 2.62mm ID ø 9.92mm Qty 1 pcs		
	No.	520231	Ref. No. —
	nut thread M10x1 H 6mm WS 14 zinc-coated steel Qty 1 pcs		
	No.	521129	Ref. No. —
	nut thread M10 H 6mm SS WS 17 Qty 1 pcs DIN/ISO DIN 439		

immersion heating elements


3 hole flange ø47.5mm


			
No.	416205	Ref. No.	3202500 4194
description	heating element 3000W 230V heating circuits 1 L 260mm W 29mm H 35mm number of thermostat sleeves 1 thermostat sleeves ø 10mm length thermostat sleeves 214mm tube ø 6.2mm hole distance 65mm hole ø 8mm connection M4 immersion heater		
spare parts for	416205		
	No.	510408	Ref. No.
	O-ring EPDM thickness 5.34mm ID ø 47mm Qty 1 pcs		
	218800 2188000 218840 2188400		

accessories for	416205		
	No.	510562	Ref. No. —
	O-ring silicone thickness 5.34mm ID ø 47mm Qty 1 pcs		

			
No.	415935	Ref. No.	103705400 320801 3208010
description	heating element 4500W 230V mounting ø 47.5mm heating circuits 3 L 320mm W 34mm H 30mm number of thermostat sleeves 1 thermostat sleeves ø 7mm length thermostat sleeves 300mm thermostat sleeve eccentric, clinging tube ø 6.3mm hole distance 63mm hole ø 10mm connection male faston 6.3mm 3 hole flange immersion heater		
spare parts for	415935		
	No.	510408	Ref. No.
	O-ring EPDM thickness 5.34mm ID ø 47mm Qty 1 pcs		
	218800 2188000 218840 2188400		
accessories for	415935		
	No.	510562	Ref. No. —
	O-ring silicone thickness 5.34mm ID ø 47mm Qty 1 pcs		


			
No.	418686	Ref. No.	3201500 3206000 320808 3208080 4306
description	heating element 6000W 230V mounting ø 47.5mm heating circuits 3 L 350mm W 35mm H 40mm number of thermostat sleeves 1 thermostat sleeves ø 7mm length thermostat sleeves 220mm thermostat sleeve clinging tube ø 6.3mm hole distance 63mm hole ø 8mm connection length 7mm connection M4 3 hole flange immersion heater		
accessories for	418686		
	No.	510408	Ref. No.
	O-ring EPDM thickness 5.34mm ID ø 47mm Qty 1 pcs		
	218800 2188000 218840 2188400		
	No.	510562	Ref. No. —
	O-ring silicone thickness 5.34mm ID ø 47mm Qty 1 pcs		


 			
No.	418687	Ref. No.	320816 3208160
description	heating element 8800W 230V mounting ø 47.5mm heating circuits 3 L 550mm W 35mm H 40mm number of thermostat sleeves 1 thermostat sleeves ø 7mm length thermostat sleeves 235mm thermostat sleeve clinging tube ø 6.3mm hole distance 63mm hole ø 8mm connection length 7mm connection M4 3 hole flange immersion heater		
accessories for	418687		
	No.	510408	Ref. No. 218800 2188000 218840 2188400
	O-ring EPDM thickness 5.34mm ID ø 47mm Qty 1 pcs		
	No.	510562	Ref. No. —
	O-ring silicone thickness 5.34mm ID ø 47mm Qty 1 pcs		

 			
No.	417165	Ref. No.	320700 3207000
description	heating element 2470/2940W 220/240V mounting ø 47.5mm heating circuits 1 L 196mm W 35mm H 45mm number of thermostat sleeves 1 thermostat sleeves ø 9mm length thermostat sleeves 170mm thermostat sleeve upper tube ø 6.4mm hole distance 63mm connection length 23mm connection M4 immersion heater		
accessories for	417165		
	No.	510408	Ref. No. 218800 2188000 218840 2188400
	O-ring EPDM thickness 5.34mm ID ø 47mm Qty 1 pcs		
	No.	510562	Ref. No. —
	O-ring silicone thickness 5.34mm ID ø 47mm Qty 1 pcs		
	No.	521103	Ref. No. —
	nut thread M4 H 3mm WS 7 brass Qty 20 pcs		
	No.	521104	Ref. No. —
	washer ID ø 4.3mm ED ø 8mm thickness 0.5mm brass Qty 20 pcs for thread M4		
	No.	560111	Ref. No. —
	plain washer ID ø 4.3mm ED ø 9mm thickness 0.8mm SS Qty 20 pcs DIN 125A for thread M4		
	No.	560131	Ref. No. —
	hexagonal nut thread M4 H 3.2mm WS 7 SS DIN/ISO DIN 934 / ISO 4032/8673 Qty 20 pcs		

group 8			
			
No.	418636	Ref. No.	320809 3208090
description	heating element 4500W 230V mounting ø 47.5mm heating circuits 3 L 290mm W 28mm H 45mm H1 25mm H2 20mm tube ø 6mm hole distance 62mm hole ø 8x10mm 3 hole flange immersion heater		
spare parts for	418636		
	No.	510408	Ref. No. 218800 2188000 218840 2188400
	O-ring EPDM thickness 5.34mm ID ø 47mm Qty 1 pcs		
	No.	521030	Ref. No. —
	O-ring Viton thickness 5.34mm ID ø 47mm Qty 1 pcs		

3 hole flange ø57.5mm

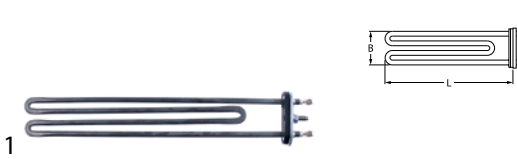
 			
No.	415934	Ref. No.	320804 3208040
description	heating element 3500W 230V mounting ø 57.5mm heating circuits 3 L 192mm W 38mm H 50mm number of thermostat sleeves 1 thermostat sleeves ø 7.5mm length thermostat sleeves 180mm thermostat sleeve eccentric, clinging tube ø 8.5mm hole distance 72mm hole ø 8mm connection male faston 6.3mm 3 hole flange immersion heater		

 			
No.	415020	Ref. No.	3205500+2188400
description	heating element 4500W 230V mounting ø 57.5mm heating circuits 3 L 355mm W 35mm H 47mm number of thermostat sleeves 1 thermostat sleeves ø 7mm length thermostat sleeves 295mm thermostat sleeve upper tube ø 8.5mm hole distance 70mm hole ø 10mm connection length 25mm connection male faston 6.3mm 3 hole flange immersion heater		

			
No.	415021	Ref. No.	320802 3208020
description	heating element 6000W 230V mounting ø 57.5mm heating circuits 3 L 343mm W 37mm H 50mm number of thermostat sleeves 1 thermostat sleeves ø 7mm length thermostat sleeves 294mm thermostat sleeve not clinging tube ø 8.5mm hole distance 72mm hole ø 8mm connection M5 3 hole flange		
spare parts for	415021		
	No.	510409	Ref. No. 218845 2188450
accessories for	415021		
	No.	550002	Ref. No. —
tension strap H 10mm L 21mm W 10mm hole ø 6.5mm for heating element			

			
No.	415937	Ref. No.	320805 3208050
description	heating element 9000W 230V mounting ø 57.5mm heating circuits 3 L 340mm W 37mm H 52mm number of thermostat sleeves 1 thermostat sleeves ø 7mm length thermostat sleeves 300mm thermostat sleeve clinging tube ø 8.5mm hole distance 72mm hole ø 8mm connection M5 3 hole flange immersion heater		
spare parts for	415937		
	No.	510409	Ref. No. 218845 2188450
O-ring EPDM thickness 5.34mm ID ø 56.52mm Qty 1 pcs			

with compression flange 62 x 26mm

			
No.	415266	Ref. No.	10714
description	heating element 2000W 230V heating circuits 1 compression flange flange 62x26mm L 300mm W 41mm Hmm connection male faston 6.3mm tube ø 6.3mm immersion heater		

accessories

sealing washers

O-rings

			
No.	510408	Ref. No.	218800 2188000 218840 2188400
description	O-ring EPDM thickness 5.34mm ID ø 47mm Qty 1 pcs		

			
No.	510409	Ref. No.	218845 2188450
description	O-ring EPDM thickness 5.34mm ID ø 56.52mm Qty 1 pcs		

thermostats

bi-metal thermostats

bi-metal thermostats

			
No.	390232	Ref. No.	326722 3267220
description	bi-metal thermostat switch-off temp. 55°C 1-pole		



control and safety thermostats

EGO


control thermostats

55.10/19_ series



No.	375211	Ref. No.	326732 3267320
description	thermostat t.max. 85°C temperature range 30-85°C 1-pole 1CO 16A probe ø 6mm probe L 130mm capillary pipe 900mm capillary pipe isolated 900mm gland nut shaft L 23mm shaft position upper rotation 270° probe material SS		

55.34_ series



No.	375210	Ref. No.	326724 3267240
description	thermostat t.max. 90°C temperature range 38-90°C 3-pole 3CO 16A probe ø 6mm probe L 215mm capillary pipe 900mm capillary pipe isolated 900mm gland nut shaft Lmm rotation 270°		

safety thermostats


55.32_ series



No.	375209	Ref. No.	326726 3267260
description	safety thermostat switch-off temp. 140°C 3-pole 20A probe ø 6mm probe L 89mm capillary pipe 900mm capillary pipe isolated 900mm gland nut probe SS		

IMIT / TEMPOMATIC / ARTHERMO

control thermostats



No.	390006	Ref. No.	326400 3264000
description	thermostat t.max. 86°C temperature range 0-86°C 1-pole 1CO 16A probe ø 6.5mm probe L 95mm capillary pipe 1500mm capillary pipe isolatedmm gland nut shaft ø 6x4.6mm shaft L 19mm rotation 270°		

accessories for 390006

No.	110100	Ref. No.	—
description	knob thermostat t.max. 90°C 0-90°C ø 42mm shaft ø 6x4.6mm shaft flat -135° black		
No.	110105	Ref. No.	—
description	rosette knob ø 42mm ø 56mm zero mark		

safety thermostats



No.	390601	Ref. No.	326710 3267100
description	safety thermostat switch-off temp. 120°C 1-pole 16A probe ø 6.5mm probe L 93mm capillary pipe 1500mm capillary pipe isolated 1440mm gland nut probe		

accessories

gland nut accessories

locking screws



No.	550913	Ref. No.	241729 2417290
description	union screw thread M12x1 probe ø max. 6mm WS 12 brass		

plunger sockets



1

No.	541519	Ref. No.	241738 2417380
description	thermowell IT M10x1 ET M14x1.5 L 33mm brass single ø 10.5mm		
accessories for	541519		
No.	521101	Ref. No.	—
	nut thread M14x1.5 H 5mm WS 19 SS Qty 1 pcs		



switches and momentary switches

rocker/momentary rocker switches

30x22mm

1 				
	No.	347704	Ref. No.	316720 3167200
description	momentary rocker switch mounting measurements 30x22mm red 2CO 250V 16A illuminated connection male faston 6.3mm ambient temperature max. 100/55°C protection IP40			

1



No.	346978	Ref. No.	316560 3165600	
description	momentary rocker switch mounting measurements 30x22mm black 2CO 250V 16A connection male faston 6.3mm ambient temperature max. 125/55°C protection IP40			
accessories for	346978			
	No.	301036	Ref. No.	—
	protective cover internal size 30x22mm for rocker switch mounting measurementsmm			

push/momentary push switches

ø25mm

1 				
No.	346936	Ref. No.	316824 3168240	
description	momentary push switch mounting ø 25mm green 1NO/indicator light 250V 16A connection male faston 6.3mm ambient temperature max. 85°C protection IP40			

microswitches

lever actuated

1 				
No.	345254	Ref. No.	312103 3121030	
description	microswitch with lever 250V 16A 1CO connection male faston 6.3mm ambient temperature max. 120°C mounting distance 22mm actuating force: 60g lever length 58mm			

pin-plunger actuated

M10

1 				
No.	345032	Ref. No.	3121000 3276	
description	microswitch with plunger thread M10x1 thread L 12mm 250V 16A 1CO connection male faston 6.3mm stroke 7mm mounting distance 22mm L 28mm ambient temperature max. 125°C type SP9603 actuating force: 180g			

M12



1

No.	345350	Ref. No.	3121010
description	microswitch with plunger mounting distance 22mm thread M12x0.75 thread L 16mm 250V 16A 1CO connection male faston 6.3mm stroke 4mm ambient temperature max. 125°C type EF83161.3 actuating force: 66g		
accessories for	345350		
	No.	345351	Ref. No.
	—		
	nut thread M12x0.75 H 1.6mm WS 14 chrome-plated brass Qty 1 pcs		



position switches

SIEMENS

3SE2 series

position switches (complete)

1 				
No.	346935	Ref. No.	316820 3168200	
description	microswitch 1NO/1NC			



cam switches

3 operating positions



1

No.	300086	Ref. No.	316812 3168120
description	cam switch 3 operating positions programme sequence 1-0-2 shaft $\varnothing$ 6x4.6mm connection male faston 10-pole		

rotary switches

TECNOMATIC



1

No.	346034	Ref. No.	316810 3168100
description	rotary switch 2 0-1 sets of contacts 4 type HD12X275R000 600V 12A shaft $\varnothing$ 6x4.6mm shaft L 40mm shaft round connection male faston 6.3mm		



1

No.	300366	Ref. No.	316818 3168180
description	rotary switch 3 0-1-2 sets of contacts 3 type HD12X312AR000 600V 12A shaft $\varnothing$ 5x5mm shaft L 23mm shaft square connection male faston 6.3mm		




1

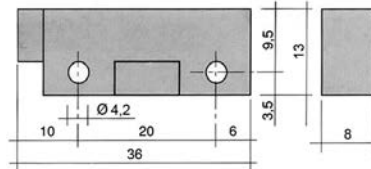
No.	300365	Ref. No.	316819 3168190
description	rotary switch 4 0-1-2-3 sets of contacts 4 type HD12X274R000 600V 12A shaft $\varnothing$ 5x5mm shaft L 22mm shaft square connection male faston 6.3mm		

magnetic switches

36x13mm



1



No.	345792 ¹	Ref. No.	312104 3121040 312106 3121060
description	magnetic switch L 36mm W 13mm 1NO 250V 0.04A P max. 10W connection cable cable length 2500mm mounting distance 20mm		

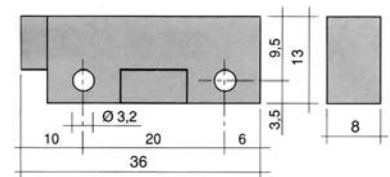
¹with coded connector

accessories

magnets



1



No.	345398	Ref. No.	312105 3121050
description	magnet $\varnothing$ mm L 36mm H 8mm W 13mm hole distance 20mm M3 hole $\varnothing$ 3mm		

lamps

indicator lights

indicator lights 2-piece (lens and indicator lamp)

indicator light lenses

 $\varnothing$ 12mm (type SDY-3)

1

No.	359262	Ref. No.	310906 3109060
description	indicator light housings mounting measurements $\varnothing$ 12mm green round Qty 1 pcs		

indicator lamps for socket type SRZ / SDK / SDY / SFK



1

No.	359132	Ref. No.	3109030 310905 3109050
description	indicator lamp green 250V connection male faston 6.3mm protection IP54 ambient temperature max. 85°C		

timers

programme timers



1

No.	360397	Ref. No.	340609 3406090 (old version)
description	timer BIGATTI engines 2 chambers 5 operation time 60s up to 3min 230V manif. no. LA007 / 3406090 motor type UDS40NE1RK		



1

No.	360687	Ref. No.	3406090
description	timer CDC 4905DV engines 2 chambers 5 operation time 60s up to 3min 230V		



1

No.	360040	Ref. No.	3324 340200 3402000 4188
description	timer CDC 9003F engines 1 chambers 3 operation time 6min 230V shaft ø 6x4.6mm shaft L 21mm manif. no. 9003F3 / PRCIH5 motor type M48R ATS		
For models:	LB925H, LS3-A		
spare parts for	360040		
	No.	360118	Ref. No. —
motor CDC pinion ø 4.9mm teeth 10 230V voltage AC 50/60Hz turn direction right motor ø 47mm H 19.3mm motor type M48R ATS for timer cable length 260mm 1.9/2.5W			

accessories for 360040



No.	110197	Ref. No.	—
knob switch zero mark ø 42mm shaft ø 6x4.6mm shaft flat adjustable black			



1

No.	360395	Ref. No.	3406031
description	timer FIBER P25 engines 1 chambers 4 operation time 180s 230V shaft ø 6x4.6mm shaft L 40mm manif. no. P255J04H5J6 motor type M51BJ0R6400 for devices with mechanical dosing pump edition since year of construction 2000		



1

No.	360120	Ref. No.	3406030
description	timer FIBER P25 engines 1 chambers 5 operation time 180s 230V shaft ø 6x4.6mm shaft L 40mm manif. no. P255J05H542 motor type M51BJ0R6400 for devices with electric dosing pump edition until year of construction 2000		

spare parts for	360120		
	No.	360673	Ref. No. —
motor kit pinion ø 6.8mm teeth 15 230V voltage AC 50/60Hz turn direction clockwise motor ø 48mm H 18.5mm motor type UDS-40NE1RNZ165 cable length 150mm with holder			



1

No.	360398	Ref. No.	3406051
description	timer FIBER P25 engines 2 chambers 7 operation time 12s / 2min 230V shaft ømm shaft Lmm manif. no. P255J07JGJ7 motor type M51BJ0R6400 / M51BJ0L6400		



1

No.	360122	Ref. No.	340605 3406050
description	timer FIBER P25 engines 2 chambers 8 operation time 12s / 2min 230V shaft ømm shaft Lmm manuf. no. P255J08JG75 motor type M51BJ0R6400 / M51BJ0L6400		
spare parts for	360122		
	No.	360673	Ref. No. —
motor kit pinion ø 6.8mm teeth 15 230V voltage AC 50/60Hz turn direction clockwise motor ø 48mm H 18.5mm motor type UDS-40NE1RNZ165 cable length 150mm with holder			
	No.	360674	Ref. No. —
motor kit pinion ø 6.8mm teeth 15 230V voltage AC 50/60Hz turn direction counterclockwise motor ø 48mm H 18.5mm motor type UDS40NE1RNZ165 cable length 150mm with holder			



1

No.	360121	Ref. No.	340604 3406040
description	timer FIBER P25 engines 2 chambers 8 operation time 40s / 120s 230V shaft ømm shaft Lmm manuf. no. P255J08JH76 motor type M51BJ0R6400 / M51BJ0L6400		
spare parts for	360121		
	No.	360673	Ref. No. —
motor kit pinion ø 6.8mm teeth 15 230V voltage AC 50/60Hz turn direction clockwise motor ø 48mm H 18.5mm motor type UDS-40NE1RNZ165 cable length 150mm with holder			
	No.	360674	Ref. No. —
motor kit pinion ø 6.8mm teeth 15 230V voltage AC 50/60Hz turn direction counterclockwise motor ø 48mm H 18.5mm motor type UDS40NE1RNZ165 cable length 150mm with holder			



1

No.	360406	Ref. No.	340400 3404000
description	timer FIBER P26 engines 1 chambers 4 operation time 18min 230V shaft ømm shaft Lmm manuf. no. P265J04J907 motor type M61B40R6400		



1

No.	360396	Ref. No.	340607 3406070
description	timer FIBER P26 engines 1 chambers 5 operation time 18min 230V shaft ømm shaft Lmm manuf. no. P265J05J9017 motor type M61B40L6400		



1

No.	360076	Ref. No.	512069300
description	timer FIBER P37 engines 1 chambers 3 operation time 180s 230V shaft ø 6x4.6mm shaft L 18mm manuf. no. P375J03H524 motor type M51BJ0R6400		

contactors

SIEMENS

power contactors



1

No.	380848	Ref. No.	342623 3426230
description	power contactor resistive load 20A 230VAC (AC3/400V) 8.4A/4kW main contacts 3NO connection screw connection type 3TF30000-0A		
accessories for	380848		
	No.	380849	Ref. No. 342624 3426240
contact block contacts 1NO/1NC			

auxiliary contacts



1

No.	380849	Ref. No.	342624 3426240
description	contact block contacts 1NO/1NC		

overload switches



1

No.	380850	Ref. No.	342625 3426250
description	overload switch setting range 3.2-5A type 3UA50 00-1F		

relays

power relays

with DIN rail mounting

upper



1

No.	380183	Ref. No.	342626 3426260
description	power relays FINDER 230VAC 12A 2CO connection male faston 4.8mm DIN rail manuf. no. 56.32.8.230.0007		
accessories for	380183		
	No.	380476	Ref. No. —
	relay socket dimensions 78x27x33.5mm 250V voltage AC 10A FINDER manuf. no. 96.72		



solenoid valves

solenoid valves (water)

ELBI

straight



1

No.	373021	Ref. No.	330050 3300500
description	solenoid valve double straight 230VAC inlet 3/4" outlet 11.5mm output 1x 4.7l/min DN10 ELBI		
spare parts for	373021		
	No.	370467	Ref. No. —
	solenoid valve filter suitable for ELBI		
	No.	371263	Ref. No. —
	reducer ELBI type EATON (INVENSYS) flow rate 4.7l/min pressure range 0 up to 10bar tolerance ±15/25% grey		



1

No.	373025	Ref. No.	330500 3305000 4165
description	solenoid valve triple straight 230VAC inlet 3/4" outlet 11.5mm DN10 ELBI		
spare parts for	373025		
	No.	370467	Ref. No. —
	solenoid valve filter suitable for ELBI		



spare parts and accessories

reducers

outlet side



1

No.	371260	Ref. No.	330650 3306500
description	reducer type ELBI flow rate 0.5l/min pressure range 0 up to 10bar tolerance ±15/25% red		



TP



1

No.	370015	Ref. No.	330100 3301000 330651 3306510
description	solenoid valve single angled 230VAC inlet 3/4" outlet 11.5mm DN10 TP		
accessories for	370015		
	No. 371220	Ref. No.	—
reducer TP flow rate 3l/min red tolerance $\pm 15\%$			
	No. 371221	Ref. No.	—
reducer TP flow rate 5.5l/min yellow tolerance $\pm 15\%$			
	No. 371222	Ref. No.	—
reducer TP flow rate 6l/min grey tolerance $\pm 15\%$			
	No. 371223	Ref. No.	—
reducer TP flow rate 10l/min white tolerance $\pm 15\%$			
	No. 371224	Ref. No.	—
reducer TP flow rate 12l/min bronze tolerance $\pm 15\%$			
	No. 371225	Ref. No.	—
reducer TP flow rate 16l/min light brown tolerance $\pm 15\%$			
	No. 371226	Ref. No.	—
reducer TP flow rate 20l/min red tolerance $\pm 15\%$			
	No. 371230	Ref. No.	—
reducer TP flow rate 0.25l/min red tolerance $\pm 25\%$			
	No. 371231	Ref. No.	—
reducer TP flow rate 0.35l/min violet tolerance $\pm 25\%$			
	No. 371232	Ref. No.	—
reducer TP flow rate 0.5l/min orange tolerance $\pm 25\%$			
	No. 371233	Ref. No.	—
reducer TP flow rate 0.8l/min white tolerance $\pm 25\%$			
	No. 371234	Ref. No.	—
reducer TP flow rate 1l/min light blue tolerance $\pm 25\%$			
	No. 371235	Ref. No.	—
reducer TP flow rate 1.2l/min brown tolerance $\pm 25\%$			
	No. 371236	Ref. No.	—
reducer TP flow rate 1.5l/min light brown tolerance $\pm 25\%$			
	No. 371237	Ref. No.	—
reducer TP flow rate 2.5l/min yellow tolerance $\pm 25\%$			

accessories for	370015		
	No. 371238	Ref. No.	—
reducer TP flow rate 3.4l/min dark green tolerance $\pm 25\%$			
	No. 371239	Ref. No.	—
reducer TP flow rate 5l/min black tolerance $\pm 25\%$			
	No. 371240	Ref. No.	—
reducer TP flow rate 8l/min blue tolerance $\pm 20\%$			

metal

ASCO

spare parts and accessories

O-rings



1

No.	371095	Ref. No.	2182100
description	O-ring Viton thickness 1.78mm ID $\varnothing$ 6.07mm Qty 1 pcs		

Solenoid valve - accessories



1

No.	371095	Ref. No.	2182100
description	O-ring Viton thickness 1.78mm ID $\varnothing$ 6.07mm Qty 1 pcs		

pressure switches

for warewashing

 $\varnothing$ 58mm with male faston 6.3mm

with connection horizontal



1

No.	541047	Ref. No.	328303 3283030
description	pressure control pressure range 340/200mbar connection 6mm $\varnothing$ 58mm pressure connection horizontal warewashing		

			
1			
No.	541046	Ref. No.	328301 3283010
description	pressure control pressure range 45/20mbar connection 6mm ø 58mm pressure connection horizontal warewashing		

			
1			
No.	541140	Ref. No.	3281100 37610054
description	pressure control pressure range 55/30mbar connection 6mm ø 58mm pressure connection horizontal warewashing		

with connection vertical

			
1			
No.	541520	Ref. No.	328100 3281000 3609
description	pressure control pressure range 55/30mbar connection male faston 6.3mm ø 55mm pressure connection vertical warewashing pressure connection ø 6mm		

miscellaneous

			
1			
No.	541038	Ref. No.	328302 3283020
description	pressure control double		

accessories

			
1			
No.	541109	Ref. No.	260032 2600320
description	Y-piece plastic hose ø 8-6-8mm for pressure switch		

pumps

wash and rinse pumps

FIR

pumps

			
1			
No.	500465	Ref. No.	351890 3518900
description	pump inlet ø 28mm outlet ø 26mm type 2213.1601 230V 50Hz 1 phase 0.11kW 0.15HP L 195mm rotation direction left capacitor 5µF FIR		
spare parts for	500465		
	No.	365017	Ref. No. 334600 3346000
	operating capacitor capacity 5µF 450V tolerance 5% 50/60Hz ambient temperature max. -25 to +85°C ø 28mm L 54mm M8 plastic connection male faston 6.3mm 16.10.08 protection		
	No.	510384	Ref. No. —
pump cover inlet ø 28mm outlet ø 26mm ø 100mm ID ø 76mm			
	No.	510695	Ref. No. —
mechanical shaft seal height counter ring 5.5mm ID ø 11mm			
	No.	511711	Ref. No. —
O-ring EPDM thickness 3.53mm ID ø 78.97mm Qty 1 pcs			
	No.	521266	Ref. No. —
impellor ø 67mm H 18mm thread M7 shaft ø 11mm shaft length 32mm blades 3			



1

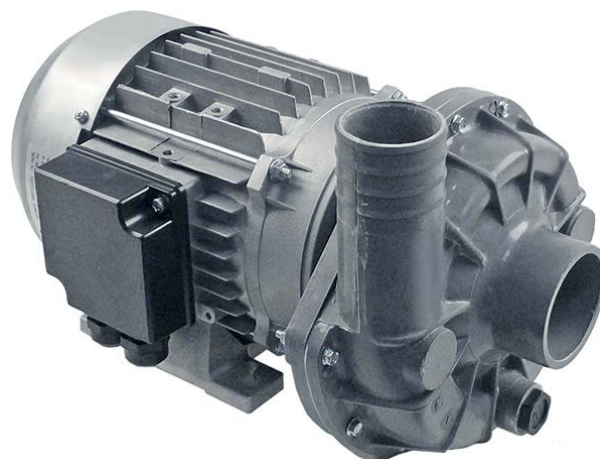
No.	500028	Ref. No.	351890 old version 3518900 old version
description	pump inlet ø 28mm outlet ø 26mm type 2213.1912 230V 50Hz 1 phase 0.11kW 0.15HP L 195mm rotation direction left capacitor 6.3µF FIR		
spare parts for	500028		
	No.	365012	Ref. No. —
operating capacitor capacity 6.3µF 450V tolerance 5% 50Hz ambient temperature max. -25 to +85°C ø 30mm L 61mm M8 plastic connection male faston 6.3mm protection			
	No.	510384	Ref. No. —
pump cover inlet ø 28mm outlet ø 26mm ø 100mm ID ø 76mm			
	No.	510532	Ref. No. —
impellor ø 72mm H 22mm shaft ø 11mm shaft length 32mm blades 3			
	No.	510695	Ref. No. —
mechanical shaft seal height counter ring 5.5mm ID ø 11mm			
	No.	521703	Ref. No. —
pump cover gasket EPDM thickness 2.5mm ID ø 75mm Qty 1 pcs			



1

No.	500479	Ref. No.	351934 3519340
description	pump inlet ø 45mm outlet ø 40mm type 3911.1423 230V 50Hz 1 phase 0.56kW 0.75HP L 204mm rotation direction right capacitor 10µF FIR		
spare parts for	500479		
	No.	365015	Ref. No. —
operating capacitor capacity 10µF 400V tolerance 5%Hz ambient temperature max. -25 to +85°C ø 35.5mm L 59mm M8 plastic connection male faston 6.3mm protection			

spare parts for	500479		
	No.	510508	Ref. No. —
pump cover FIR inlet ø 45mm outlet ø 40mm pump type PU 0.5/3911 turn direction right ø 160mm ID ø 125mm inner height 25mm			
	No.	510610	Ref. No. —
impellor ø 95.5mm H 23mm shaft intake ø 9/8mm rotation direction right seat ø 16mm blades 6			
	No.	510692	Ref. No. —
mechanical shaft seal for shaft ø 11mm slide ringext. ø 24mm slide ring H 13mm counter ring mounting ø 26mm height counter ring 8mm counter ring int. ø 14mm			
	No.	521702	Ref. No. —
pump cover gasket thickness 3.5x4.5mm Qty 1 pcs			



1

No.	500023	Ref. No.	351936 3519360
description	pump inlet ø 63mm outlet ø 47mm type 1225.2725 230/400V 50Hz 3 phase 1.1kW 1.5HP L 335mm rotation direction right FIR		
spare parts for	500023		
	No.	510602	Ref. No. —
impellor ø 110mm H 34mm rotation direction right thread M8L shaft ø 28mm seat ø 12.2mm blades 6			
	No.	510693	Ref. No. —
mechanical shaft seal for shaft ø 12mm slide ringext. ø 24mm slide ring H 15.5mm slide ring int. ø 11mm counter ring mounting ø 24mm height counter ring 8mm counter ring int. ø 13.5mm			
	No.	521513	Ref. No. —
pump cover FIR inlet ø 63mm outlet ø 47mm turn direction right ID ø 150mm inner height 32mm			
	No.	524416	Ref. No. —
pump cover gasket thickness 4x4mm Qty 1 pcs			

booster pumps I

			
1			
No.	500060	Ref. No.	351930 3519300
description	pump inlet ø 1" outlet ø 1" type PQM60 230V 50Hz 1 phase 0.37kW PEDRELLO		
accessories for	500060		
	No.	365015	Ref. No. —
	 operating capacitor capacity 10µF 400V tolerance 5%Hz ambient temperature max. -25 to +85°C ø 35.5mm L 59mm M8 plastic connection male faston 6.3mm protection		

			
1			
No.	500478	Ref. No.	351942 3519420 351948 3519480
description	pump inlet ø 13mm outlet ø 13mm type C.4035 230V 0.28kW ALBA PUMPS (C&A) turn direction left		

drain pumps

ASKOLL

			
1			
No.	500210	Ref. No.	351935 3519350
description	drain pump 230V 40W		

booster pumps II

accessories

			
1			
No.	365017	Ref. No.	334600 3346000
description	operating capacitor capacity 5µF 450V tolerance 5% 50/60Hz ambient temperature max. -25 to +85°C ø 28mm L 54mm M8 plastic connection male faston 6.3mm 16.10.08 protection		

condensators & interference suppression filters

operating capacitors

plastic

			
1			
No.	365017	Ref. No.	334600 3346000
description	operating capacitor capacity 5µF 450V tolerance 5% 50/60Hz ambient temperature max. -25 to +85°C ø 28mm L 54mm M8 plastic connection male faston 6.3mm 16.10.08 protection		

filters

interference suppression filters

			
1			
No.	365044	Ref. No.	334606 3346060
description	interference suppression filter type FC701Y2F 250V 50-60Hz conductor 2 with E connection cable 200mm L 42mm ø 23mm Hmm Wmm plastic Qty 1 pcs		

fuses

screw locks

D0-system (NEOZED)



1

No.	358072	Ref. No.	316823 3168230
description	fuse size D01 6A rated 250/400V E14 ø 11mm L 36mm Qty 10 pcs		

fuse holders



1

No.	358000	Ref. No.	342628 3426280 342629 3426290
description	fuse holder suitable fuse D01 16A rated 400V for DIN rail mounting suitable for D01		

electric accessories

terminals

connection terminals with screw/faston connections



1

No.	550278	Ref. No.	308200 3082000
description	power terminal block 3-pole max. 40A max 400V connection ø6mm ² / F6.3 temp.-resist. 150°C cross section 6mm ²		



1

No.	550411	Ref. No.	308300 3083000
description	power terminal block 6-pole max. 40A max 450V connection ø6mm ² / F6.3 temp.-resist. 150°C cross section 6mm ²		

connection terminals with faston connections



1

No.	550754	Ref. No.	308610 3086100
description	connection terminal 6-pole max. 16A max 380V		

terminal boards



1

No.	550413	Ref. No.	308611 3086110
description	terminal board 3-pole thread M5 L 55mm W 36mm		

equipment-specific units

for espresso machines

brewing units

filter holder gaskets

O-rings



1

No.	510409	Ref. No.	218845 2188450
description	O-ring EPDM thickness 5.34mm ID ø 56.52mm Qty 1 pcs		

for dishwashers

drain and intake components

LASA

drain /intake bodies



1

No.	501356	Ref. No.	2440050 2440051	
description	drain fitting thread 1 1/2" ID ø 35mm L 40mm end piece ext. ø 57mm			
accessories for	501356			
	No.	505180	Ref. No.	—
	O-ring EPDM thickness 3.53mm ID ø 47.22mm Qty 1 pcs			

Table continues overleaf

accessories for 501356				
	No.	506224	Ref. No.	244004
				2440040
				267160
				2671600
nut thread 1½" plastic				



1

No.	507374	Ref. No.	267340 2673400 (old version) 3589		
description drain fitting thread 1¼"					
spare parts for 507374					
	No.	507058	Ref. No.	267120 2671200 3591	
	screw connection thread 1¼" H 14mm WS 55				
		No.	507373	Ref. No.	241430 2414300 3588
		threaded rod L 42mm			

A black, cylindrical drain fitting with a threaded base. A metal bracket is mounted on top, featuring a central vertical pin and two horizontal arms that form a U-shape.

1

No.	507577	Ref. No.	2673400
description	drain fitting thread 1¼" H 87mm		

A black, cylindrical drain fitting with a flared top and a threaded section. The fitting is shown from a top-down perspective, highlighting its circular shape and the internal structure of the top flange. The body of the fitting has a series of horizontal ridges or threads near the base.

1

No.	501374	Ref. No.	6490890
description	drain fitting thread 1½" ID ø 39mm L 40mm hose ø 41mm		

1

No.	511916	Ref. No.	260970 2609700	
description		intake body		
spare parts for		511916		
	No.	511917	Ref. No.	260969 2609690
	intake filter			

			
1			
No.	506224	Ref. No.	244004 2440040 267160 2671600
description		nut thread 1½" plastic	

			
1			
No.	532537	Ref. No.	2188600
description	O-ring EPDM thickness 3.53mm ID ø 113.9mm Qty 1 pcs		

			
1			
No.	507058	Ref. No.	267120 2671200 3591
description screw connection thread 1¼" H 14mm WS 55			

filters			
			
1			
No.	524928	Ref. No.	743176
description	flat filter L 560mm W 270mm H 20mm with hole mounting pos. right for dishwasher SS		

			
1			
No.	524929	Ref. No.	743177
description	flat filter L 560mm W 270mm H 20mm without hole mounting pos. left for dishwasher SS		



1

No.	511917	Ref. No.	260969 2609690
description	intake filter		
spare parts for	511917		
No.	511916	Ref. No.	260970 2609700
description	intake body		



1

No.	507373	Ref. No.	241430 2414300 3588
description	threaded rod L 42mm		

overflow pipes



1

No.	519454	Ref. No.	2609710
description	overflow pipe ø 31mm L 238mm ID ø 27mm ED ø 31mm thickness 3mm		



1

No.	501357	Ref. No.	7451360 7451780
description	overflow pipe ø 40mm L 460mm stainless steel		

softener cartridges

softening columns



1

No.	530000	Ref. No.	346100 3461000 346200 3462000
description	softener 4-fold L 380mm W 180mm		

complete



1

No.	516086	Ref. No.	3464020
description	softener		
spare parts for	516086		
No.	516087	Ref. No.	—
description	container lid		



hood mechanics for dishwashers

springs



1

No.	511968	Ref. No.	238517 2385170
description	spring for hood mechanics L 383mm wire gauge ø 5.5mm ø 43mm		

air traps

air traps



1

No.	510343	Ref. No.	277561 2775610
description	air trap L 140mm ø 33mm plastic		



1

No.	511454	Ref. No.	260968 2609680 2609680+2185600+2023250+2035650 2609680+2187700+2023250+2035650
description	air trap W 45mm H 95mm		

door mechanics

locks



1

No.	510628	Ref. No.	2609880
description catch hook plastic for door latch			



1

No.	510627	Ref. No.	2609870
-----	--------	----------	---------

description housing plastic for door latch

accessories for 510627



No.	510628	Ref. No.	2609880
-----	--------	----------	---------

catch hook plastic for door latch



No.	510629	Ref. No.	2385150
-----	--------	----------	---------

spring for door latch



1

No.	510629	Ref. No.	2385150
-----	--------	----------	---------

description spring for door latch

screw connections



1

No.	507058	Ref. No.	267120 2671200 3591
-----	--------	----------	---------------------------

description screw connection thread 1 1/4" H 14mm WS 55

washing and rinsing systems



1

No.	524932	Ref. No.	266002
description extension for wash arm support ø 68/62mm ID ø 53mm H 60mm			



1

No.	524933	Ref. No.	270302 2703020
description gasket for wash arm support ø 100mm ID ø 68mm thickness 7mm			



1

No.	510238	Ref. No.	230598 2305980
description knurled nut ø 27mm H 13.4mm wash arm support			



1

No.	519469	Ref. No.	260974 2609740
description screw connection for wash arm support mounting pos. lower			

washing and rinsing systems (sorted by producer)

LASA



1

No.	518084	Ref. No.	260983 2609830
description rinse arm L 215mm nozzles 4 mounting ø 18mm mounting pos. upper/lower			



1

No.	518083	Ref. No.	2610010
description wash arm L 190mm nozzles 4 mounting ø 31.7mm mounting pos. upper/lower ø 32mm			



1

No.	510237	Ref. No.	2600130
description rinse jet H 18mm			



1

No.	524931	Ref. No.	261003 2610030
description wash arm boss mounting pos. upper/lower ø 71mm ID ø 59mm L 135mm W 88mm H 62mm			



1

No.	519453	Ref. No.	260973 2609730 644657 6446570				
description wash arm support mounting pos. lower							
accessories for 519453							
 <table> <tr> <th>No.</th><td>519469</td><th>Ref. No.</th><td>260974 2609740</td></tr> </table>				No.	519469	Ref. No.	260974 2609740
No.	519469	Ref. No.	260974 2609740				
screw connection for wash arm support mounting pos. lower							



1

No.	519452	Ref. No.	260976 2609760
description wash arm support mounting pos. upper ø 41mm H 64mm			

knobs

producer-specific knobs

LASA



1

No.	111816	Ref. No.	263500 2635000
description knob ø 20mm shaft ø 6x4.6mm shaft flat universal red			



1

No.	111815	Ref. No.	260016 2600160 644660 6446600 6446600+2004400
description knob switch zero mark ø 45mm shaft ø 6x4.6mm shaft flat right			



1

No.	112550	Ref. No.	260007 2600070 644656 6446560
description knob switch zero mark ø 45mm shaft ø 6x4.6mm shaft flat right black			

accessories

gaskets



1

No.	112563	Ref. No.	270310
description gasket for shaft D1 ø 16mm D2 ø 6mm			

rosettes



1

No.	112551	Ref. No.	260010 2600100
description rosette for knob up to ø 45mm			




1


No.	112552	Ref. No.	260009 2600090
description rosette for knob up to ø 45mm			


gaskets


O-rings


EPDM


1		
		
No.	510302	Ref. No. 218852 2188520
description O-ring EPDM ID ø 12.42mm thickness 1.78mm Qty 1 pcs		


1		
		
No.	504512	Ref. No. 2182550
description O-ring EPDM thickness 1.78mm ID ø 14mm Qty 1 pcs		

1		
		
No.	510303	Ref. No. 218030 2180300
description O-ring EPDM thickness 1.78mm ID ø 6.75mm Qty 1 pcs		


1		
		
No.	532062	Ref. No. 2185700
description O-ring EPDM thickness 2.62mm ID ø 29.82mm Qty 10 pcs		

1		
		
No.	532537	Ref. No. 2188600
description O-ring EPDM thickness 3.53mm ID ø 113.9mm Qty 1 pcs		


1		
		
No.	510408	Ref. No. 218800 2188000 218840 2188400
description O-ring EPDM thickness 5.34mm ID ø 47mm Qty 1 pcs		

1		
		
No.	510409	Ref. No. 218845 2188450
description O-ring EPDM thickness 5.34mm ID ø 56.52mm Qty 1 pcs		


silicone

1		
		
No.	532650	Ref. No. 218560 2185600 218770 2187700
description O-ring silicone thickness 3.53mm ID ø 15.47mm Qty 1 pcs		

Viton

1		
		
No.	371095	Ref. No. 2182100
description O-ring Viton thickness 1.78mm ID ø 6.07mm Qty 1 pcs		

NBR

1		
		
No.	532651	Ref. No. 218130
description O-ring NBR thickness 3.53mm ID ø 71.44mm Qty 1 pcs		

springs

miscellaneous

1		
		
No.	511969	Ref. No. 238512
description protection spring shaft diametermm ø 11mm L 112mm Wmm Hmm wire gauge ø 0.6mm		



manometers



1

No.	541272	Ref. No.	326728 3267280
description	manometer ø 40mm pressure range 0 up to 4bar thread 1/8" connection on the backside		

dosing pumps

membrane dosing pumps

self-priming

various



1

No.	361015	Ref. No.	3489010
description	dosing pump membrane dosing pump rinse aid inlet 6x8mm outlet 4x6mm pressure connection ø 4x6mm suction connection ø 6x8mm		
spare parts for	361015		
	No.	361132	Ref. No. —
membrane dosing pump			
	No.	510298	Ref. No. —
lip valve dosing pump suitable for DB2/DS5			



1

2x

No.	361741	Ref. No.	3489030
description	dosing pump type model 2 rinse aid inlet 4x6mm outlet 4x6mm pressure connection ø 4x6mm suction connection ø 4x6mm		
spare parts for	361741		
	No.	361307	Ref. No. —
membrane dosing pump ø 68mm hole ø 6mm for type DIB3P/DIB5P			
	No.	361459	Ref. No. —
hose connector ø 6mm for dosing pump			
	No.	361462	Ref. No. —
container filter with weight SS hose ø 4x6mm			

spare parts for	361741		
	No.	508116	Ref. No. —
union nut thread M10x1 H 16mm WS 16 plastic Qty 1 pcs			
	No.	508123	Ref. No. —
T-piece 3-way hose ø 13-5-13mm plastic			
	No.	520090	Ref. No. —
PVC hose ID ø 4mm ED ø 6mm L 2m thickness 1mm t.max. 60°C transparent			

self-priming with supporting pressure

OMNIWASH



1

No.	361054	Ref. No.	3229 3929
description	dosing pump rinse aid pressure connection ø 6mm suction connection ø 6mm auxiliary pressure connection 10mm		
spare parts for	361054		
	No.	361308	Ref. No. —
membrane rinse aid pressure connection ømm suction connection ømm auxiliary pressure connectionmm			
	No.	361348	Ref. No. —
lip valve rinse aid pressure connection ømm suction connection ømm auxiliary pressure connectionmm			
accessories for	361054		
	No.	520252	Ref. No. —
nylon hose ID ø 6mm ED ø 8mm L 5m thickness 1mm operating p. 10bar burst p. 50bar t.max. 100°C white			
	No.	520278	Ref. No. —
PVC hose ID ø 6mm ED ø 8mm L 2m thickness 1mm t.max. 60°C transparent			

hoses

formed hoses

straight



1

No.	504273	Ref. No.	193318 1933180 271245 2712450
description	extraction hose hose ext. ø 68mm hose int. ø 60mm L 150mm		



			
1			
No.	519455	Ref. No.	270317 2703170
description	formed hose hose ext. ø 50/60mm hose int. ø 38/48mm L 69mm dishwasher black Qty 1		

with branch

			
1			
No.	524930	Ref. No.	270313 2703130
description	formed hose ext. ø 62/55 D1 ø 43mm D2 ø 49mm L 170mm warewashing black		

for dishwashers

miscellaneous

			
1			
No.	510806	Ref. No.	6422180
description	extraction hose ED ø 8mm ID ø 5mm Qty supplied by meter		

fittings, hose and pipe connectors

hose connectors

without screw connection

			
1			
No.	541109	Ref. No.	260032 2600320
description	Y-piece plastic hose ø 8-6-8mm for pressure switch		

ancillary products

clamps

hose clamps

DIN 3017 - W2

			
1			
No.	520111	Ref. No.	2140960
description	hose clamp ø 10-16mm width 9mm Qty 10 pcs DIN 3017		

fastening material

nuts

hexagonal nuts

DIN 934 / ISO 4032/8673

			
1			
No.	560340	Ref. No.	3231 3676
description	hexagonal nut thread M4 H 3.2mm WS 7 SS DIN/ISO DIN 934 / ISO 4032/8673 Qty 1 pcs		

fasteners

clamps

hose clamps

DIN 3017 - W2

			
1			
No.	520111	Ref. No.	2140960
description	hose clamp ø 10-16mm width 9mm Qty 10 pcs DIN 3017		



consumables

fuses

screw locks

D0-system (NEOZED)



1

No.	358072	Ref. No.	316823 3168230
description	fuse size D01 6A rated 250/400V E14 ø 11mm L 36mm Qty 10 pcs		