

Professionall

Solutii profesionale pentru echipamente profesionale



GAS COMPONENTS



ELECTRIC COMPONENTS



WATER TECHNOLOGY



MECHANICAL COMPONENTS



TOOLS

Spare parts suitable for

MAZZER

thermostats

control and safety thermostats

CAEM

control thermostats



No.	390672	Ref. No.	236042
description	thermostat t.max. 53°C temperature range fixed 53°C 1-pole 1CO 16A probe ø 9.5mm probe L 30mm capillary pipe 600mm capillary pipe isolated 540mm gland nut shaft Lmm screw-in probe probe thread M14x1		
spare parts for	390672		
	No.	510417	Ref. No. —
	flat gasket fibre ED ø 20mm ID ø 14mm thickness 2mm Qty 1 pcs		
	No.	550261	Ref. No. —
	nut thread M14x1 H 4mm WS 19 SS Qty 1 pcs		

switches and momentary switches

push/momentary push switches

30x22mm



No.	301082	Ref. No.	S000INA12 S000INA12/AQQ
description	push switch mounting measurements 30x22mm green 2NO 250V 12A connection male faston 6.3mm ambient temperature max. 85/55°C protection IP54 with protective collar		
For models:	LUX, Macinadosatore-Mini, MINI, MINI-elettronico-mod-A, MINI-elettronico-mod-B		

microswitches

lever actuated



No.	346151	Ref. No.	S00SMIA01 S00SMIA07 S00SMIA07/QQQ S00SMIA09
description	microswitch 1NO connection cable ambient temperature max. 85°C upper actuating force: 12g		
For models:	KONY, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Robur, Macinadosatore-Super-Jolly, MAJOR, MINI, ROBUR, ROYAL, SUPER-JOLLY		

roller-lever actuated

with mounting components



No.	346152	Ref. No.	S00SMIA04 S00SMIA11 S00SMIA11/QQQ
description	microswitch with handle with a switch 250V 16A 1NO connection male faston 6.3mm L 28mm ambient temperature max. 125°C mounting distance 22mm type U83161.3 actuating force: 40g white		
For models:	KONY, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Robur, Macinadosatore-Super-Jolly, MAJOR, MINI, ROBUR, ROYAL, SUPER-JOLLY		

pin-plunger actuated



No.	345326	Ref. No.	S000INR01 S000INR01/QQQ
description	microswitch with plunger 250V 16A 1NO connection male faston 6.3mm ambient temperature max. 85°C mounting distance 22mm type XP52Z11 actuating force: 350g red stroke 15mm		
For models:	KONY, KONY-ELETTRONICO, Macinadosatore-Major, Macinadosatore-Robur, MAJOR, MAJOR-ELETTRONICO, ROBUR, ROBUR-ELETTRONICO, ROYAL, ROYAL-ELETTRONICO		

rotary switches

BREMAS

A1700 series



No.	347085	Ref. No.	S000INA09 S000INA09/BQQ S000INA09/QQQ
description	rotary switch 2 0-1 sets of contacts 2 type CA0170002V 400V 20A shaft ø 5x5mm shaft L 18mm shaft square connection screw		
For models:	KONY-ELETTRONICO, Macinadosatore-Major, Macinadosatore-Super-Jolly, MAJOR, MAJOR-ELETTRONICO, ROBUR-ELETTRONICO, ROYAL-ELETTRONICO, SUPER-JOLLY		



1

No.	346104	Ref. No.	S000INA04 S000INA04/AQQ
description	rotary switch 2 0-1 sets of contacts 3 type CA0170003 400V 20A shaft ø 5x5mm shaft L 21mm shaft square connection screw		
accessories for	346104		
	No.	111012	Ref. No. —
	knob switch zero mark t.max.°C° 34/60mm shaft ø 5x5mm shaft flat black H 22mm L 50mm		



1

No.	346147	Ref. No.	S000INA04
description	rotary switch 20A shaft L 18mm 2 operating positions 3-pole		
For models:	Macinadosatore-Major, Macinadosatore-Super-Jolly, MAJOR, SUPER-JOLLY		



1

No.	347086	Ref. No.	S000INA13 S000INA13/AQQ S000INA13/QQQ
description	rotary switch 3 0-1 momentary switch sets of contacts 3 type CS0178293V 400V 20A shaft ø 5x5mm shaft L 18mm shaft square connection screw		
For models:	KONY, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Robur, Macinadosatore-Super-Jolly, MAJOR, MINI, ROBUR, ROYAL, SUPER-JOLLY		



1

No.	346148	Ref. No.	S000INA10 S000INA10/AQQ
description	rotary switch 3 0-1 momentary switch sets of contacts 4 type CS0178377 400V 20A shaft ø 5x5mm shaft L 18mm shaft square connection screw		
For models:	KONY, Macinadosatore-Major, Macinadosatore-Robur, Macinadosatore-Super-Jolly, MAJOR, ROBUR, ROYAL, SUPER-JOLLY		

encoders and potentiometers



1

No.	402343	Ref. No.	S000POT01 S000POT01/CQQ
description	potentiometer shaft ø 6.3mm shaft L 12mm plug type black cable length 250mm		
For models:	MINI-elettronico-mod-A, MINI-elettronico-mod-B		



1

No.	402339	Ref. No.	S000POT02 S000POT02/AQQ
description	potentiometer shaft ø 6.3mm shaft L 12mm plug type red cable length 250mm		
For models:	MINI-elettronico-mod-A, MINI-elettronico-mod-B		

lamps

indicator lights

indicator lights (complete)

ø10mm

with screw socket



1

No.	359312	Ref. No.	S000LAA06
description	indicator light ø 10mm 230V green		



1

No.	359447	Ref. No.	S000LAA06 S000LAA06/QQQ
description	indicator light ø 10mm 250/400V cable length 400mm		
For models:	KONY, KONY-ELETTRONICO, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Robur, Macinadosatore-Super-Jolly, MAJOR, MAJOR-ELETTRONICO, MINI, ROBUR, ROBUR-ELETTRONICO, ROYAL, ROYAL-ELETTRONICO, SUPER-JOLLY		

timers

mechanical timers

			
1			
No.	350110	Ref. No.	S000TIA02 S000TIA02/AQQ
description	timer M2 2-pole operation time 50s impulse mechanical 2NO at 250V 16A permanent position no shaft ø 3.5 x 3.5mm shaft 3.5 x 3.5mm shaft L 20mm mounting distance 28mm connection rear		
For models:	LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Super-Jolly, MAJOR, MINI, SUPER-JOLLY		

			
1			
No.	360354	Ref. No.	S000TIA03 S000TIA03/AQQ
description	timer M2 3-pole operation time 50s impulse mechanical 3NO at 250V 16A permanent position no shaft ø 3.5 x 3.5mm shaft L 17mm mounting distance 28mm connection rear		
For models:	Macinadosatore-Major, Macinadosatore-Super-Jolly, MAJOR, SUPER-JOLLY		
accessories for	360354		
	No.	110365	Ref. No.
	knob switch zero mark t.max. °C ø 44mm shaft ø 3.5x3.5mm shaft flat black		

contactors

ISKRA (FANAL)

power contactors

			
1			
No.	380212	Ref. No.	S000COC02 S000COC02/QQQ
description	power contactor resistive load 20A 230VAC (AC3/400V) 8.5A/5.5kW main contacts 3NO auxiliary contacts 1NC connection screw connection type Fanal K07M 01 type ISKRA DSL7 01		
For models:	KONY, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Super-Jolly, MAJOR, MINI, SUPER-JOLLY		

			
1			
No.	380413	Ref. No.	S000COC08 S000COC08/QQQ
description	power contactor resistive load 20A 400VAC (AC3/400V) 8.5A/5.5kW main contacts 3NO auxiliary contacts 1NC connection screw connection type Fanal DSL7 01 type ISKRA K07M 01		
For models:	KONY, Macinadosatore-Major, Macinadosatore-Super-Jolly, MAJOR, SUPER-JOLLY		

LOVATO

power contactors

			
1			
No.	380705	Ref. No.	S000COC18 S005COC02 S005COC02/QQQ S005COC18 S005COC18/QQQ
description	power contactor resistive load 20A 230VAC (AC3/400V) 9A/4kW main contacts 3NO auxiliary contacts 1NO connection screw connection type 11BG0910A230		
For models:	KONY, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Super-Jolly, MAJOR, MINI, SUPER-JOLLY		
accessories for	380705		
	No.	380057	Ref. No.
	auxiliary contact contacts 1NO/1NC AC1 10A for contactors BG series connection screw type BGX1011		

			
1			
No.	380710	Ref. No.	S005COC08 S005COC08/QQQ
description	power contactor resistive load 20A 400VAC (AC3/400V) 9A/4kW main contacts 3NO auxiliary contacts 1NO connection screw connection type 11BG0910A400		



1

No.	380896	Ref. No.	S000COC12 S000COC12/AQQ
description	power contactor resistive load 25A 230VAC (AC3/400V) 16A/7.7kW main contacts 3NO auxiliary contacts 1NO connection screw connection type BF1610230		
For models:	Macinadosatore-Robur, ROBUR, ROYAL		



1

No.	380895	Ref. No.	S000COC13 S000COC13/QQQ
description	power contactor resistive load 25A 400VAC (AC3/400V) 16A/7.7kW main contacts 3NO auxiliary contacts 1NO connection screw connection type BF12012205060		
For models:	Macinadosatore-Robur, ROBUR, ROYAL		


electronics

PCBs



1

No.	402349	Ref. No.	S000SCT03 S000SCT03/QQQ
description	display PCB for dosing unit		
For models:	MINI-elettronico-mod-B		



1

No.	402348	Ref. No.	S000SPU03 S000SPU03/AQQ S000SPU03/BQQ S000SPU03/CQQ S000SPU03/DQQ
description	keypad PCB 18V with display		
For models:	KONY-ELETTRONICO, MAJOR-ELETTRONICO, ROBUR-ELETTRONICO, ROYAL-ELETTRONICO		

1

No.	402350	Ref. No.	S000SPU02
description	PCB		
For models:	KONY-ELETTRONICO, MAJOR-ELETTRONICO, ROBUR-ELETTRONICO		




1

No.	402346	Ref. No.	S000SCT06 S000SCT06/AQQ S000SCT06/QQQ
description	PCB L 100mm W 73mm 220/240V 18V		
For models:	KONY-ELETTRONICO, MAJOR-ELETTRONICO, ROBUR-ELETTRONICO, ROYAL-ELETTRONICO		

keypads

keypad units



1

No.	402347	Ref. No.	S000SPU01/AQQ+S000MEM01/AQQ S00SSPU01 S00SSPU01/BQQ
description	keypad unit buttons 3 grey ø 120mm		
For models:	MINI-elettronico-mod-A		

compressors

accessories

starting relays

klixons



1

No.	380901	Ref. No.	S000DIS02 S000DIS02/QQQ
description	start relay 2CR4-170 230V connection F6.3		
For models:	KONY, KONY-ELETTRONICO, Macinadosatore-Robur, ROBUR, ROBUR-ELETTRONICO		

			
1			
No.	380903	Ref. No.	S000DIS07 S000DIS07/QQQ S000DIS13 S000DIS13/QQQ
description	start relay 4CR-1-630 230V connection F6.3		
For models:	KONY, KONY-ELETTRONICO		

			
1			
No.	381120	Ref. No.	S000DIS14 S000DIS14/QQQ
description	start relay 4CR-1-670 230V connection F6.3		

pumps

booster pumps II

accessories

			
1			
No.	365015	Ref. No.	S000COE02 S000COE02/QQQ
description	operating capacitor capacity 10µF 400V tolerance 5%Hz ambient temperature max. -25 to +85°C ø 35.5mm L 59mm M8 plastic connection male faston 6.3mm protection		
For models:	KONY, KONY-ELETTRONICO, SUPER-JOLLY		

			
1			
No.	365012	Ref. No.	S000COE14 S000COE14/QQQ
description	operating capacitor capacity 6.3µF 450V tolerance 5% 50Hz ambient temperature max. -25 to +85°C ø 30mm L 61mm M8 plastic connection male faston 6.3mm protection		
For models:	LUX, Macinadosatore-Mini, MINI		

condensators & interference suppression filters

operating capacitors

plastic

			
1			
No.	365015	Ref. No.	S000COE02 S000COE02/QQQ
description	operating capacitor capacity 10µF 400V tolerance 5%Hz ambient temperature max. -25 to +85°C ø 35.5mm L 59mm M8 plastic connection male faston 6.3mm protection		
For models:	KONY, KONY-ELETTRONICO, SUPER-JOLLY		

			
1			
No.	365014	Ref. No.	S000COE16 S000COE16/QQQ
description	operating capacitor capacity 12.5µF 450V tolerance 5%Hz ambient temperature max. -25 to +85°C ø 35mm L 70mm M8 plastic connection male faston 6.3mm 45S.C3DS.12.5 protection		
For models:	KONY, KONY-ELETTRONICO		

			
1			
No.	365021	Ref. No.	S000COE03 S000COE03/QQQ
description	operating capacitor capacity 16µF 425V tolerance 5% 50/60Hz ambient temperature max. -25 to +85°C ø 35mm L 73mm single M8 plastic connection male faston 6.3mm 416.10.99 protection		
For models:	Macinadosatore-Robur, MAJOR, MAJOR-ELETTRONICO, ROBUR, ROBUR-ELETTRONICO, ROYAL, ROYAL-ELETTRONICO		

			
1			
No.	365019	Ref. No.	S000COE04 S000COE04/QQQ
description	operating capacitor capacity 20µF 400V tolerance 5% 50/60Hz ambient temperature max. -25 to +85°C ø 39.5mm L 70mm M8 plastic connection male faston 6.3mm 16.10.25. protection		
For models:	Macinadosatore-Robur, MAJOR, ROBUR, ROBUR-ELETTRONICO		

			
1			
No.	365012	Ref. No.	S000COE14 S000COE14/QQQ
description	operating capacitor capacity 6.3µF 450V tolerance 5% 50Hz ambient temperature max. -25 to +85°C ø 30mm L 61mm M8 plastic connection male faston 6.3mm protection		
For models:	LUX, Macinadosatore-Mini, MINI		

			
1			
No.	365013	Ref. No.	S000COE01 S000COE01/QQQ
description	operating capacitor capacity 8µF 400V tolerance 5%Hz ambient temperature max. -25 to +85°C ø 31.5mm L 55mm M8 plastic connection male faston 6.3mm protection		
For models:	SUPER-JOLLY		

equipment-specific units

for coffee grinders

grinding burrs

grinding burrs straight

standard

			
1			
No.	527405	Ref. No.	FMA00151B
description	grinding burrs pair		
For models:	Macinadosatore-Major, MAJOR, ROYAL, ROYAL-ELETTRONICO		

			
1			
No.	527914	Ref. No.	FMA00182D FMA00182D/QQQ
description	grinding burrs pair turn direction right D1 ø 58mm ID ø 33mm H 8.5mm tooth spacing 3mm hole ø 5mm bore ø 8mm mounting ø 44		
For models:	Macinadosatore-Mini, MINI		


			
1			
No.	526716	Ref. No.	FMA00195D FMA00195D/AQQ FMA00195D/QQQ
description	grinding burrs pair turn direction right D1 ø 61mm ID ø 35mm H 8.4mm tooth spacing 3mm hole ø 5mm bore ø 9mm mounting ø 45		
For models:	LUX		

			
1			
No.	527231	Ref. No.	FMA00033M FMA00189D FMA0033M
description	grinding burrs pair turn direction right D1 ø 64mm ID ø 37mm H 8.4mm tooth spacing 3mm hole ø 5.5mm bore ø 9mm mounting ø 49 straight suitable for GAGGIA, ARISTARCO, MAZZER, MACDOBAR		
For models:	Macinadosatore-Super-Jolly, MINI-elettronico-mod-A, MINI-elettronico-mod-B, SUPER-JOLLY		

			
1			
No.	531122	Ref. No.	FMA00151C FMA00151C/QQQ
description	grinding burrs pair turn direction right D1 ø 83mm ID ø 49mm H 9.6mm tooth spacing 3.5mm hole ø 6mm bore ø 10mm mounting ø 76 three-phase suitable for MAZZER		
For models:	MAJOR, ROYAL		

			
1			
No.	527232	Ref. No.	FMA00151A FMA00151A/QQQ FMA00151B
description	grinding burrs pair turn direction right D1 ø 83mm ID ø 49mm H 9.6mm tooth spacing 3mm hole ø 6mm bore ø 10mm mounting ø 65 straight suitable for MAZZER (Major)		
For models:	Macinadosatore-Major, MAJOR, MAJOR-ELETTRONICO		

grinding burrs conical



No.	527915	Ref. No.	FMA00191C FMA00191C/CQQ
description	grinding burrs pair turn direction right D1 ø 63mm D2 ø 40mm H 23mm shaft ø 12mm with flute suitable for MAZZER		
For models:	KONY, KONY-ELETTRONICO		



No.	527383	Ref. No.	FMA00186C FMA00186C/CQQ
description	grinding burrs pair turn direction right D1 ø 71mm D2 ø 49mm H 25mm shaft ø 14mm with flute		
For models:	Macinadosatore-Robur, ROBUR, ROBUR-ELETTRONICO		



No.	527382	Ref. No.	FMA00187C FMA00187C/CQQ
description	grinding burrs pair turn direction right D1 ø 83mm D2 ø 58.3mm H 25mm shaft ø 14mm with flute		
For models:	Macinadosatore-Robur, ROBUR		



No.	525300	Ref. No.	FMA00187C FMA00187C/CQQ
description	grinding burrs pair turn direction right D1 ø 83mm D2 ø 58.3mm H 25mm shaft ø 14mm with flute MAZZER		

grinding burrs holders



No.	527908	Ref. No.	SSJ0POA03 SSJ0POA03/AQQ SSJ0POA03/BQQ
description	grinding burr holder D1 ø 65.5mm D2 ø 55mm H 54mm mounting pos. upper suitable for JOLLY		
For models:	SUPER-JOLLY		



No.	527907	Ref. No.	SRL0POA06 SRL0POA06/AQQ
description	grinding burr holder D1 ø 70mm H 44mm mounting pos. upper suitable for ROYAL-STARK-MAJOR		
For models:	MAJOR, MAJOR-ELETTRONICO, ROYAL, ROYAL-ELETTRONICO		



No.	527262	Ref. No.	SSJ0POA04 SSJ0POA04/QQQ
description	grinding burr holder type JOLLY suitable for MAZZER		
For models:	MINI-elettronico-mod-A, MINI-elettronico-mod-B, SUPER-JOLLY		



No.	527263	Ref. No.	SMJ0POA07 SMJ0POA07/QQQ
description	grinding burr holder type MAJOR suitable for MAZZER		
For models:	MAJOR, MAJOR-ELETTRONICO, ROYAL, ROYAL-ELETTRONICO		

spillage trays



No.	527390	Ref. No.	SMJ0PIB02 SMJ0PIB02/AQQ SSJ0PIB02 SSJ0PIB02/QQQ
description	drain tray		
For models:	Macinadosatore-Robur, ROBUR, ROBUR-ELETTRONICO, ROYAL, ROYAL-ELETTRONICO		



1

No.	526717	Ref. No.	SMI0PIB02 SMI0PIB02/QQQ
description	drain tray L 187mm W 160mm		
For models:	LUX, Macinadosatore-Mini, MINI, MINI-elettronico-mod-A, MINI-elettronico-mod-B		



1

No.	527901	Ref. No.	SSJ0PIB02 SSJ0PIB02/QQQ
description	drain tray L 240mm W 220mm suitable for JOLLY-MAJOR-KONY		
For models:	KONY, KONY-ELETTRONICO, Macinadosatore-Major, Macinadosatore-Super-Jolly, MAJOR, MAJOR-ELETTRONICO, SUPER-JOLLY		

dosing containers

dosing containers (complete)



1

No.	527509	Ref. No.	SSJSGRL03 SSJSGRL03/QAQ SSJSGRL04
description	dosing unit automatic ø 120mm H 160mm suitable for JOLLY		
For models:	KONY, Macinadosatore-Super-Jolly, SUPER-JOLLY		



1

No.	527388	Ref. No.	SMJSGRL04 SMJSGRL04/QAQ SMJSGRL05
description	dosing unit automatic ø 120mm H 190mm suitable for MAJOR		
For models:	Macinadosatore-Major, Macinadosatore-Robur, MAJOR, ROBUR, ROYAL		



1


No.	527900	Ref. No.	SMISGRA04 SMISGRA04/BQQ SMISGRL03
description	dosing unit complete automatic ø 122mm H 140mm suitable for MINI		
For models:	LUX, Macinadosatore-Mini, MINI		



dosing container lids




adjusting screws

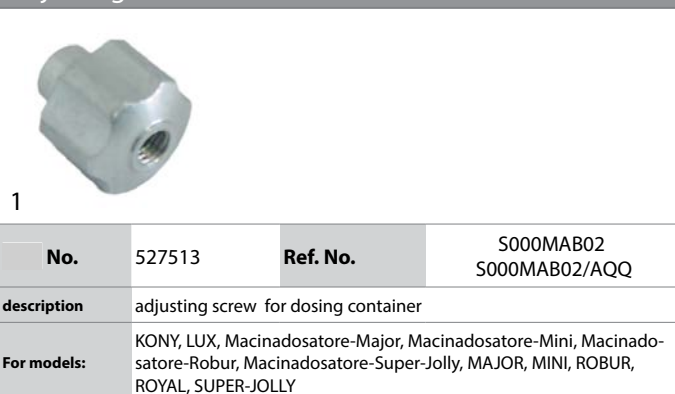

springs

group 1

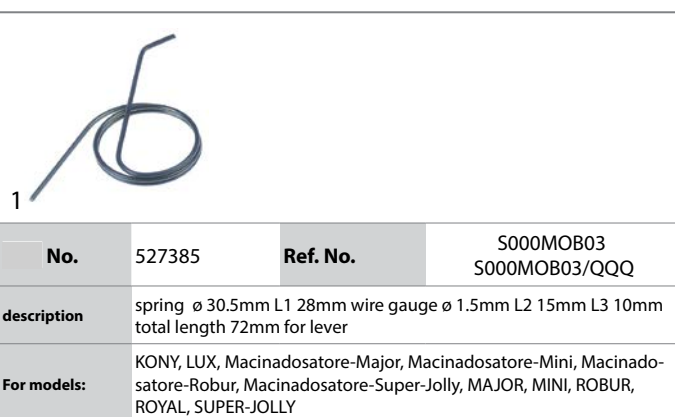

glass cylinders



No.	527909	Ref. No.	S000CIA02 S000CIA02/QQQ
description	cylinder ø 120mm H 68mm plexiglas		
For models:	LUX, Macinadosatore-Mini, MINI		



No.	527910	Ref. No.	S000CIA03 S000CIA03/QQQ
description	cylinder ø 120mm H 90mm plexiglas		
For models:	Macinadosatore-Major, Macinadosatore-Robur, MAJOR, ROBUR, ROYAL		



No.	527332	Ref. No.	S000CIA01 S000CIA01/QQQ
description	glass cylinder for dosing container		
For models:	KONY, Macinadosatore-Super-Jolly, SUPER-JOLLY		

levers

levers



No.	527916	Ref. No.	702332 S00SLEA02 S00SLEA02/QQQ
description	lever for dosing container L 105mm steel		
For models:	KONY, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Robur, Macinadosatore-Super-Jolly, MAJOR, MINI, ROBUR, ROYAL, SUPER-JOLLY		

coffee presses

coffee presses



No.	527521	Ref. No.	S000PRA01 S000PRA02 S000PRA02/QAQ
description	coffee press ø 53mm H 40mm plastic		
For models:	KONY, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Robur, Macinadosatore-Super-Jolly, MAJOR, MINI, ROBUR, ROYAL, SUPER-JOLLY		



No.	527398	Ref. No.	S000PRA02 S000PRA02/QQQ
description	coffee press ø 54.5mm H 42mm plastic		

return spring



No.	527387	Ref. No.	S00SFOA01
description	bearing		



No.	527917	Ref. No.	S00SFOA01 S00SFOA01/QQQ S00SFOA03/QQQ
description	cover plate with lever mounting pos. lower ø 119mm aluminium for dosing container		
For models:	KONY, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Robur, Macinadosatore-Super-Jolly, MAJOR, MINI, ROBUR, ROYAL, SUPER-JOLLY		

sector plates



1

No.	527515	Ref. No.	S000SEA01 S000SEA01/QQQ
description	sector plates		
For models:	KONY, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Robur, Macinadosatore-Super-Jolly, MAJOR, MINI, ROBUR, ROYAL, SUPER-JOLLY		

miscellaneous



1

No.	531126	Ref. No.	S00SGUA01/AQQ
description	grid with gasket for dosing container suitable for MAZZER for model Mini Electronic countries Europe		

ratches

ratches



1

No.	527905	Ref. No.	S000NAA01 S000NAA01/AQQ
description	ratchet int. ø 1 7mm total length 23mm		
For models:	KONY, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Robur, Macinadosatore-Super-Jolly, MAJOR, MINI, ROBUR, ROYAL, SUPER-JOLLY		

stars

centrical



1

No.	527516	Ref. No.	S000STA03 S000STA03/BQQ
description	star mounting pos. centre ø 109mm hole ø 10mm H 15mm		
For models:	KONY, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Robur, Macinadosatore-Super-Jolly, MAJOR, MINI, ROBUR, ROYAL, SUPER-JOLLY		



1


No.	527913	Ref. No.	S005GRA08 S005GRA08/AQQ
description	star mounting pos. centre ø 109mm hole ø 10mm H 24mm with handle		
For models:	KONY, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Robur, Macinadosatore-Super-Jolly, MAJOR, MINI, ROBUR, ROYAL, SUPER-JOLLY		

upper



1

No.	527912	Ref. No.	SMISSTA04 SMISSTA04/QQQ
description	star mounting pos. upper ø 108mm hole ø 12mm H 52mm thread M3		
For models:	LUX, Macinadosatore-Mini, MINI		



1

No.	526589	Ref. No.	SMJSSTA04 SMJSSTA04/QQQ
description	star mounting pos. upper ø 108mm hole ø 12mm H 94mm thread M3		
For models:	Macinadosatore-Major, Macinadosatore-Robur, MAJOR, ROBUR, ROYAL		



1

No.	527514	Ref. No.	SSJSSTA04 SSJSSTA04/QQQ
description	star mounting pos. upper ø 109mm hole ø 12mm H 73mm thread M3		
For models:	KONY, Macinadosatore-Super-Jolly, SUPER-JOLLY		

bottom



1

No.	527519	Ref. No.	S000STA02 S000STA02/BQQ
description	star mounting pos. lower		
For models:	KONY, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Robur, Macinadosatore-Super-Jolly, MAJOR, MINI, ROBUR, ROYAL, SUPER-JOLLY		

adjustment mechanism

setting rings



1

No.	527911	Ref. No.	SSJ0GHA02 SSJ0GHA02/QQQ
description	setting ring ø 105mm ID ø 66mm H 21mm thread M7x1.5 suitable for JOLLY-KONY-MINI		
For models:	KONY, KONY-ELETTRONICO, LUX, Macinadosatore-Mini, Macinadosatore-Super-Jolly, MINI, MINI-elettronico-mod-A, MINI-elettronico-mod-B, SUPER-JOLLY		



1

No.	528477	Ref. No.	SMJ0GHA04 SMJ0GHA04/AQQ SRO0GHA01/QQQ
description	setting ring ø 126mm ID ø 70mm H 21mm thread M9x1.5 suitable for MAJOR		
For models:	Macinadosatore-Major, Macinadosatore-Robur, MAJOR, MAJOR-ELETTRONICO, ROBUR, ROBUR-ELETTRONICO, ROYAL, ROYAL-ELETTRONICO		

springs



1

No.	527389	Ref. No.	S000MOB14/AQQ SSJ0MOB01 SSJ0MOB01/AQQ
description	compression spring ø 10mm L 23mm wire gauge ø 1.5mm		
For models:	KONY, KONY-ELETTRONICO, LUX, Macinadosatore-Mini, MAJOR, MAJOR-ELETTRONICO, MINI, MINI-elettronico-mod-A, MINI-elettronico-mod-B, ROYAL, ROYAL-ELETTRONICO, SUPER-JOLLY		

screw connections



1

No.	527898	Ref. No.	S00SPEA00/QQQ SSJSPEA04 SSJSPEA04/AQQ
description	thread bolt ø 10.5mm thread M5 L 25mm		
For models:	KONY, KONY-ELETTRONICO, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Robur, Macinadosatore-Super-Jolly, MAJOR, MAJOR-ELETTRONICO, MINI, MINI-elettronico-mod-A, MINI-elettronico-mod-B, ROBUR, ROBUR-ELETTRONICO, ROYAL, ROYAL-ELETTRONICO, SUPER-JOLLY		

coffee powder dispenser

springs



1

No.	527384	Ref. No.	S000MOB09 S000MOB09/QQQ
description	tension spring		
For models:	MAJOR, SUPER-JOLLY		

coffee beans containers

container lids



1

No.	527386	Ref. No.	SMI0C0D01
description	lid for coffee beans container		



1

No.	527897	Ref. No.	SMI0C0D01 SMI0C0D01/QQQ
description	lid for coffee beans container ø 157mm suitable for MINI		
For models:	Macinadosatore-Mini, MINI, MINI-elettronico-mod-A, MINI-elettronico-mod-B		



1

No.	527327	Ref. No.	S000C0D01 S000C0D01/AQQ S000C0D01/QQQ
description	lid for coffee beans container ø 210mm		
For models:	KONY, KONY-ELETTRONICO, LUX, Macinadosatore-Robur, MAJOR, MAJOR-ELETTRONICO, ROBUR, ROBUR-ELETTRONICO, ROYAL, ROYAL-ELETTRONICO, SUPER-JOLLY		

coffee beans containers

glass cylinders



1

No.	527332	Ref. No.	S000CIA01 S000CIA01/QQQ
description	glass cylinder for dosing container		
For models:	KONY, Macinadosatore-Super-Jolly, SUPER-JOLLY		

supports



1

No.	531166	Ref. No.	N/A
description	support for coffee beans container intake conical seat ø 57-60mm suitable for MAZZER		

locks



1

No.	527329	Ref. No.	S000BOB05+S000SEB01
description	catch for coffee beans container H 57.5mm int. ø 1 47.5mm int. ø 2 49.8mm		



1

No.	527903	Ref. No.	SMIOSEB01 SMIOSEB01/AQQ
description	catch L 82mm W 47mm thickness 1.8mm plastic		
For models:	LUX, Macinadosatore-Mini, Macinadosatore-Super-Jolly, MINI, MINI-elettronico-mod-A, MINI-elettronico-mod-B, SUPER-JOLLY		



1

No.	527902	Ref. No.	S000SEB02 S000SEB02/AQQ
description	catch L 88mm W 54mm thickness 2.5mm plastic		
For models:	KONY, KONY-ELETTRONICO, Macinadosatore-Major, Macinadosatore-Robur, MAJOR, MAJOR-ELETTRONICO, ROBUR, ROBUR-ELETTRONICO, ROYAL, ROYAL-ELETTRONICO		

support for filter holder



1

No.	527520	Ref. No.	S000FOB02 S000FOB02/BQQ S000FOB02/CQQ
description	bracket for filter holder		
For models:	KONY, LUX, Macinadosatore-Mini, Macinadosatore-Robur, MAJOR, MINI, ROBUR, ROYAL, SUPER-JOLLY		

counters

counters



1

No.	527399	Ref. No.	S005COB02 S005COB02/QQQ
description	counter for dosing unit		
For models:	KONY, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Robur, Macinadosatore-Super-Jolly, MAJOR, MINI, ROBUR, ROYAL, SUPER-JOLLY		

knobs

producer-specific knobs

MAZZER



1

No.	111175	Ref. No.	S000MAB01/QQQ
description	knob switch zero mark ø 42mm shaft ø 4x4mm black		



equipment feet and end caps

bolting feet



1

No.	527906	Ref. No.	S00SPIA01 S00SPIA01/QQQ
description	equipment foot ø 22mm H 16mm bore ø 5mm Qty 1 pcs		
For models:	KONY, KONY-ELETTRONICO, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Super-Jolly, MAJOR, MAJOR-ELETTRONICO, MINI, MINI-elettronico-mod-A, MINI-elettronico-mod-B, SUPER-JOLLY		

springs

torsion springs



1

No.	527384	Ref. No.	S000MOB09 S000MOB09/QQQ
description	tension spring		
For models:	MAJOR, SUPER-JOLLY		

compression springs



1

No.	527389	Ref. No.	S000MOB14/AQQ SSJ0MOB01 SSJ0MOB01/AQQ
description	compression spring ø 10mm L 23mm wire gauge ø 1.5mm		
For models:	KONY, KONY-ELETTRONICO, LUX, Macinadosatore-Mini, MAJOR, MAJOR-ELETTRONICO, MINI, MINI-elettronico-mod-A, MINI-elettronico-mod-B, ROYAL, ROYAL-ELETTRONICO, SUPER-JOLLY		



1

No.	527517	Ref. No.	S000MOB05 S000MOB05/QQQ
description	compression spring ø 14.8mm L 49mm wire gauge ø 1.3mm		
For models:	KONY, LUX, Macinadosatore-Major, Macinadosatore-Mini, Macinadosatore-Robur, Macinadosatore-Super-Jolly, MAJOR, MINI, ROBUR, ROYAL, SUPER-JOLLY		