

Professionale pentru echipamente profesionale





heating elements


immersion heating elements

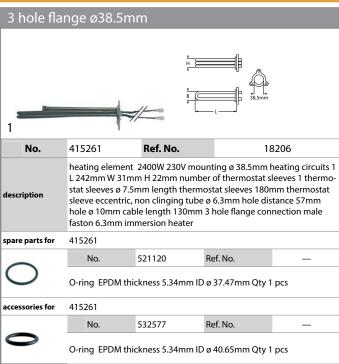







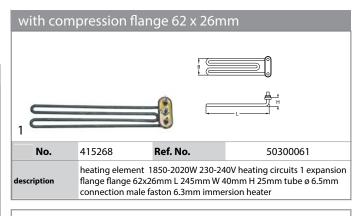



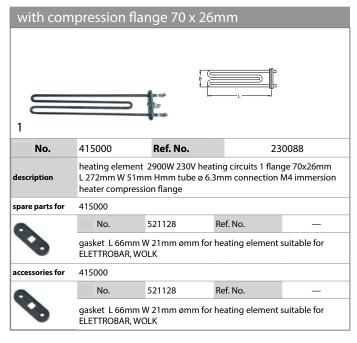

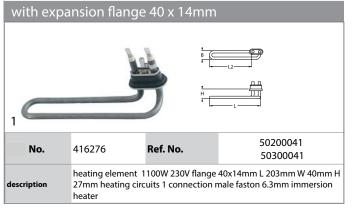







1					
No.	415269	Ref. No.			00037 00056
description	heating element 2700W 230V heating circuits 3 mounting ø 47.5mm L 257mm W 28mm H 45mm round flange connection male faston 6.3mm immersion heater tube ø 6.3mm H1 11mm H2 34mm connec- tion length 28mm				
accessories for	415269				
	No.	510408	Ref. N	lo.	50700046
\bigcirc	O-ring EPDM thickness 5.34mm ID ø 47mm Qty 1 pcs				S
	No.	510562	Ref. N	lo.	_
O	O-ring silicone thickness 5.34mm ID ø 47mm Qty 1 pcs				
400	No.	520235	Ref. N	lo.	_
	3 hole flange hole distance 70.5mm perforation ø 6.5mm ID ø 53.5mm				
	No.	520236	Ref. N	lo.	_
flange for heating element ID ø 50mm ED ø 90mm hole ø 6.5mm holes				ole ø 6.5mm 3	
	No.	550002	Ref. N	lo.	_
13	tension strap H 10mm L 21mm W 10mm hole Ø 6.5mm for heating element				
	No.	550362	Ref. N	lo.	_
	blind flange ø 64mm mounting ø 47.5mm				

1					
No.	415262	Ref. No.		503	00036
description	heating element 3000W 230V heating circuits 3 mounting ø 47.5mm L 260mm W 40mm H 36mm round flange connection male faston 6.3mm immersion heater tube ø 6.3mm thermostat sleeves ø 7mm number of thermostat sleeves 1 length thermostat sleeves 250mm thermostat sleeve upper centre not clinging				
accessories for	415262				
	No.	510408	Ref	. No.	50700046
\bigcirc	O-ring EPDM t	O-ring EPDM thickness 5.34mm ID ø 47mm Qty 1 pcs			
	No.	510562	Ref	. No.	_
O	O-ring silicone thickness 5.34mm ID ø 47mm Qty 1 pcs				
670	No.	520235	Ref	. No.	_
	3 hole flange hole distance 70.5mm perforation ø 6.5mm ID ø 53.5mm				
	No.	520236	Ref	. No.	_
	flange for heating element ID ø 50mm ED ø 90mm hole ø 6.5mm 3 holes				
	No.	550002	Ref	. No.	_
13	tension strap H 10mm L 21mm W 10mm hole ø 6.5mm for heating element				
	No.	550362	Ref	. No.	_
	blind flange ø	64mm mountir	ng ø 47.5	mm	









	240mm thermostat sleeve eccentric, non clinging				
1					
No.	416278	Ref. No.	150	089/A	
description	heating element 6000W 230V heating circuits 3 mounting ø 47.5mm L 435mm W 38mm H 38mm round flange connection male faston 6.3mm immersion heater tube ø 6.3mm thermostat sleeves ø 7mm number of thermostat sleeves 1 length thermostat sleeves 236mm thermostat sleeve eccentric, non clinging				
accessories for	416278				
	No.	510408	Ref. No.	50700046	
\bigcirc	O-ring EPDM thickness 5.34mm ID ø 47mm Qty 1 pcs				
	No.	510562	Ref. No.	_	
O	O-ring silicone thickness 5.34mm ID ø 47mm Qty 1 pcs				
400	No.	520235	Ref. No.	_	
	3 hole flange hole distance 70.5mm perforation ø 6.5mm ID ø 53.5mm				
	No.	520236	Ref. No.	_	
O	flange for heating element ID ø 50mm ED ø 90mm hole ø 6.5mm 3 holes				
	No.	550002	Ref. No.	_	
3	tension strap H 10mm L 21mm W 10mm hole ø 6.5mm for heating element				
	No.	550362	Ref. No.	_	
	blind flange ø 64	lmm mounting ø	47.5mm		

with roun	d flange ø5	/.5mm		
1		-a		
No.	416279	Ref. No.	3000	1011/A
description	heating element 12000W 230V heating circuits 3 mounting ø 57.5mm L 470mm W 48mm H 34mm round flange connection M5 immersion heater tube ø 8.5mm connection length 30mm thermostat sleeves ø 7mm number of thermostat sleeves 1 length thermostat sleeves 295mm thermostat sleeve eccentric, non clinging			
accessories for	416279			
	No.	550002	Ref. No.	_
1	tension strap H 1 element	0mm L 21mm W	10mm hole ø 6.5n	nm for heating

1	4				
No.	415264	Ref. No.	503	00042	
description	heating element 6000W 230V heating circuits 3 mounting Ø 57.5mm L 480mm W 33mm H 42mm round flange connection M5 immersion heater tube Ø 8.5mm connection length 19mm thermostat sleeves Ø 7.5mm number of thermostat sleeves 1 length thermostat sleeves 268mm thermostat sleeve not clinging				
spare parts for	415264				
	No.	510409	Ref. No.	50700015 50700016	
	O-ring EPDM thi	O-ring EPDM thickness 5.34mm ID ø 56.5			

accessories for	415264			
	No.	550002	Ref. No.	_
3	tension strap H element	10mm L 21mm W	10mm hole ø 6.5n	nm for heating





thermostats

bi-metal thermostats

safety bi-metal thermostats



No.	390480	Ref. No.	51010001
description	bi-metal safety the 105°C 1NC 1-pole		nce 23.8mm switch-off temp. 3 2 hole fixing



electric component

control and safety thermostats

EGO

safety thermostats

55.32 series



No.	390244	Ref. No.	5315797
description	,	oillary pipe 540mm	20°C 3-pole 20A probe ø 6mm capillary pipe isolated 500mm

IMIT / TEMPOMATIC / ARTHERMO


control thermostats





No.	390421	Ref. No.	929107
description	probe ø 6.5mm pr	obe L 95mm capilla gland nut shaft øm	range 0-90°C 1-pole 1CO 16A rry pipe 1500mm capillary pipe m shaft Lmm shaft position




No.	390310	Ref. No.	23	6042
description	thermostat t.max. 85°C temperature range fixed 55°C 1-pole 1CO 16A probe ø 9.5mm probe L 37mm capillary pipe 600mm capillary pipe isolated 540mm gland nut shaft ømm shaft Lmm shaft position rotation° screw-in probe probe thread 3/8″ probe material SS			
accessories for	390310			
	No.	506024	Ref. No.	_
0	nut thread 3/8" H 6mm SS WS 22 Qty 1 pcs			
	No.	529349	Ref. No.	_
O	flat gasket FIBER ED ø 22mm ID ø 16.5mm thickness 2mm for thread 3/8" Qty 1 pcs			

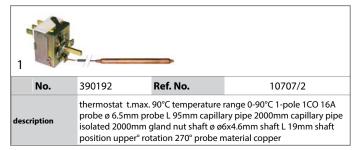







switches and momentary switches

microswitches

lever actuated



No.	345257	Ref. No.	50900015
description	L 29mm L1 33mm	ambient temperati	o connection male faston 6.3mm ure max. 120°C mounting lever length 31.5mm



roller actuated roller 90° No. 347096 Ref. No. 50900025 microswitch with roller plunger 250V 20A 1CO connection screw L1 49mm ambient temperature max. 125°C thread L 14-5mm


thread M12x1 mounting distance 25mm actuating force: 370g type


system switches (ROLD)

Z15G1318



No.	345721	Ref. No.	50900039
description	hlank can holder		





rotary switches

BREMAS

A1200 series



No.	345909	Ref. No.	50900160
description	rotary switch		


producer-specific rotary switches


DIHR / KROMO




No.	345911	Ref. No.	50900163

description element holder blue-grey format round 0-3









magnetic switches

40x13mm







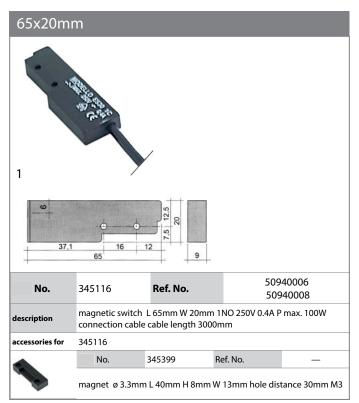

lamps


indicator lights

indicator lights 2-piece (lens and indicator lamp)

indicator lamps for socket type SRZ / SDK / SDY / SFK




No.	359132	Ref. No.	50905012 50905027
description	indicator lamp gre on IP54 ambient te		on male faston 6.3mm protecti- 5°C



Ref. No.

indicator light ø 10mm green 230V connection male faston 6.3mm

50905011





description

No.

ø10mm

with plug-in socket

programme timers

359139

Qty 1 pcs



control equipment

No. 345988 Ref. No. 3002054 description contact block ERSCE C10B 1NO max 230V 10A green







No.	360290	Ref. No.	509	50930010		
description	timer CDC 11804F engines 1 chambers 4 operation time 120s 230V shaft ømm shaft Lmm manuf. no. 11804F1 / 10708T motor type M48R ATS connection F4.8					
spare parts for	360290	360290				
	No. 360118 Ref. No. —					
63	motor CDC pinio	on ø 4.9mm teeth	10 230V voltage A	C 50/60Hz turn		

timer cable length 260mm 1.9/2.5W


direction right motor ø 47mm H 19.3mm motor type M48R ATS for

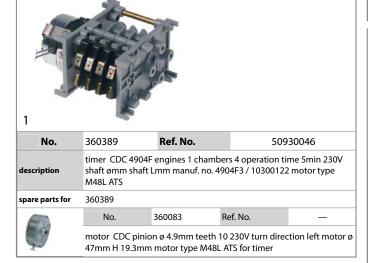







37mm motor type M37LN for timer









contactors

GENERAL ELECTRIC (AEG)



ISKRA (FANAL)



LOVATO

power contactors



No.	381102	Ref. No.	50910113
description			4VAC (AC3/400V) 9A/4kW main ection screw connection type

relays

power relays

with bracket mounting



No.	380139	Ref. No.	50910005 50910040
description			O connection F6.3 bracket nm manuf. no. 62.82.8.230.0000

probes

producer-specific probes


No. 378248 Ref. No. 51020003 temperature probe NTC 10kOhm cable PVC probe -40 up to +110°C cable -10 up to 100°C connection coded plug thread probe ø6x14mm cable length 2m



electronics

PCBs












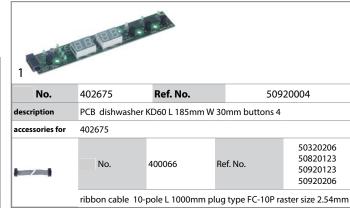




central units









keypads

front foils









solenoid valves

solenoid valves (water)

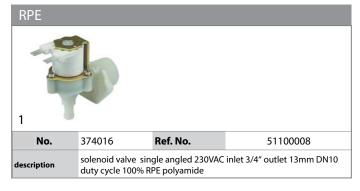

solenoid valves with reducers					
2-fold					
1	5				
No.	370742	Ref. No.	51100024		
description		min t.max. 60°C RPE plas	C inlet 3/4" outlet 11.5mm stic flow regulating valve inlet		

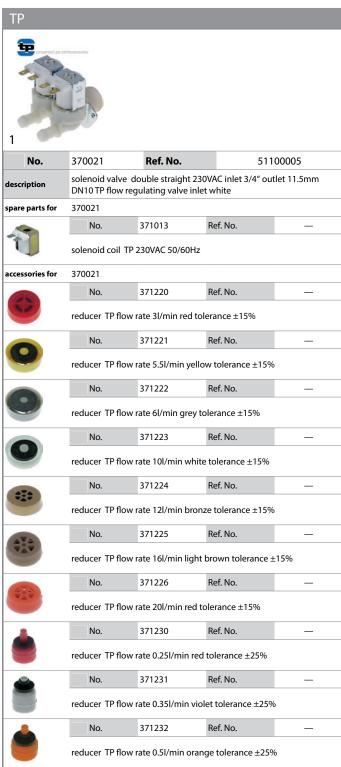




accessories for	370021				
-8-	No.	371233	Ref. No.	_	
	reducer TP flow	rate 0.8l/min white	e tolerance ±25%		
	No.	371234	Ref. No.	_	
	reducer TP flow	rate 1l/min light b	lue tolerance ±25	%	
-	No.	371235	Ref. No.	_	
	reducer TP flow	rate 1.2l/min brow	n tolerance ±25%	•	
-	No.	371236	Ref. No.	_	
	reducer TP flow rate 1.5I/min light brown tolerance ±25%				
2	No.	371237	Ref. No.	_	
	reducer TP flow rate 2.5l/min yellow tolerance $\pm 25\%$				
-	No.	371238	Ref. No.	51100007	
	reducer TP flow rate 3.4l/min dark green tolerance ±25%				
	No.	371239	Ref. No.	_	
	reducer TP flow	rate 5l/min black t	colerance ±25%		
	No.	371240	Ref. No.	_	
	reducer TP flow rate 8I/min blue tolerance ±20%				



1	-51 -51				
No.	370017	Ref. No.		511	00004
description	solenoid valve TP p max 10b	e single straight 23 ar	30VAC	inlet 3/4" outl	et 11.5mm DN10
spare parts for	370017				
	No.	371013	Re	f. No.	_
U	solenoid coil	TP 230VAC 50/60H	z		
accessories for	370017				
	No.	371220	Re	f. No.	_
	reducer TP flo	ow rate 3l/min red	tolera	nce ±15%	
	No.	371221	Re	f. No.	_
	reducer TP flo	ow rate 5.5l/min ye	llow t	olerance ±15%)
	No.	371222	Re	f. No.	_
	reducer TP flow rate 6I/min grey tolerance ±15%				
	No.	371223	Re	f. No.	_
	reducer TP flow rate 10I/min white tolerance ±15%				
474	No.	371224	Re	f. No.	_
*27	reducer TP flow rate 12l/min bronze tolerance ±15%				
AVA	No.	371225	Re	f. No.	_
AIA	reducer TP flow rate 16l/min light brown tolerance ±15%				
	No.	371226	Re	f. No.	_
WEV.	reducer TP flo	ow rate 20l/min rec	l toler	anc	

accessories for	370017					
	No.	371230	Ref. No.	_		
	reducer TP flow	rate 0.25I/min red	tolerance ±25%			
	No.	371231	Ref. No.	_		
	reducer TP flow	rate 0.35l/min vio	let tolerance ±25%	6		
<u> </u>	No.	371232	Ref. No.	_		
	reducer TP flow	rate 0.5l/min oran	ge tolerance ±25%	6		
-	No.	371233	Ref. No.	_		
	reducer TP flow	rate 0.8l/min whit	e tolerance ±25%			
-	No.	371234	Ref. No.	_		
	reducer TP flow rate 1I/min light blue tolerance ±25%					
-	No.	371235	Ref. No.	_		
	reducer TP flow rate 1.2l/min brown tolerance ±25%					
-	No.	371236	Ref. No.	_		
	reducer TP flow rate 1.5l/min light brown tolerance ±25%					
<u> </u>	No.	371237	Ref. No.	_		
	reducer TP flow rate 2.5l/min yellow tolerance ±25%					
-	No.	371238	Ref. No.	51100007		
	reducer TP flow rate 3.4l/min dark green tolerance ±25%					
	No.	371239	Ref. No.	_		
	reducer TP flow	rate 5l/min black	tolerance ±25%			
	No.	371240	Ref. No.	_		
	reducer TP flow	rate 8I/min blue to	olerance ±20%			







No. 370636 Ref. No. 51100021 description solenoid valve single CO 230VAC outlet 10.5mm MILANO 00168401 plastic 3-ways inlet 10.5mm 50/60Hz male faston 6.3mm accessories for 370636 No. 371142 Ref. No. — reducer for solenoid valve ø 8.2mm

metal SIRAI L140-B series 51110007 No. 370320 Ref. No. 51110015 solenoid valve brass 2-ways 24VAC inlet 1/2" outlet 1/2" connection $1/2^{\prime\prime}$ L 41mm DN 10mm slide-on receptacle compact -10 up to +90°C description SIRAI type series L140-B coil type Z610A membranes NBR (water) p max 12bar p min 0.35bar spare parts for 370320 371070 Ref. No. solenoid coil 24VAC 10VA SIRAI coil type Z610A seat ø 10mm 371163 Ref. No. membrane connection 1/2" series L140-B membrane type NBR (water) 370320 371091 Ref. No. No. power socket plug type DIN 43650B cable lengthmm small

pressure switches

for warewashing

ø 58mm with male faston 6.3mm


with connection horizontal




No.	541975	Ref. No.	50990005
description			60mbar connection 6mm ø Il warewashing pressure con-











Pressure transmitters No. 541149 Ref. No. 50990029 description pressure transmitter pressure range 0-30mbar output voltage 0.5-3.5VDC input voltage 5VDC max 200mbar

flow meters and flow sensors

flow meters




pumps

wash and rinse pumps

ALBA (C&A)



No.	500440	Ref. No.	50400089	(alternativ)	
description	pump inlet ø 62mm outlet ø 50mm type C12950 230/400V 50Hz 3 phase 0.89kW 1.2HP L 315mm rotation direction right ALBA PUMPS (C&A)				
spare parts for	500440				
	No.	510551	Ref. No.	50700022	
	pump cover gasket ID ø 158.3mm pump tvpe 1214/1293/1225/2243.				

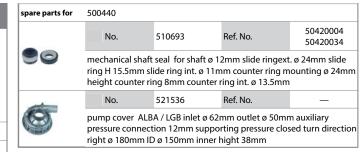

Pumps 1 No. 501446 Ref. No. 500400080

No.	501	446	Ref. No.	5004	100080	
otion	1 ph	pump inlet ø 28mm outlet ø 26mm type 4213E2250 220-240V 50Hz 1 phase 0.19kW 0.26HP L 190mm rotation direction left capacitor 5μF FIR				
oarts for	501	446				
		No.	365017	Ref. No.	50980004	
(4)	amk	oient tempera		450V tolerance 5% -85°C ø 28mm L 5 10.08 protection		
Dir.		No.	510384	Ref. No.	_	
0	pump cover inlet ø 28mm outlet ø 26mm ø 100mm ID ø 76mm					
		No.	510695	Ref. No.	_	
	mechanical shaft seal height counter ring 5.5mm ID ø 11mm					
L		No.	521203	Ref. No.	_	
		ellor ø 72mm nm blades 3	n H 18mm thread	M7 shaft ø 11mm	shaft length	
		No.	521703	Ref. No.	_	
)						

pump cover gasket EPDM thickness 2.5mm ID ø 75mm Qty 1 pcs



descrip

spare p





1					
No.	500527	Ref. No. 50400045			
description	pump inlet ø 60mm outlet ø 50/30mm type 2233.B140 230V 50Hz 1 phase 0.55kW 0.75HP L 210mm rotation direction right capacitor 12.5µF FIR inlet ø 60mm				
spare parts for	500527				
	No.	365014	Ref. No.	50980007	
Orac a	temperature max		uF 450V tolerance 5mm L 70mm M8 2.5 protection		
	No.	510552	Ref. No.	_	
0	pump cover gasket pump type 1292-2/3942/3981/3911/3983				
	No.	510608	Ref. No.	50410024	
	impellor ø 93mm H 32mm shaft intake ø 9/8mm blades 6 inner hight 11mm				
90	No.	510692	Ref. No.	_	
	mechanical shaft seal for shaft ø 11mm slide ringext. ø 24mm slide ring H 13mm counter ring mounting ø 26mm height counter ring 8mm counter ring int. ø 14mm				
	No.	521511	Ref. No.	50430022	
8	pump cover inlet ø 60mm outlet ø 50/30mm supporting pressure				

M12x1.75 supporting pressure open pump type 2233 turn direction

right ø 160mm ID ø 120mm inner hight 23mm



spare parts for	499139				
	No.	521026	Ref. No.	50700038	
	pump cover gask	et ID ø 182.5mm	thickness 5x4.5m	m	
4000	No.	521028	Ref. No.	50430032	
	pump cover FIR inlet ø 62mm outlet ø 62mm turn direction right ø 215mm ID ø 175mm inner hight 40mm				
	No.	521277	Ref. No.	50410019	
	impellor ø 135mm H 39mm pump type Fir 2275 - 3.6HP thread M14L				
**	No.	524676	Ref. No.	_	
	fan wheel ø 160mm shaft intake ø 24mm plastic blades 12 W 30mm				







1						
No.	501540	Ref. No.	504	00043		
description		pump inlet ø 63mm outlet ø 47mm type 422522726 230/400V 50Hz 3 phase 1.4kW 2HP L 280mm rotation direction right FIR				
spare parts for	501540					
ARTIN .	No.	510602	Ref. No.	50410026		
	impellor ø 110m ø 28mm seat ø 12		on direction right	thread M8L shaft		
	No.	510693	Ref. No.	50420004 50420034		
90	mechanical shaft seal for shaft ø 12mm slide ringext. ø 24mm slide ring H 15.5mm slide ring int. ø 11mm counter ring mounting ø 24mm height counter ring 8mm counter ring int. ø 13.5mm					
-	No.	521513	Ref. No.	50430016		
	pump cover FIR inlet ø 63mm outlet ø 47mm turn direction right ID ø 150mm inner hight 32mm					
	No.	524416	Ref. No.	_		
	pump cover gasket thickness 4x4mm Qty 1 pcs					



No.	500031	Ref. No.	504	00026	
description	pump inlet ø 63mm outlet ø 53mm type 1205.2528 230/400V 50Hz : phase 2kW 2.7HP L 330mm rotation direction left FIR				
spare parts for	500031	500031			
LIE	No.	510357	Ref. No.	50410023	
	impellor ø 124mm H 34/16mm thread M8R blades 6				
*	No.	510523	Ref. No.	_	
	fan wheel ø 142r	nm shaft intake ø	15mm blades 12		

spare parts for	500031				
	No.	510531	Ref. No.	_	
	pump cover FIR inlet ø 63mm outlet ø 53mm auxiliary pressure connection M16x1.5mm supporting pressure open turn direction left ø 185mm ID ø 150mm inner hight 37mm				
	No.	510693	Ref. No.	50420004 50420034	
90	mechanical shaft seal for shaft ø 12mm slide ringext. ø 24mm slide ring H 15.5mm slide ring int. ø 11mm counter ring mounting ø 24mm height counter ring 8mm counter ring int. ø 13.5mm				
\bigcirc	No.	524416	Ref. No.	_	
	pump cover gasket thickness 4x4mm Qty 1 pcs				







1			/ 1		
No.	500461	500461 Ref. No. 50920218			
description		32mm outlet ø 32mi 180mm capacitor 1	, i	30V 50Hz 1 phase	
spare parts for	500461				
	No.	502267	Ref. No.	_	
	pump cover				
	No.	510702	Ref. No.	_	
90	mechanical shaft seal height counter ring 5.5mm ID ø 12mm				
	No.	521042	Ref. No.	_	
	impellor ø 103mm H 14mm pump type ZF210SX thread M10L				
\bigcirc	No.	532719	Ref. No.	_	
	O-ring EPDM thickness 2.62mm ID ø 126.67mm Qty 1 pcs				
accessories for	500461				
	No.	365014	Ref. No.	50980007	
0		acitor capacity 12.5 nax25 to +85°C ø 3			


on male faston 6.3mm 45S.C3DS.12.5 protection







1						
No.	499257	Ref. No.	504	00070		
description		pump inlet ø 1″ IT outlet ø 30mm type L63.T45F_2V 230V 50Hz 1 phase 0.33kW L 230mm rotation direction left capacitor 8μF OLYMPIA				
spare parts for	499257	499257				
1.30	No.	365013	Ref. No.	_		
a		5 to +85°C ø 31.5n	400V tolerance 5% nm L 55mm M8 pl			
	No.	509007	Ref. No.	_		
9	impellor ø 85mm H 20mm rotation direction left thread M10R shaft ø 12mm shaft length 7.5mm blades 12					
90	No.	510693	Ref. No.	50420004 50420034		
	mechanical shaft seal for shaft ø 12mm slide ringext. ø 24mm slide ring H 15.5mm slide ring int. ø 11mm counter ring mounting ø 24mm height counter ring 8mm counter ring int. ø 13.5mm					
10	No.	521167	Ref. No.	_		
	pump cover OLYMPIA inlet ø 1"mm outlet ø 30/30mm ID ø 94mm					
	No.	521723	Ref. No.	50700021		
	pump cover gasket EPDM thickness 2mm ID ø 90mm Qty 1 pcs					



description	pump inlet ø 15mm outlet ø 14mm type T.33PRS 230V 50Hz 1 phase 0.25kW L 185mm rotation direction right capacitor 8µF OLYMPIA				
spare parts for	499095				
· in	No.	365013	Ref. No.	_	
	operating capacitor capacity 8µF 400V tolerance 5%Hz ambient temperature max25 to +85°C ø 31.5mm L 55mm M8 plastic connection				

male faston 6.3mm protection

spare parts for	499095					
90	No.	510693	Ref. No.	50420004 50420034		
	mechanical shaft seal for shaft ø 12mm slide ringext. ø 24mm slide ring H 15.5mm slide ring int. ø 11mm counter ring mounting ø 24mm height counter ring 8mm counter ring int. ø 13.5mm					
Andreille	No.	521165	Ref. No.	_		
	pump cover OLYMPIA inlet ø 15mm outlet ø 13mm pump type R63. T33 PRS					
0	No.	521166	Ref. No.	_		
	impellor ø 90mm H 9mm pump type R63.T33 PRS thread M10R shaft ø 12mm shaft length 8mm					
	No.	525022	Ref. No.	50700088		
	O-ring EPDM thickness 1.78mm ID ø 75.92mm Qty 1 pcs					









1				
No.	500520 Ref. No. 50400068			00068
description		mm outlet ø 30/28 34HP L 190mm rot		
spare parts for	500520			
-10	No.	365017	Ref. No.	50980004
	ambient temper	itor capacity 5µF 4 ature max25 to + e faston 6.3mm 16.	+85°C ø 28mm L 5∙	
	No.	510693	Ref. No.	50420004 50420034
90	mechanical shaft seal for shaft ø 12mm slide ringext. ø 24mm slide ring H 15.5mm slide ring int. ø 11mm counter ring mounting ø 24mm height counter ring 8mm counter ring int. ø 13.5mm			
	No.	521151	Ref. No.	_
	impellor ø 71mm H 19mm pump type OLYMPIA thread M10R shaft ø 12mm shaft length 8mm			
	No.	521551	Ref. No.	50430021
-	pump cover OLYMPIA inlet ø 33mm outlet ø 30mm outlet 2 ø 28 turn direction left ø 103mm ID ø 93mm inner hight 30mm			
	No.	521723	Ref. No.	50700021

pump cover gasket EPDM thickness 2mm ID ø 90mm Qty 1 pcs



	300730	 30 10007 1
description		m type T45 230V 50Hz 1 on direction left capacitor 8μF

365013


spare parts for 500958

· Ca


operating capacitor capacity $8\mu F$ 400V tolerance 5%Hz ambient temperature max. -25 to +85°C ø 31.5mm L 55mm M8 plastic connection male faston 6.3mm protection

Ref. No.


spare parts for	500958			
	No.	510693	Ref. No.	50420004 50420034
90	ring H 15.5mm s	lide ring int. ø 11m	2mm slide ringext nm counter ring m ring int. ø 13.5mm	ounting ø 24mm
	No.	521257	Ref. No.	50410025 50410054
	impellor ø 80mm H 12mm rotat 12mm shaft length 7.5mm blad			ead M10R shaft ø
	No.	521551	Ref. No.	50430021
-			m outlet ø 30mm (inner hight 30mm	
	No.	521723	Ref. No.	50700021
\bigcirc	pump cover gask	ket EPDM thickne	ss 2mm ID ø 90mr	n Qty 1 pcs

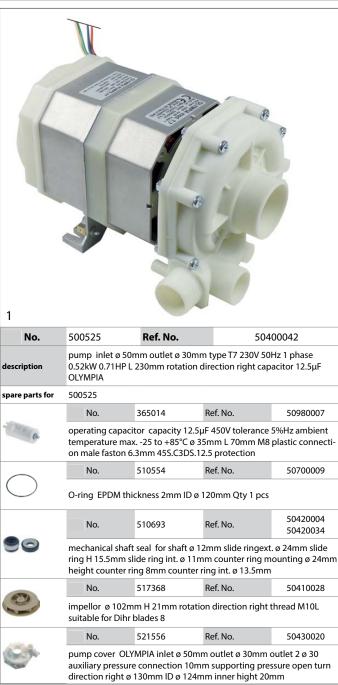



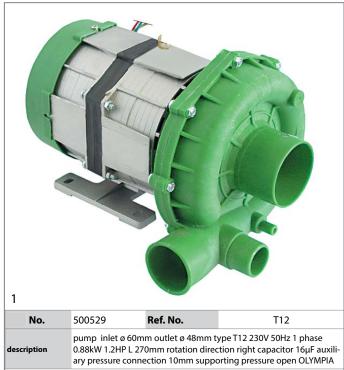


No.	500529	Ref. No.	7	12	
description	pump inlet ø 60mm outlet ø 48mm type T12 230V 50Hz 1 phase 0.88kW 1.2HP L 270mm rotation direction right capacitor 16µF auxil ary pressure connection 10mm supporting pressure open OLYMPIA				
spare parts for	500529				
	No.	365021	Ref. No.	_	
6	ent temperature	max25 to +85°C		capacitor 16µF auxilissure open OLYMPIA ———————————————————————————————————	
	No.	510693	Ref. No.		
90	mechanical shaft seal for si ring H 15.5mm slide ring in height counter ring 8mm c	ide ring int. ø 11m	nm counter ring m		
	No.	521010	Ref. No.	_	
(8)	impellor ø 98mm H 12mm M10L blades 8				
	No.	521559	Ref. No.	50430019	
	auxiliary pressure	connection 10m	m outlet ø 48mm o m supporting pres nm inner hight 22r	ssure open turn	
	No.	521727	Ref. No.	50700023	
	pump cover gask	et EPDM thicknes	ss 1.78mm ID ø 14	5mm Qty 1 pcs	

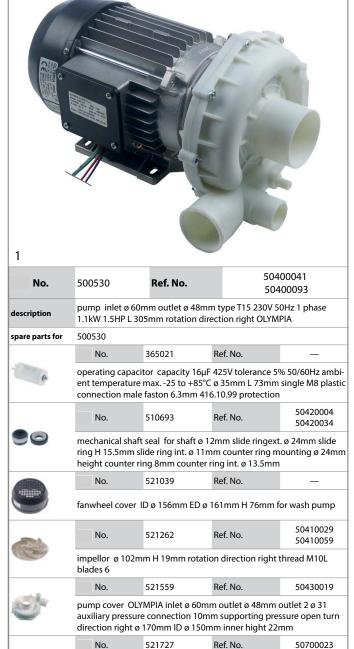

pump cover gasket EPDM thickness 1.78mm ID ø 145mm Qty 1 pcs





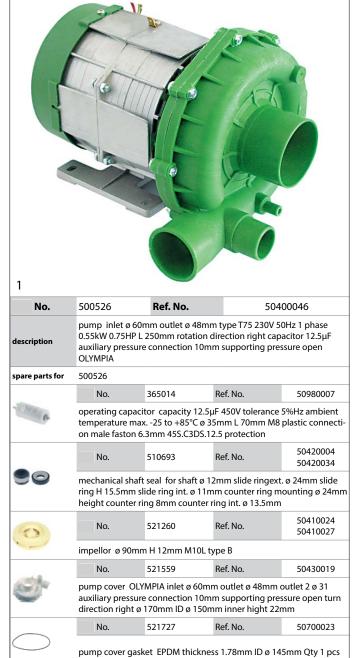



booster pumps I





ASKOLL No. 500202 Ref. No. 50400039

drain pump inlet ø 24mm outlet ø 22mm 230V 40W

1 No. 365014 Ref. No. 50980007 operating capacitor capacity 12.5μF 450V tolerance 5%Hz ambient temperature max. -25 to +85°C Ø 35mm L 70mm M8 plastic connection male faston 6.3mm 45S.C3DS.12.5 protection

booster pumps II

description






condensators & interference suppression filters

operating capacitors





filters



electric accessories

cables

ribbon cables group 1 No. 400066 Ref. No. 50320206 50820123 50920123 50920206 description ribbon cable 10-pole L 1000mm plug type FC-10P raster size 2.54mm





terminals

connection terminals with screw/faston connections



No. 550278 **Ref. No.** 50970001

power terminal block 3-pole max. 40A max 400V connection ø6mm² / F6.3 temp.-resist. 150°C cross section 6mm²

equipment-specific units

for espresso machines

brewing units

filter holder gaskets

O-rings



No.	510409	Ref. No.	50700015 50700016
description	O-ring EPDM thick	kness 5.34mm ID ø	56.52mm Qty 1 pcs

steam/water taps

steam/water pipes

accessories

gaskets



No.	510893	Ref. No.	50700004
description	O-ring EPDM thick	ness 2.62mm ID ø	9.92mm Qty 1 pcs

intake valves

intake valves



No.	531009	Ref. No.	50110010
escription	intake valve for LA ROCCA		

for coffee grinders

grinding burrs

screw



No.	560365	Ref. No.	51310013
description	flat-headed bolt th 1 pcs intake Phillip		3mm SS DIN 7985/ISO 7045 Qty d thickness 3mm

for dishwashers

containers

salt tanks



1				
No.	517396	Ref. No.	51400007	
description	lescription lid ø 69mm H 19mm for salt tank ID ø 50.5mm			



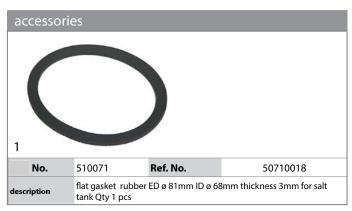


Table continues overleaf














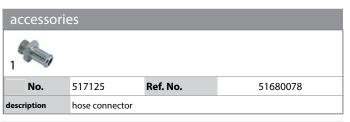























hood mechanics for dishwashers bushes No. 512423 Ref. No. 51210286 description bush for hood handle











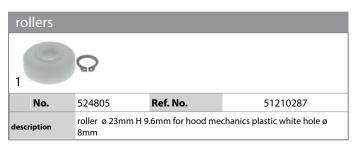


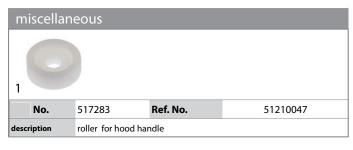








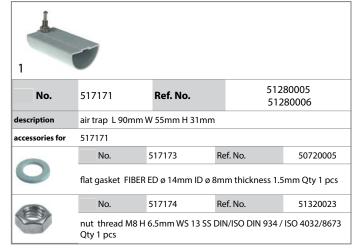



backflow preventers						
accessor	accessories					
1						
No.	996010	Ref. No.	51650034			
description ball ø 16mm						

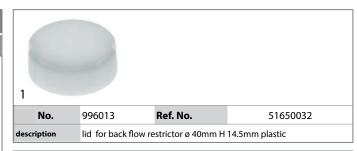




door mechanics					
linkage	linkage				
1					
No.	517269	Ref. No.	51210245		
description	door pin tie b	oar			




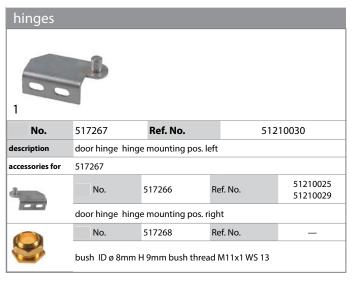







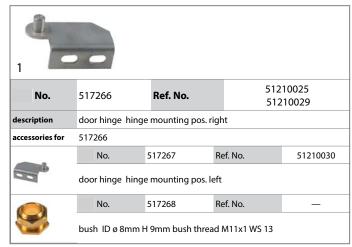







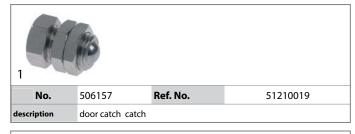










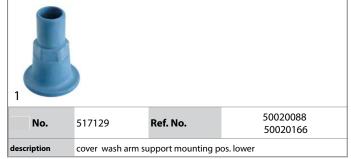











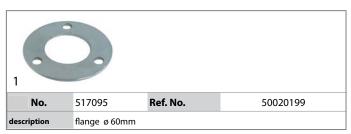













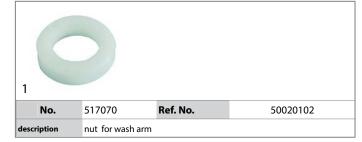





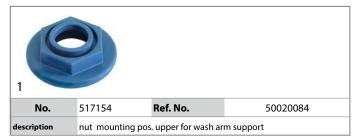




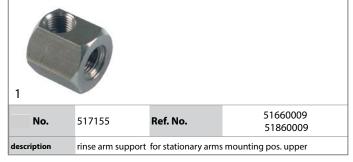

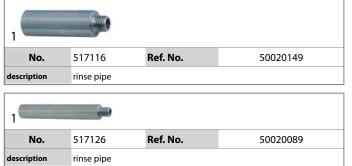






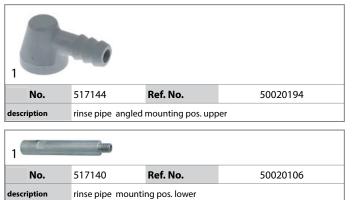





















hinges
















gaskets










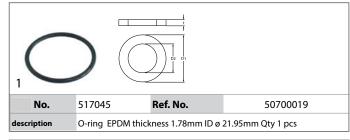








































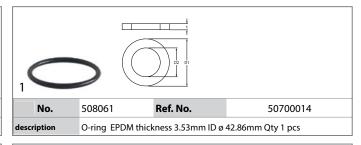























































transmission technology and ball bearings





springs

tension springs No. 517273 Ref. No. 51210059 tension spring ø 10mm total length 225mm wire gauge ø 1.5mm




1					
No.	517272	Ref. No.	51210037		
description	tension spring ø 1 mounting pos. lov		40mm wire gauge ø 2mm		





dosing pumps





¹with accessories







membrane dosing pumps


self-priming



No.	361731	Ref. No.	50100003
	J 1	, ,	ure connection rinse aid inlet n ø 8mm suction connection ø



No.	361704	Ref. No.	51660007
description	hose connector bi	rass straight thread	M12x1 hose ø 11mm Qty 1 pcs



self-priming with supporting pressure

DIHR



No.	361912	Ref. No.	50100013
description	dosing pump kit i auxiliary pressure		nm suction connection ø 5mm



1				
No.	Ref. No. 50100001			00001
description	dosing pump type DW with auxiliary pressure connection rinse aid inlet 4mm outlet 8mm suction connection ø 4mm auxiliary pressure connection 10mm			
spare parts for	361744			
	No.	520026	Ref. No.	_
	PVC hose ID ø 4mm ED ø 6mm L 10m thickness 1mm t.max. 60°C transparent			
	No.	520090	Ref. No.	_
	PVC hose ID ø 4mm ED ø 6mm L 2m thickness 1mm t.max. 60°C transparent			

accessories



non-return valves



No.	361899	Ref. No.	50110009
description	non-return valve i	nletmm outlet ø 7n	nm L 9mm Qty 2 pcs

hose couplings



•			
No.	361090	Ref. No.	51640033
description	hose connector h	ose ø 4x6mm conne	ection M10x1


tank inlets



No.	361057	Ref. No.	50120003	
description tank inlet plastic M10 hose ø 4x6mm				










hoses





















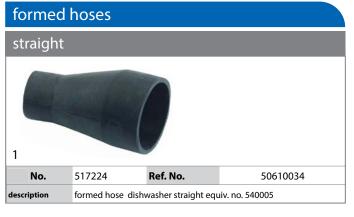


































fittings, hose and pipe connectors











ancillary products

clamps

hose clamps

DIN 3017 - W2



No.	520112	Ref. No.	51340004 51340005
description	hose clamp ø 12-2	0mm width 9mm 0	Qty 10 pcs DIN 3017

1

No. 520115 Ref. No. 51340006

description hose clamp Ø 25-40mm width 9mm Qty 10 pcs DIN 3017


measuring equipment

thermometers

built-in thermometers

 No.
 541086
 Ref. No.
 51030003

 description
 thermometer mounting measurements 58x25.5mm 0 up to +120°C capillary pipe 2000mm probe ø 6mm probe L 23mm

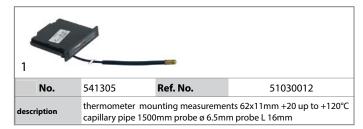

fastening material

screws

flat-headed bolts



No.	560365	Ref. No.	51310013
description	flat-headed bolt th 1 pcs intake Phillip		8mm SS DIN 7985/ISO 7045 Qty d thickness 3mm

knurled screws



No.	517039	Ref. No.	50020107
			50020117
description	Thumb screw thread M8x1.25 thread L 8mm ø 30mm H 3 mounting pos. lower		L 8mm ø 30mm H 3mm SS

nuts

hexagonal nuts

DIN 934 / ISO 4032/8673



No.	517174	Ref. No.	51320023
description	nut thread M8 H 6 Qty 1 pcs	.5mm WS 13 SS DIN	N/ISO DIN 934 / ISO 4032/8673

hexagonal nuts inch thread



No.	517180	Ref. No.	50510025
description	nut thread 1" H 5r	mm WS 36 SS Qty 1	pcs







fasteners clamps hose clamps DIN 3017 - W2 No. 520112 Ref. No. 51340004 51340005 description hose clamp ø 12-20mm width 9mm Qty 10 pcs DIN 3017



